


Montageanleitung

M8 x 1 konfektionierbar mit Schraubanschluss für Stecker/Kupplung 3pol/4pol



Montager Reihenfolge

1 Klemmmutter, Kabeldichtung und Gehäuse auf das Kabel schieben

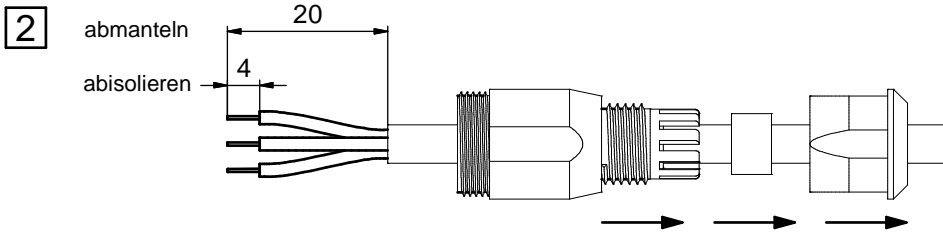


3 Litzen nacheinander in die Öffnungen bis zum Anschlag einführen (Einzellitzen dürfen nicht abstehen!)

4 Schr. M2 mit Innensechskantschlüssel SW 0,9 anziehen
Empfohlenes Drehmoment: 0,1 Nm

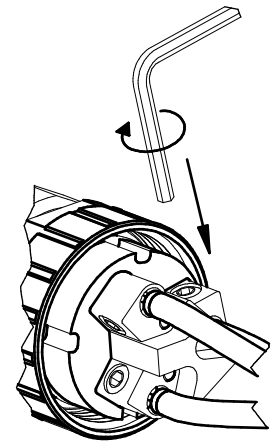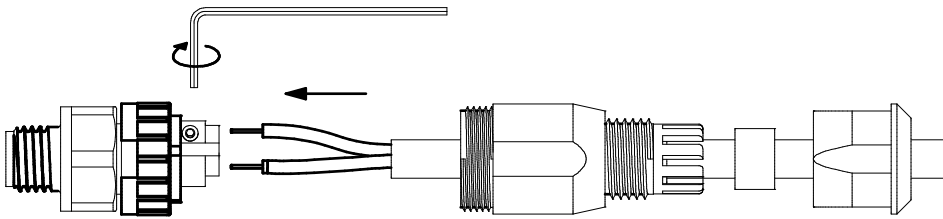


5 Gehäuse mittels Gehäusemutter verschrauben


6 Kabeldichtung in das Gehäuse schieben

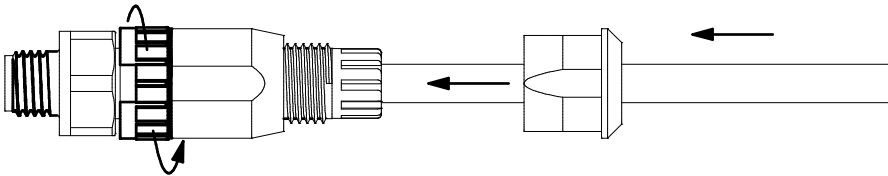

7 Klemmmutter verschrauben

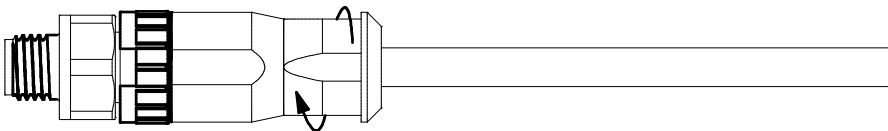


Schablone für Abisolierung (1:1)

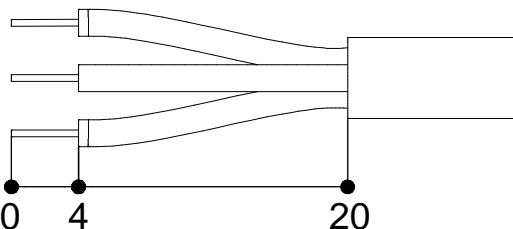


Kabel	Litze
Ø4 - 5,5mm	0,14 - 0,50mm ² AWG 26 - 20

Assembly instructions

M8 x 1 field attachable with screw termination for male/female connector 3pos/4pos



 assembly sequence

1 slide clamping nut, cable sealing and housing over the cable

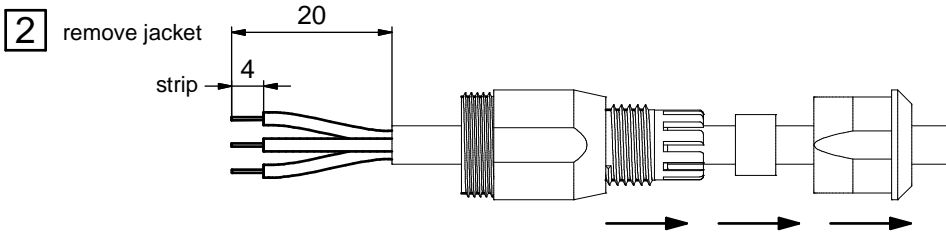


3 insert stripped wires into holes until end stop (wire strands must not stick out!)

4 fix screw M2 with hexagon wrench width AF 0,9
Recommended torque: 0,1Nm

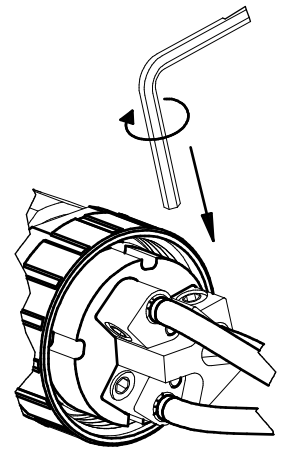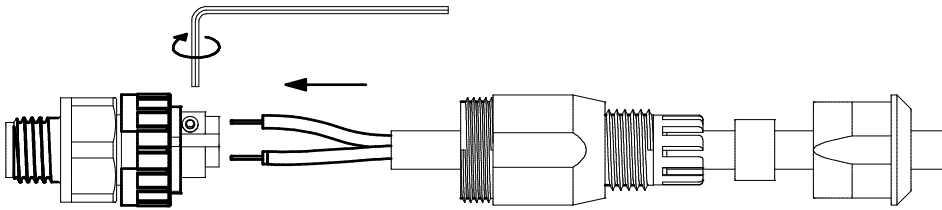


5 mount housing with housing nut


6 slide cable sealing into housing

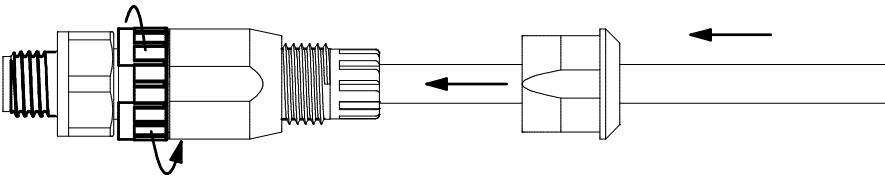

7 mount clamping nut

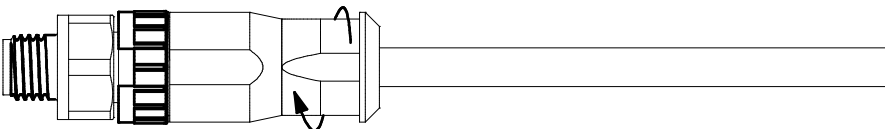

Pattern for stripping (1:1)

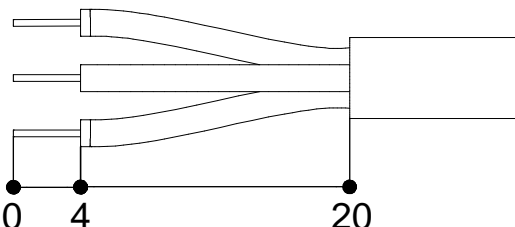

cable	wire
$\varnothing 4 - 5,5\text{mm}$	$0,14 - 0,50\text{mm}^2$ AWG 26 - 20