

Documentation | EN

KL1xxx and KS1xxx

Bus terminals with digital inputs, 24 V DC

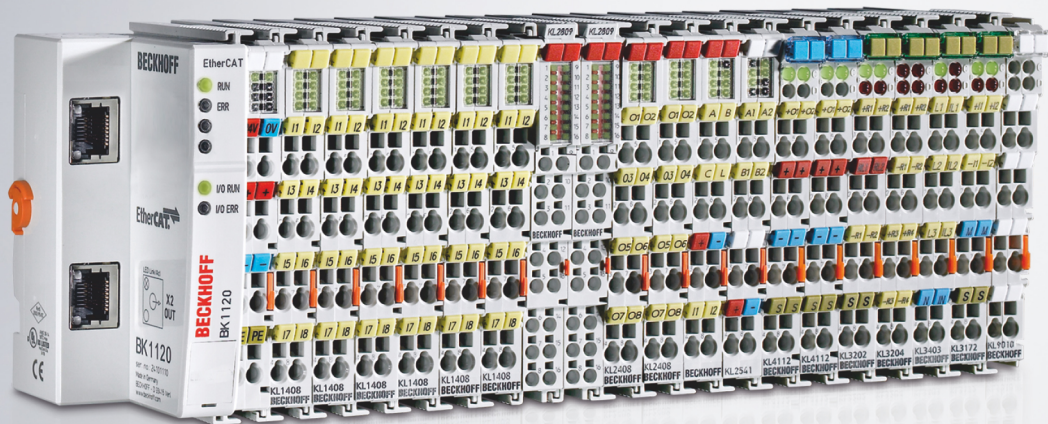


Table of contents

1 Foreword	7
1.1 Notes on the documentation	7
1.2 Safety instructions	8
1.3 Documentation issue status	9
1.4 Suggestions or proposals for documentation	10
2 Product overview	11
2.1 KL1002, KL1012 – Introduction	12
2.1.1 KL1002, KL1012 - Technical data	13
2.1.2 KL1002 - LEDs and connection	14
2.1.3 KL1012 - LEDs and connection	15
2.2 KL1052 - Introduction	16
2.2.1 KL1052 - Technical data	17
2.2.2 KL1052 - LEDs and connection	18
2.3 KL1104, KL1114 - Introduction	19
2.3.1 KL1104, KL1114 - Technical data	20
2.3.2 KL1104, KL1114 - LEDs and connection	21
2.4 KL1154 - Introduction	22
2.4.1 KL1154 - Technical data	23
2.4.2 KL1154 - LEDs and connection	24
2.5 KL1164 - Introduction	25
2.5.1 KL1164 - Technical data	26
2.5.2 KL1164 - LEDs and connection	27
2.6 KL1184 - Introduction	28
2.6.1 KL1184 - Technical data	29
2.6.2 KL1184 - LEDs and connection	30
2.7 KL1194 - Introduction	31
2.7.1 KL1194 - Technical data	32
2.7.2 KL1194 - LEDs and connection	33
2.8 KL1212 - Introduction	34
2.8.1 KL1212 - Technical data	35
2.8.2 KL1212 - LEDs and connection	36
2.9 KL1302 - Introduction	37
2.9.1 KL1302 - Technical data	38
2.9.2 KL1302 - LEDs and connection	39
2.10 KL1304 - Introduction	40
2.10.1 KL1304 - Technical data	41
2.10.2 KL1304 - LEDs and connection	42
2.11 KL1312 - Introduction	43
2.11.1 KL1312 - Technical data	44
2.11.2 KL1312 - LEDs and connection	45
2.12 KL1314 - Introduction	46
2.12.1 KL1314 - Technical data	47
2.12.2 KL1314 - LEDs and connection	48
2.13 KL1402, KL1412 - Introduction	49

2.13.1	KL1402, KL1412 – Technical data	50
2.13.2	KL1402, KL1412 - LEDs and connection	51
2.14	KL1404, KL1414 - Introduction	52
2.14.1	KL1404, KL1414 - Technical data	53
2.14.2	KL1404, KL1414 - LEDs and connection	54
2.15	KL1434 - Introduction	55
2.15.1	KL1434 - Technical data	56
2.15.2	KL1434 - LEDs and connection	57
2.16	KL1408, KL1418, KL1488, KL1498 - introduction	58
2.16.1	KL1408, KL1418, KL1488, KL1498 - Technical data	60
2.16.2	KL1408, KL1418 - LEDs and connection	61
2.16.3	KL1488, KL1498 - LEDs and connection	62
2.17	KL1804, KL1814 - Introduction	63
2.17.1	KL1804, KL1814 – Technical data	64
2.17.2	KL1804, KL1814 - LEDs and connection	65
2.18	KL1808 - Introduction	66
2.18.1	KL1808 - Technical data	67
2.18.2	KL1808 - LEDs and connection	68
2.19	KL1809 - Introduction	69
2.19.1	KL1809 - Technical data	70
2.19.2	KL1809 - LEDs and connection	71
2.20	KL1819 - Introduction	72
2.20.1	KL1819 - Technical data	73
2.20.2	KL1819 - LEDs and connection	74
2.21	KL1859 - Introduction	75
2.21.1	KL1859 - Technical data	76
2.21.2	KL1859 - LEDs and connection	77
2.22	KL1862, KL1862-0010, KL1872 - Introduction	78
2.22.1	KL1862, KL1862-0010, KL1872 - Technical data	79
2.22.2	KL1862, KL1862-0010, KL1872 - LEDs and connection	80
2.23	KL1889 - Introduction	81
2.23.1	KL1889 - Technical data	82
2.23.2	KL1889 - LEDs and connection	83
3	Mounting and wiring	84
3.1	Instructions for ESD protection	84
3.2	Installation on mounting rails	85
3.3	Disposal	87
3.4	Installation instructions for enhanced mechanical load capacity	88
3.5	Connection	89
3.5.1	Connection system	89
3.5.2	Wiring	91
3.5.3	Shielding	92
3.6	ATEX - Special conditions (standard temperature range)	93
3.7	ATEX - Special conditions (extended temperature range)	94
3.8	IECEx - Special conditions	95
3.9	Continuative documentation for ATEX and IECEx	95

1 Foreword

1.1 Notes on the documentation

Intended audience

This description is only intended for the use of trained specialists in control and automation engineering who are familiar with the applicable national standards.

It is essential that the documentation and the following notes and explanations are followed when installing and commissioning these components.

The qualified personnel is obliged to always use the currently valid documentation.

The responsible staff must ensure that the application or use of the products described satisfy all the requirements for safety, including all the relevant laws, regulations, guidelines and standards.

Disclaimer

The documentation has been prepared with care. The products described are, however, constantly under development.

We reserve the right to revise and change the documentation at any time and without prior announcement.

No claims for the modification of products that have already been supplied may be made on the basis of the data, diagrams and descriptions in this documentation.

Trademarks

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered trademarks of and licensed by Beckhoff Automation GmbH.

Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.



EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Copyright

© Beckhoff Automation GmbH & Co. KG, Germany.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization are prohibited.

Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Third-party brands

Trademarks of third parties may be used in this documentation. You can find the trademark notices here:

<https://www.beckhoff.com/trademarks>

1.2 Safety instructions

Safety regulations

Please note the following safety instructions and explanations!

Product-specific safety instructions can be found on following pages or in the areas mounting, wiring, commissioning etc.

Exclusion of liability

All the components are supplied in particular hardware and software configurations appropriate for the application. Modifications to hardware or software configurations other than those described in the documentation are not permitted, and nullify the liability of Beckhoff Automation GmbH & Co. KG.

Personnel qualification

This description is only intended for trained specialists in control, automation and drive engineering who are familiar with the applicable national standards.

Signal words

The signal words used in the documentation are classified below. In order to prevent injury and damage to persons and property, read and follow the safety and warning notices.

Personal injury warnings

DANGER

Hazard with high risk of death or serious injury.

WARNING

Hazard with medium risk of death or serious injury.

CAUTION

There is a low-risk hazard that could result in medium or minor injury.

Warning of damage to property or environment

NOTICE

The environment, equipment, or data may be damaged.

Information on handling the product



This information includes, for example:
recommendations for action, assistance or further information on the product.

1.3 Documentation issue status

Version	Comment
1.2.0	- KL1052/KS1052, KL1154/KS1154 and KL1164/KS1164 added - KL1184/KS1184, KL1194/KS1194 and KL1212/KS1212 added - KL1302/KS1302, KL1304/KS1304, KL1312/KS1312 and KL1314/KS1314 added - KL1804, KL1814, KL1808, KL1818, KL1809, KL1819, KL1859 and KL1889 added - Technical data updated - Approvals and markings updated - Chapter <i>Disposal</i> added - Links to the TwinCAT libraries updated
1.1.0	- Ex markings added to the technical data - Notes on ESD protection added - New title page
1.0.0	- Migration - Document structure updated - Technical data updated - Installation instructions for enhanced mechanical load capacity added

Firmware and hardware versions

Documentation Version	KL1002/KS1002		KL1012/KS1012		KL1052/KS1052		KL1104/KS1104	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	05	00	05	00	04	00	05
1.1.0	00	05	00	05	-	-	00	05
1.0.0	00	05	00	05	-	-	00	05

Documentation Version	KL1114/KS1114		KL1154/KS1154		KL1164/KS1164		KL1184/KS1184	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	05	00	04	00	04	00	04
1.1.0	00	05	-	-	-	-	-	-
1.0.0	00	05	-	-	-	-	-	-

Documentation Version	KL1194/KS1194		KL1212/KS1212		KL1302/KS1302		KL1304/KS1304	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	04	00	03	00	02	00	03
1.1.0	-	-	-	-	-	-	-	-
1.0.0	-	-	-	-	-	-	-	-

Documentation Version	KL1312/KS1312		KL1314/KS1314		KL1402/KS1402		KL1412/KS1412	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	01	00	02	00	01	00	01
1.1.0	-	-	-	-	00	01	00	01
1.0.0	-	-	-	-	00	01	00	01

Documentation Version	KL1404/KS1404		KL1408/KS1408		KL1414/KS1414		KL1418/KS1418	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	04	00	02	00	00	00	07
1.1.0	00	04	00	02	00	00	00	07
1.0.0	00	04	00	02	00	00	00	07

Documentation Version	KL1434/KS1434		KL1488/KS1488		KL1498/KS1498		KL1804	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	08	00	02	00	03	00	00
1.1.0	00	08	00	02	00	03	-	-
1.0.0	00	08	00	02	00	02	-	-

Documentation Version	KL1814		KL1808		KL1809		KL1819	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	00	00	01	00	02	00	01
1.1.0	-	-	-	-	-	-	-	-
1.0.0	-	-	-	-	-	-	-	-

Documentation Version	KL1859		KL1862		KL1862-0010		KL1872	
	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware	Firmware	Hardware
1.2.0	00	00	00	01	00	00	00	00
1.1.0	-	-	-	01	00	00	00	00
1.0.0	-	-	-	01	00	00	00	00

Documentation Version	KL1889	
	Firmware	Hardware
1.2.0	00	00
1.1.0	-	-
1.0.0	-	-

The K-bus firmware and hardware version (delivery state) are indicated by the serial number printed at the side of the terminal.

Syntax of the serial number

Structure of the serial number: WW YY FF HH

WW - week of production (calendar week)

YY - year of production

FF - K-bus firmware version

HH - hardware version

Example with serial number 49 05 1B 03:

49 - week of production 49

05 - year of production 2005

1B - firmware version 1B

03 - hardware version 03

1.4 Suggestions or proposals for documentation

If you have any suggestions or proposals for our documentation, please send us an e-mail stating the documentation title and version number to: documentation@beckhoff.com

2 Product overview

Digital input terminals

Terminal	Number of inputs	Nominal voltage	Filter typ.	Comment
KL1002, KS1002 [► 12]	2	24 V _{DC}	3 ms	
KL1012, KS1012 [► 12]	2	24 V _{DC}	0.2 ms	
KL1052 [► 16]	2	24 V _{DC}	3 ms	
KL1104, KS1104 [► 19]	4	24 V _{DC}	3 ms	
KL1114, KS1114 [► 19]	4	24 V _{DC}	0.2 ms	
KL1154 [► 22]	4	24 V _{DC}	3 ms	
KL1164 [► 25]	4	24 V _{DC}	0.2 ms	
KL1184 [► 28]	4	24 V _{DC}	3 ms	
KL1194 [► 31]	4	24 V _{DC}	0.2 ms	
KL1212 [► 34]	2	24 V _{DC}	3 ms	
KL1302 [► 37]	2	24 V _{DC}	3 ms	
KL1304 [► 40]	4	24 V _{DC}	3 ms	
KL1312 [► 43]	2	24 V _{DC}	0.2 ms	
KL1314 [► 46]	4	24 V _{DC}	0.2 ms	
KL1402, KS1402 [► 49]	2	24 V _{DC}	3 ms	
KL1412, KS1412 [► 49]	2	24 V _{DC}	0.2 ms	
KL1404, KS1404 [► 52]	4	24 V _{DC}	3 ms	
KL1408, KS1408 [► 58]	8	24 V _{DC}	3 ms	
KL1414, KS1414 [► 52]	4	24 V _{DC}	0.2 ms	
KL1418, KS1418 [► 58]	8	24 V _{DC}	0.2 ms	
KL1434, KS1434 [► 52]	4	24 V _{DC}	0.2 ms	
KL1488, KS1488 [► 58]	8	24 V _{DC}	3 ms	
KL1498, KS1498 [► 58]	8	24 V _{DC}	0.2 ms	
KL1804 [► 63]	4	24 V _{DC}	3 ms	
KL1808 [► 66]	8	24 V _{DC}	3 ms	
KL1809 [► 69]	16	24 V _{DC}	3 ms	
KL1814 [► 63]	4	24 V _{DC}	0.2 ms	
KL1859 [► 75]	8	24 V _{DC}	3 ms	
KL1819 [► 72]	16	24 V _{DC}	0.2 ms	
KL1862-0000 [► 78]	16	24 V _{DC}	3 ms	
KL1862-0010 [► 78]	16	24 V _{DC}	3 ms	
KL1872 [► 78]	16	24 V _{DC}	0.2 ms	
KL1889 [► 81]	16	24 V _{DC}	3 ms	

2.1 KL1002, KL1012 – Introduction

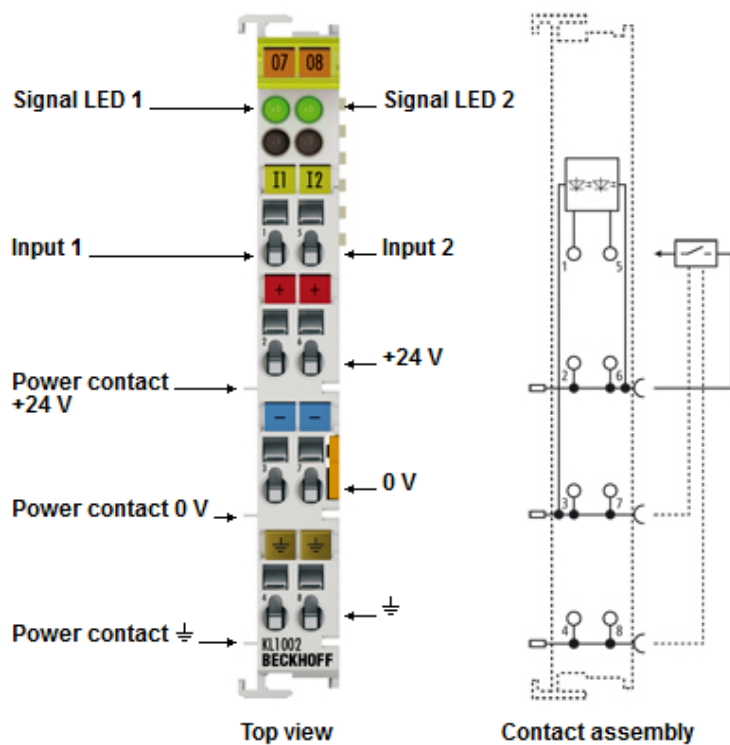


Fig. 1: KL1002

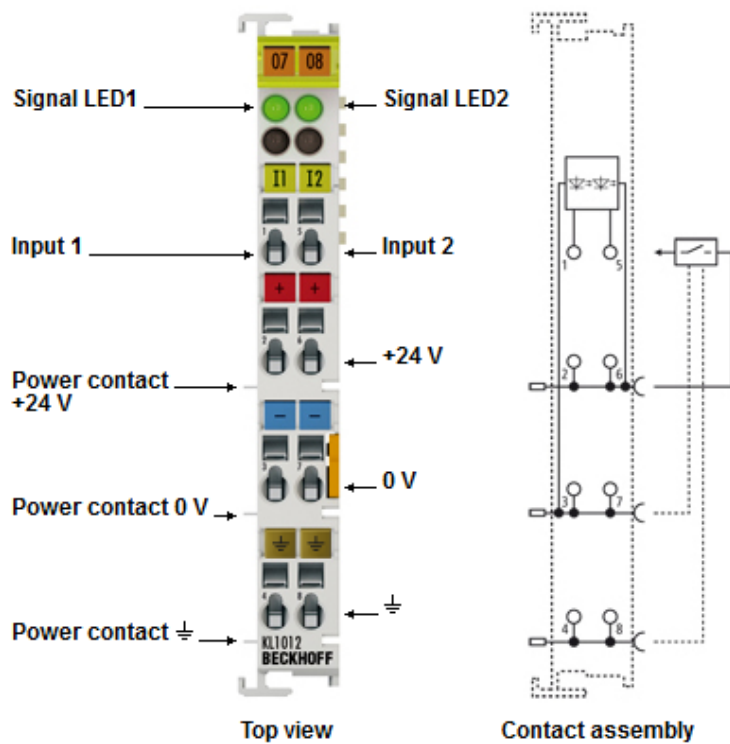


Fig. 2: KL1012

Bus terminal, 2-channel digital input, 24 V_{DC}

The KL1002 and KL1012 digital input terminals acquire the binary control signals from the process level and transmit them, in an electrically isolated form, to the higher-level automation device. The KL1002 and KL1012 versions have input filters of different speeds. The bus terminals contain two channels that indicate their signal state by means of light emitting diodes.

2.1.1 KL1002, KL1012 - Technical data

Technical data	KL1002, KS1002	KL1012, KS1012
Connection technology	4-wire	
Specification	EN 61131-2, type 1	
Number of counters	2	
Nominal voltage	24 V _{DC} (-15 %/+20 %)	
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1)	
Signal voltage '1'	15 V ... 30 V (EN 61131-2, type 1)	
Input filter	typ. 3 ms	typ. 0.2 ms
Input current	typ. 5 mA (EN 61131-2, type 1)	
Current consumption from K-bus	typ. 3 mA	
Electrical isolation	500 V (K-bus / field voltage)	
Bit width in process image	2 input bits	
Configuration	no address or configuration settings required	
Dimensions	12 mm x 100 mm x 68 mm	
Weight	approx. 50 g	
Permissible ambient temperature during operation	-25 °C ... +60 °C	
Permissible ambient temperature during storage	-40 °C ... +85 °C	
Permissible relative humidity	95%, no condensation	
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity	
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27	
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4	
Installation position	variable	
Protection rating	IP20	
Pluggable wiring	for all KSxxxx terminals	
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.1.2 KL1002 - LEDs and connection

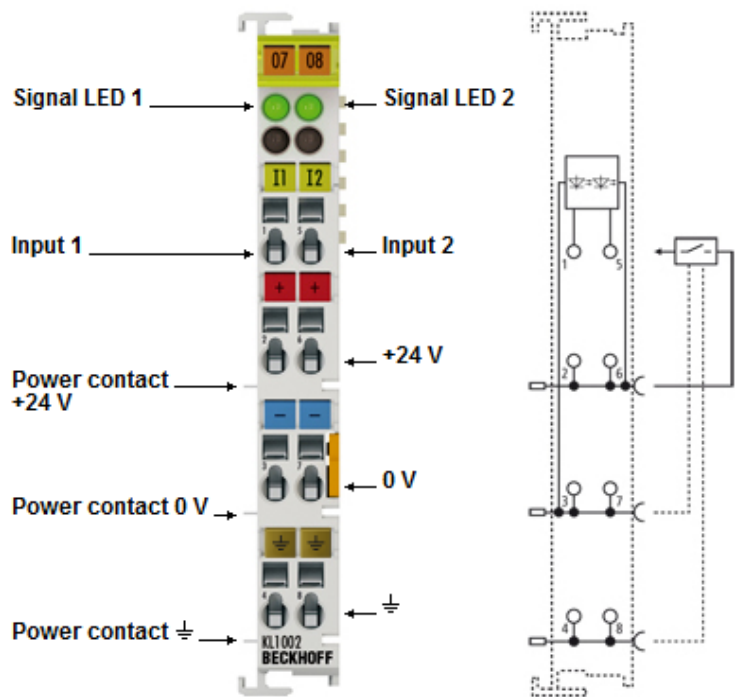


Fig. 3: KL1002 - LEDs and connection

KL1002 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (15 V ... 30 V)

KL1002 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
⏏	4	⏏ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
⏏	8	⏏ (internally connected to terminal point 4)

2.1.3 KL1012 - LEDs and connection

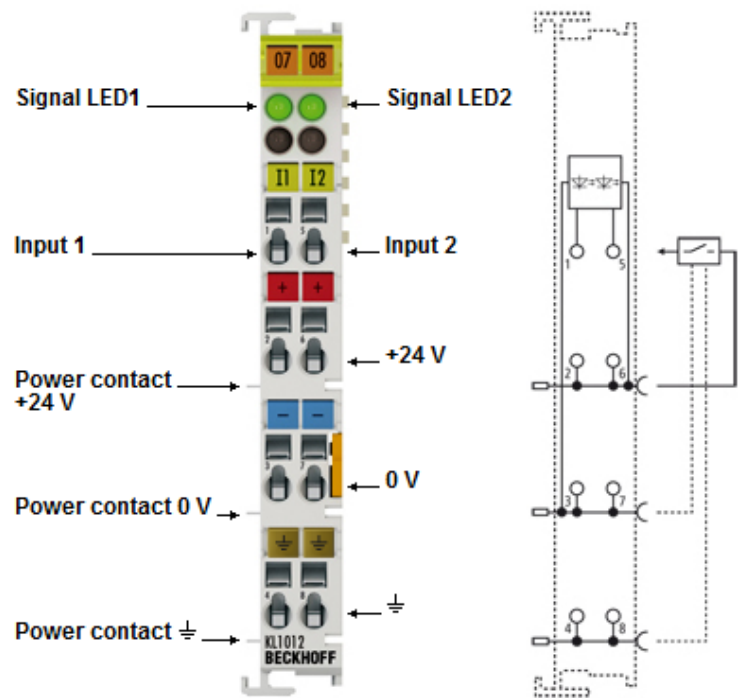


Fig. 4: KL1012 - LEDs and connection

KL1012 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (15 V ... 30 V)

KL1012 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
⏏	4	⏏ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
⏏	8	⏏ (internally connected to terminal point 4)

2.2 KL1052 - Introduction

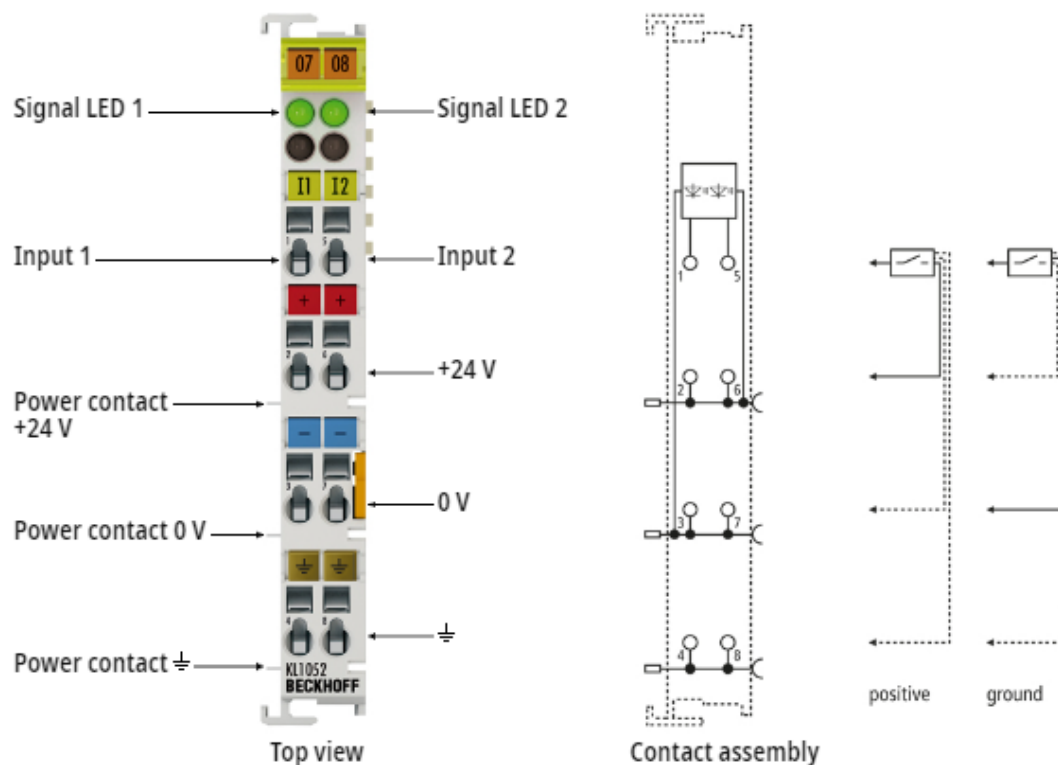


Fig. 5: KL1052

Bus terminal, 2-channel digital input, 24 V_{DC}, 3 ms, positive/ground switching

The KL1052 digital input terminal acquires binary control signals (24 V_{DC}) from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains two channels that indicate its signal state by means of light emitting diodes.

2.2.1 KL1052 - Technical data

Technical data	KL1052, KS1052
Connection technology	4-wire
Specification	positive/ground switching
Number of counters	2
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	7.6 V ... 17.4 V
Signal voltage '1'	0 ... 7 V and 18 ... 30 V
Input filter	typ. 3 ms
Input current	typ. 3 mA
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	2 input bits
Configuration	no address or configuration settings required
Dimensions	12 mm x 100 mm x 68 mm
Weight	approx. 50 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.2.2 KL1052 - LEDs and connection

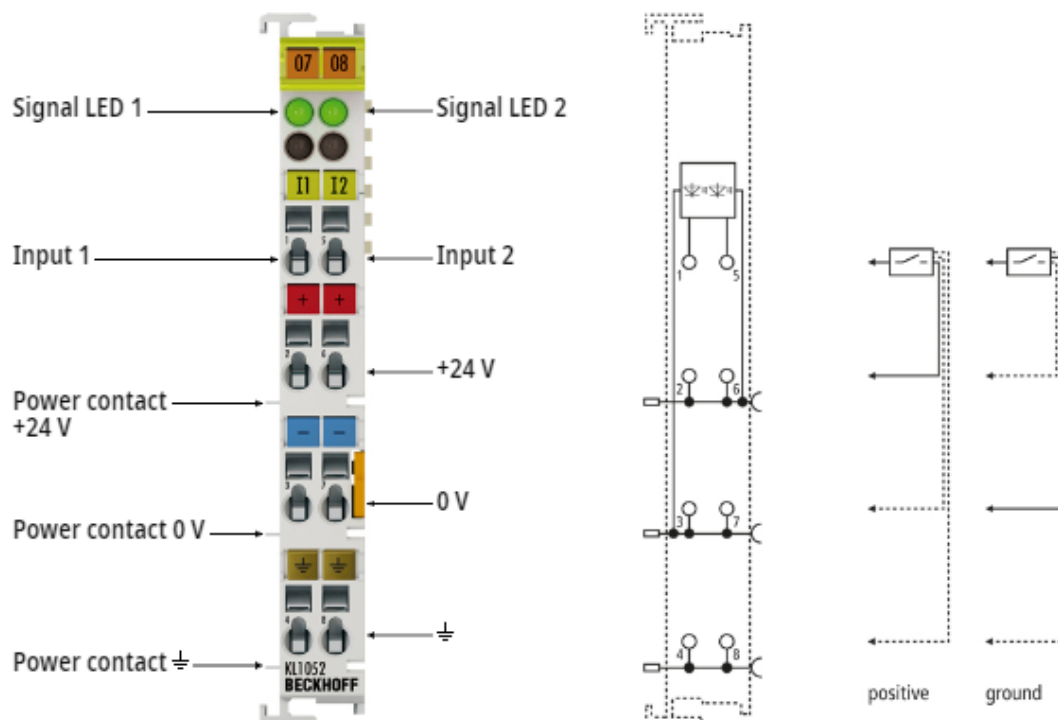


Fig. 6: KL1052 - LEDs and connection

KL1052 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (7.6 V ... 17.4 V)
		on	Signal voltage "1" (0 ... 7 V and 18 ... 30 V)

KL1052 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
⏏	4	⏏ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
⏏	8	⏏ (internally connected to terminal point 4)

2.3 KL1104, KL1114 - Introduction

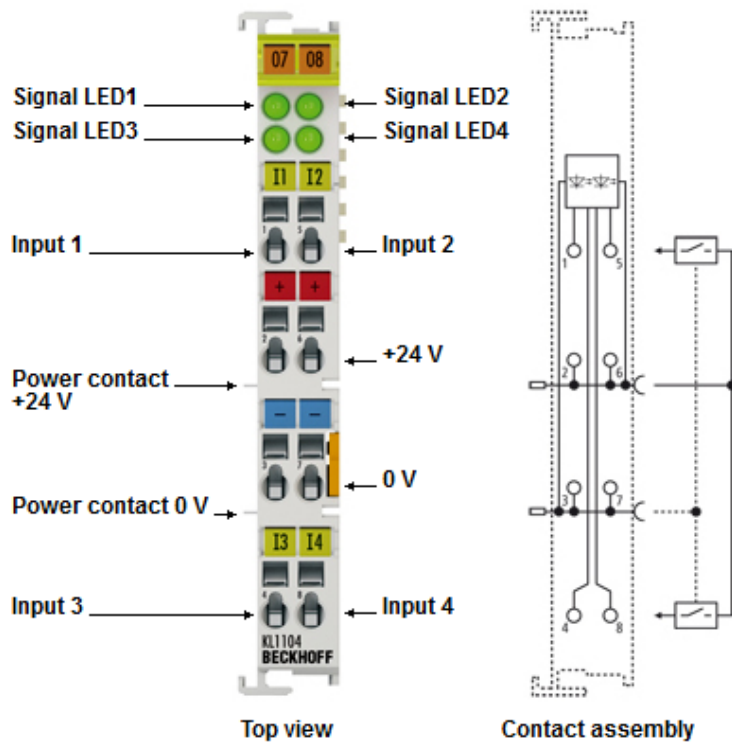


Fig. 7: KL1104

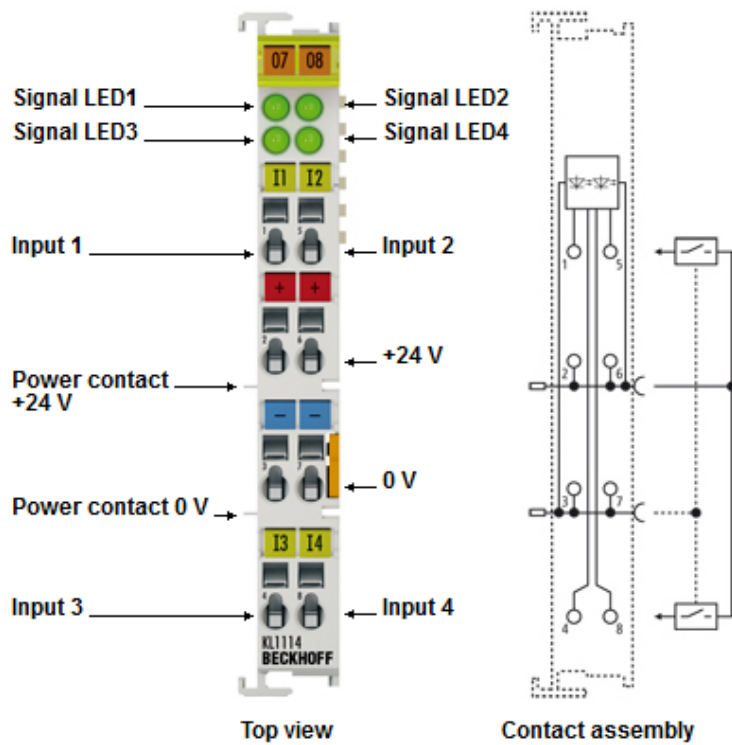


Fig. 8: KL1114

Bus terminal, 4-channel digital input, 24 V_{DC}, 2-/3-wire connection

The KL1104 and KL1114 digital input terminals acquire the binary control signals from the process level and transmit them, in an electrically isolated form, to the higher-level automation device. The KL1104 and KL1114 versions have input filters of different speeds. The bus terminals contain four channels that indicate their signal state by means of light emitting diodes.

2.3.1 KL1104, KL1114 - Technical data

Technical data	KL1104, KS1104	KL1114, KS1114
Connection technology	2-/3-wire	
Specification	EN 61131-2, type 1	
Number of inputs	4	
Nominal voltage	24 V _{DC} (-15 %/+20 %)	
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1)	
Signal voltage '1'	15 V ... 30 V (EN 61131-2, type 1)	
Input filter	typ. 3 ms	typ. 0.2 ms
Input current	typ. 5 mA (EN 61131-2) type 1	
Current consumption from K-bus	typ. 5 mA	
Electrical isolation	500 V (K-bus / field voltage)	
Bit width in process image	4 input bits	
Configuration	no address or configuration settings required	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Weight	approx. 55 g	
Permissible ambient temperature during operation	-25 °C ... +60 °C	
Permissible ambient temperature during storage	-40 °C ... +85 °C	
Permissible relative humidity	95%, no condensation	
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity	
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27	
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4	
Installation position	variable	
Pluggable wiring	for all KSxxxx terminals	
Protection rating	IP20	
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.3.2 KL1104, KL1114 - LEDs and connection

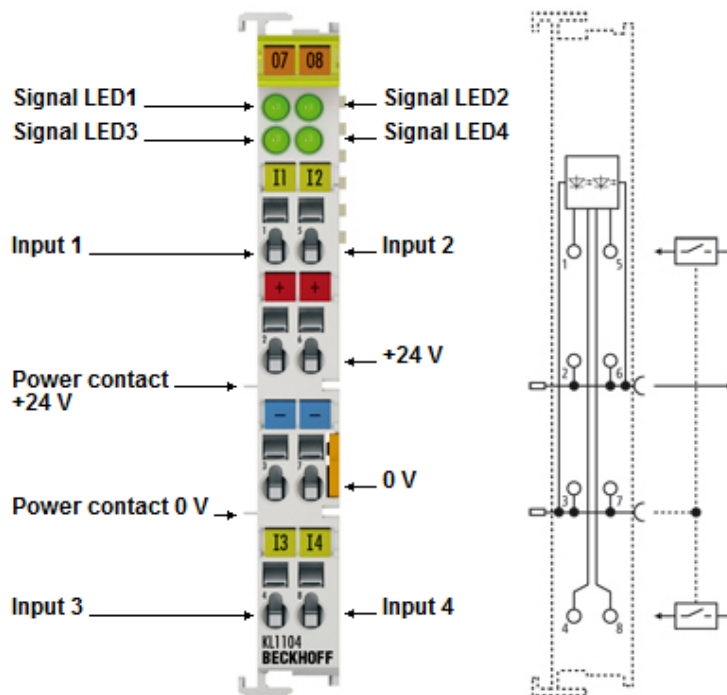


Fig. 9: KL1104 - LEDs and connection

KL1104, KL1114 - LEDs

LED	Color	Meaning
Signal LEDs 1 - 4	green	off
		on

KL1104, KL1114 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor supply +24 V (internally connected to terminal point 6 and positive power contact)
0 V	3	Sensor supply 0 V (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor supply +24 V (internally connected to terminal point 2 and positive power contact)
0 V	7	Sensor supply 0 V (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.4 KL1154 - Introduction

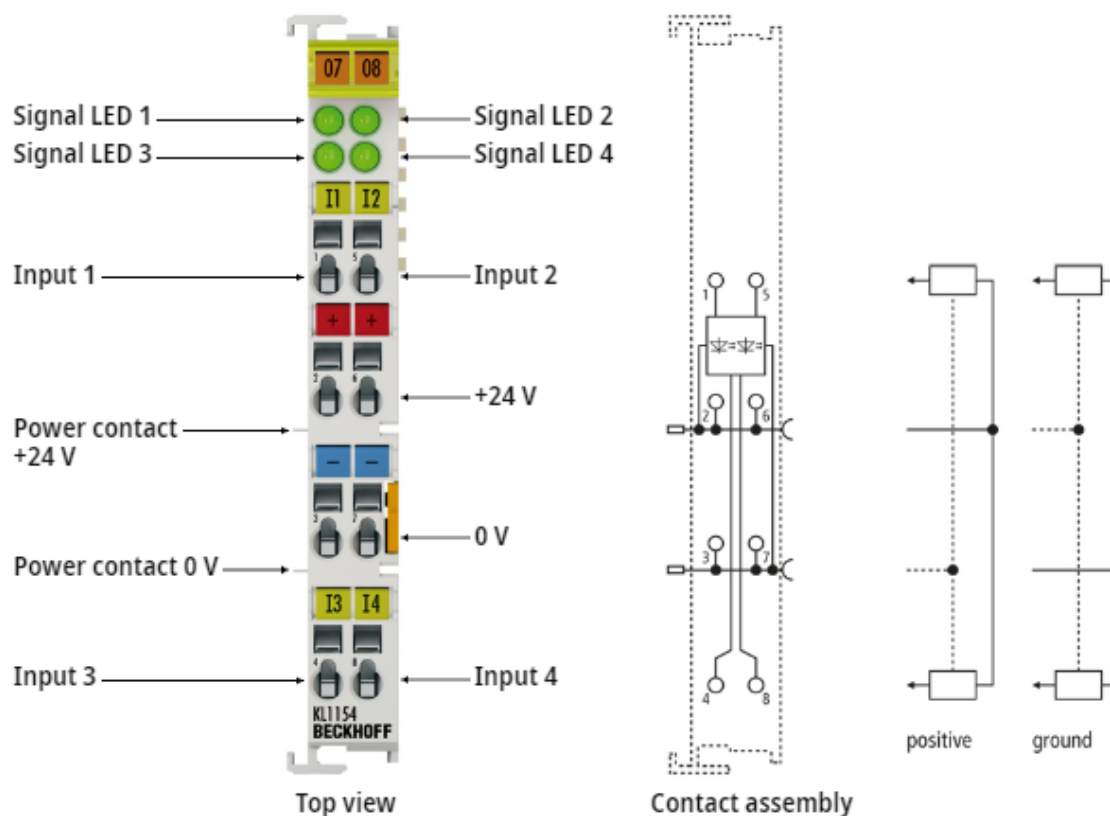


Fig. 10: KL1154

Bus terminal, 4-channel digital input 24 V_{DC}, 3 ms, positive/ground switching

The KL1154 digital input terminal acquires the binary control signals (24 V_{DC}) from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains four channels that indicate its signal state by means of light emitting diodes.

2.4.1 KL1154 - Technical data

Technical data	KL1154, KS1154
Connection technology	2-/3-wire
Specification	ground switching
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	7.6 V ... 17.4 V
Signal voltage '1'	0...7 V and 18...30 V
Input filter	typ. 3 ms
Input current	typ. 5 mA
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 input bits
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	-0°C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 23]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.4.2 KL1154 - LEDs and connection

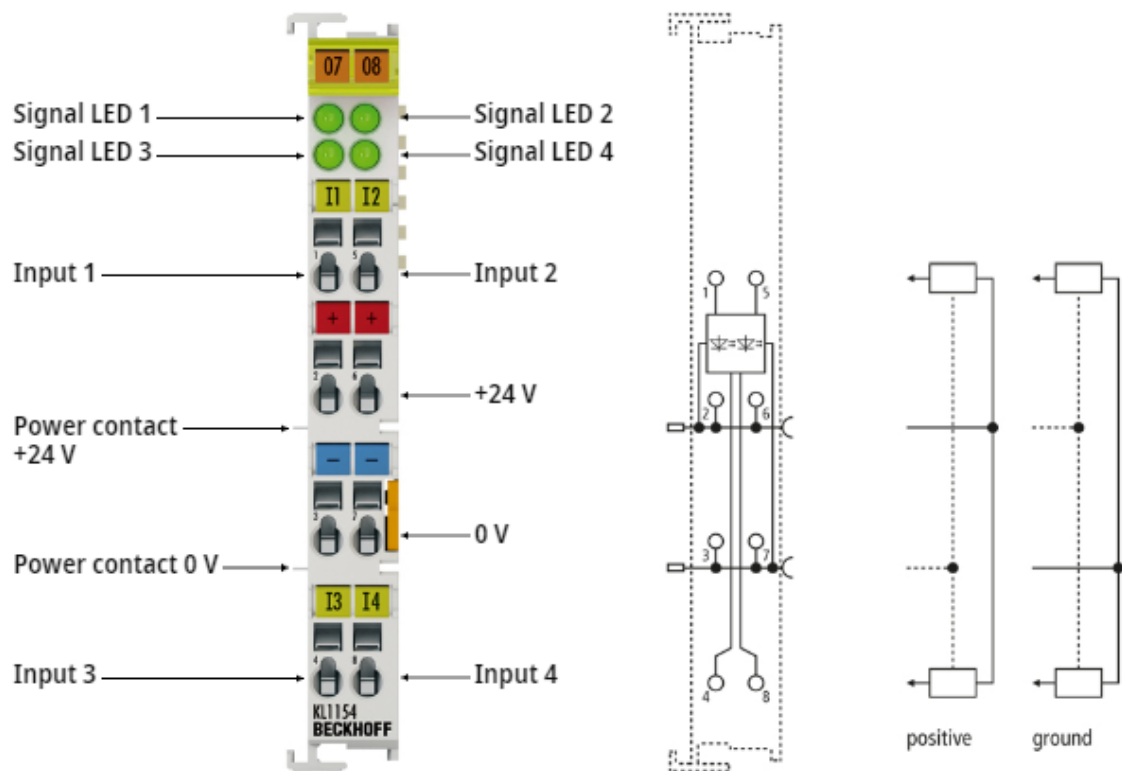


Fig. 11: KL1154 - LEDs and connection

KL1154 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (7.6 V ... 17.4 V)
		on	Signal voltage "1" (0 V ... 7 V and 18 V ... 30 V)

KL1154 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.5 KL1164 - Introduction

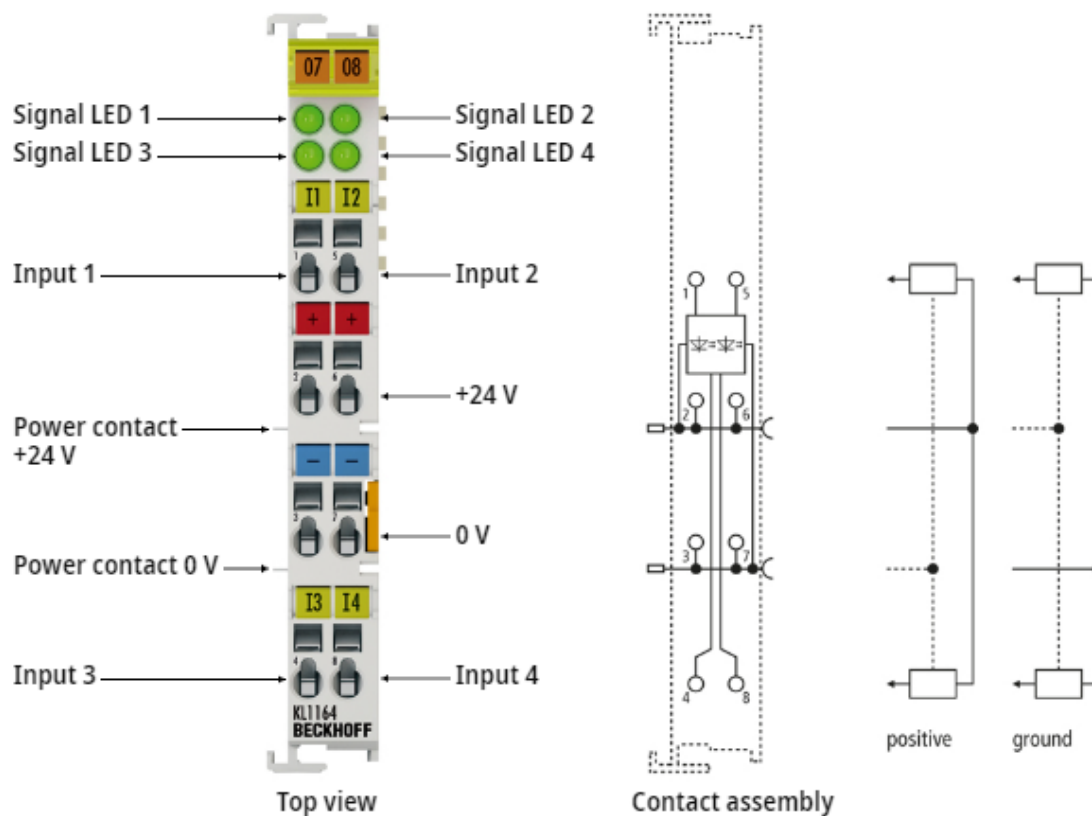


Fig. 12: KL1164

Bus terminal, 4-channel digital input 24 V_{DC}, 0.2 ms, positive/ground switching

The KL1164 digital input terminal acquires the binary control signals (24 V_{DC}) from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains four channels that indicate its signal state by means of light emitting diodes.

2.5.1 KL1164 - Technical data

Technical data	KL1164, KS1164
Connection technology	2-/3-wire
Specification	ground switching
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	7.6 V ... 17.4 V
Signal voltage '1'	0...7 V and 18...30 V
Input filter	typ. 0.2 ms
Input current	typ. 5 mA
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 input bits
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.5.2 KL1164 - LEDs and connection

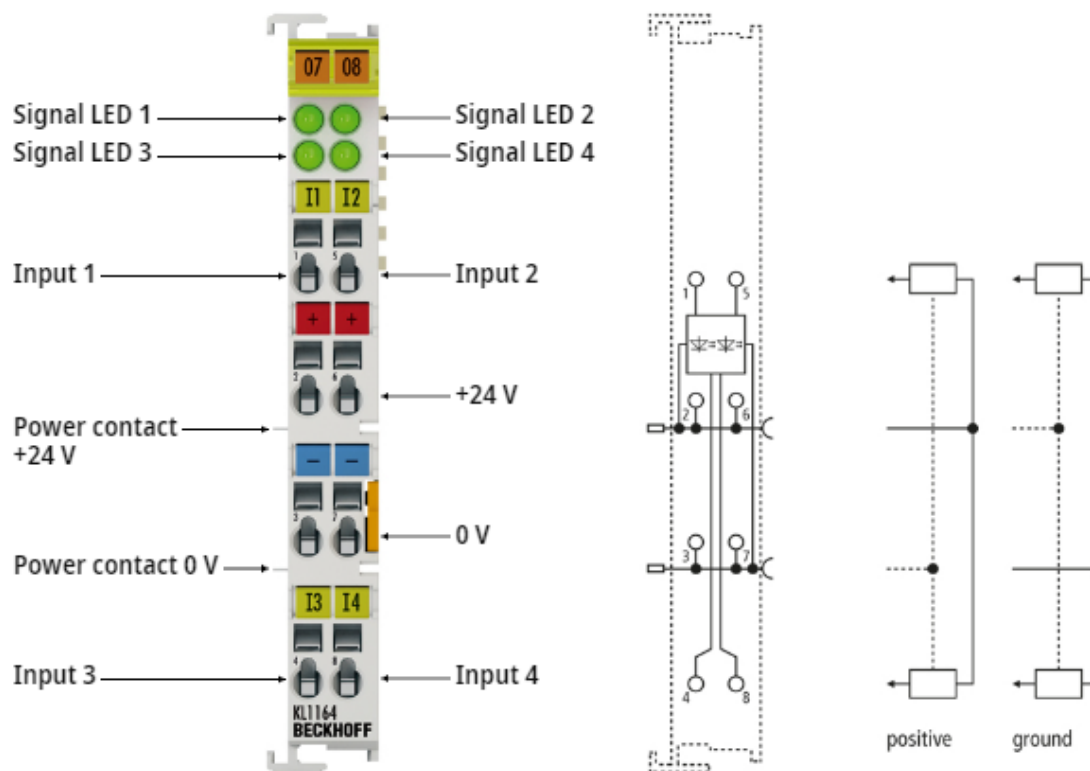


Fig. 13: KL1164 - LEDs and connection

KL1164 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (7.6 V ... 17.4 V)
		on	Signal voltage "1" (0 V ... 7 V and 18 V ... 30 V)

KL1164 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.6 KL1184 - Introduction

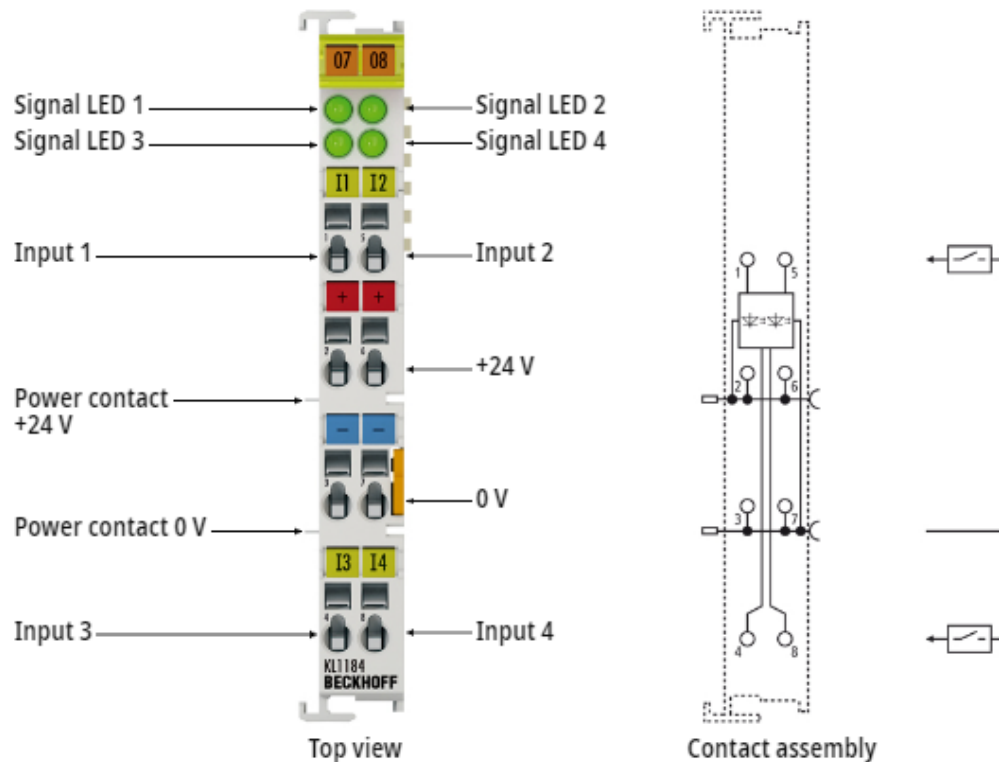


Fig. 14: KL1184

Bus terminal, 4-channel digital input, 24 V_{DC}, 3 ms, ground switching

The KL1184 digital input terminal acquires the binary control signals (24 V_{DC}) from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains four channels that indicate its signal state by means of light emitting diodes.

2.6.1 KL1184 - Technical data

Technical data	KL1184, KS1184
Connection technology	2-/3-wire
Specification	ground switching
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	18 V ... 30 V
Signal voltage '1'	0...7 V
Input filter	typ. 3 ms
Input current	typ. 5 mA
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 input bits
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.6.2 KL1184 - LEDs and connection

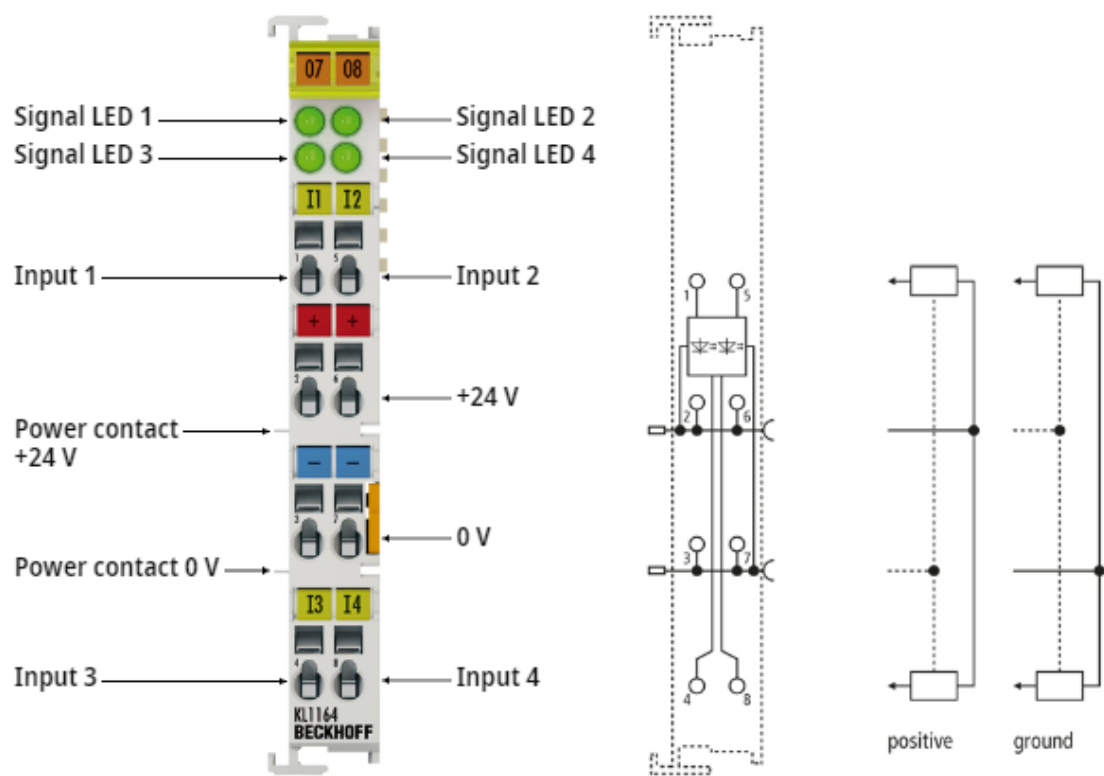


Fig. 15: KL1184 - LEDs and connection

KL1184 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (0 V ... 7 V)
		on	Signal voltage "1" (18 V ... 30 V)

KL1184 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.7 KL1194 - Introduction

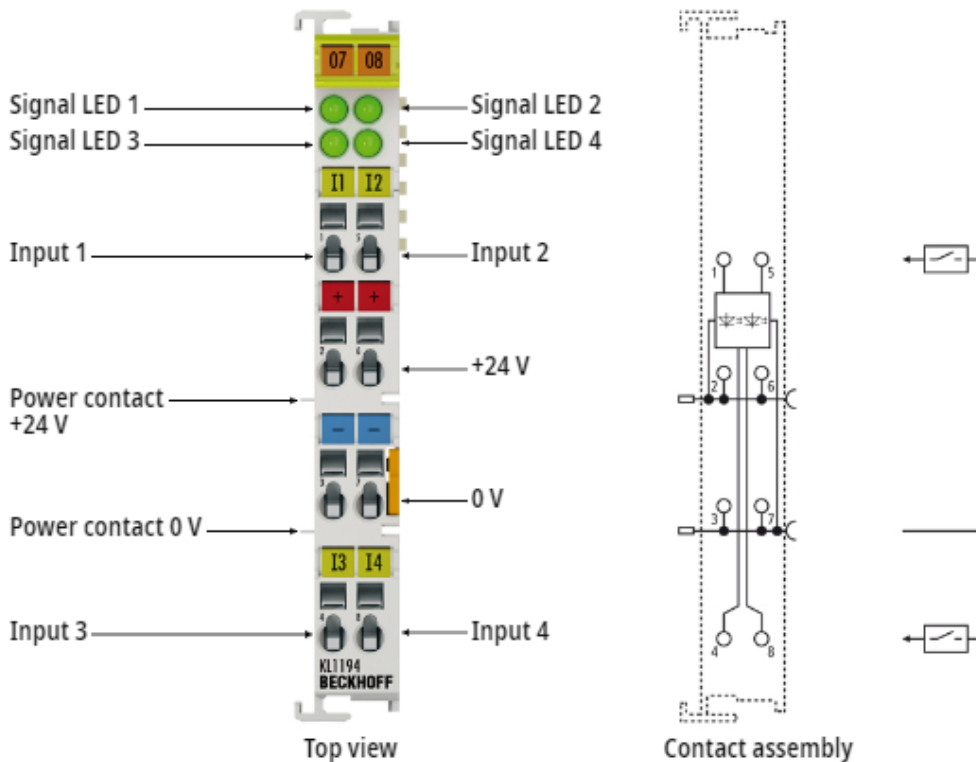


Fig. 16: KL1194

Bus terminal, 4-channel digital input, 24 V_{DC}, 0.2 ms, ground switching

The KL1194 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains four channels that indicate its signal state by means of light emitting diodes.

2.7.1 KL1194 - Technical data

Technical data	KL1194, KS1194
Connection technology	2-/3-wire
Specification	ground switching
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	18 V ... 30 V
Signal voltage '1'	0...7 V
Input filter	typ. 0.2 ms
Input current	typ. 5 mA
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 input bits
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.7.2 KL1194 - LEDs and connection

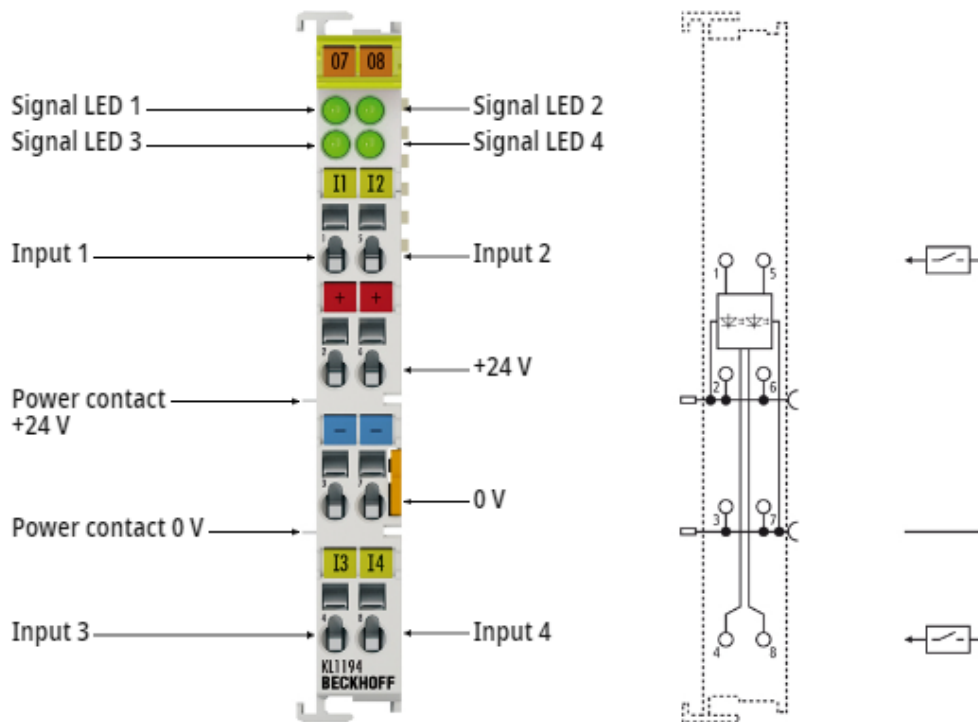


Fig. 17: KL1194 - LEDs and connection

KL1194 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (0 V ... 7 V)
		on	Signal voltage "1" (18 V ... 30 V)

KL1194 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.8 KL1212 - Introduction

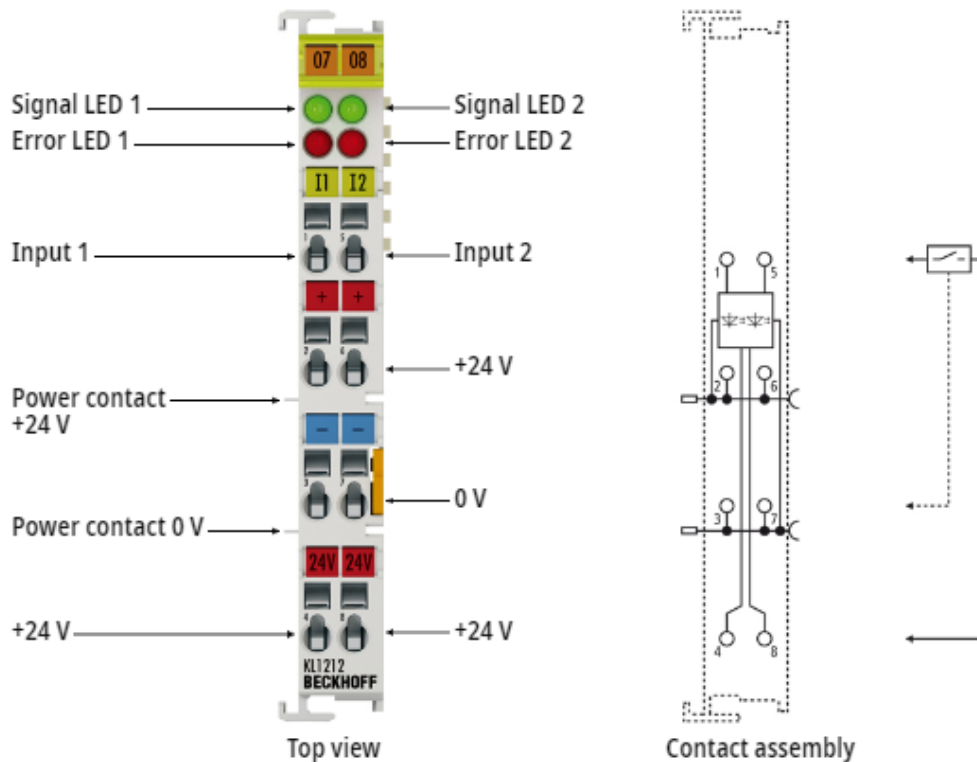


Fig. 18: KL1212

Bus terminal, 2-channel digital input, 24 V_{DC}, 3 ms, with diagnostics

The KL1212 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains two channels whose signal states or errors are indicated by LEDs. The KL1212 generates a short-circuit proof 24 V_{DC} supply voltage for sensors. A short circuit or a wire break in the sensor power supply is detected, and the terminal status is relayed to the controller via the K-bus.

2.8.1 KL1212 - Technical data

Technical data	KL1212, KS1212
Connection technology	3-wire
Specification	EN 61131-2, type 1
Number of counters	2
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 ... +5 V (EN61131-2, type 1)
Signal voltage '1'	15 ... 30 V (EN61131-2, type 1)
Input filter	typ. 3 ms
Input current	typ. 5 mA (EN61131-2, type 1)
Sensor power supply max.	0.5 A (short-circuit proof)
Current consumption from K-bus	typ. 8 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	Input/Output: 4 inputs (2 error bits/2 signal bits); 2 outputs (2 sensor power supplies)
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 93] , IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.8.2 KL1212 - LEDs and connection

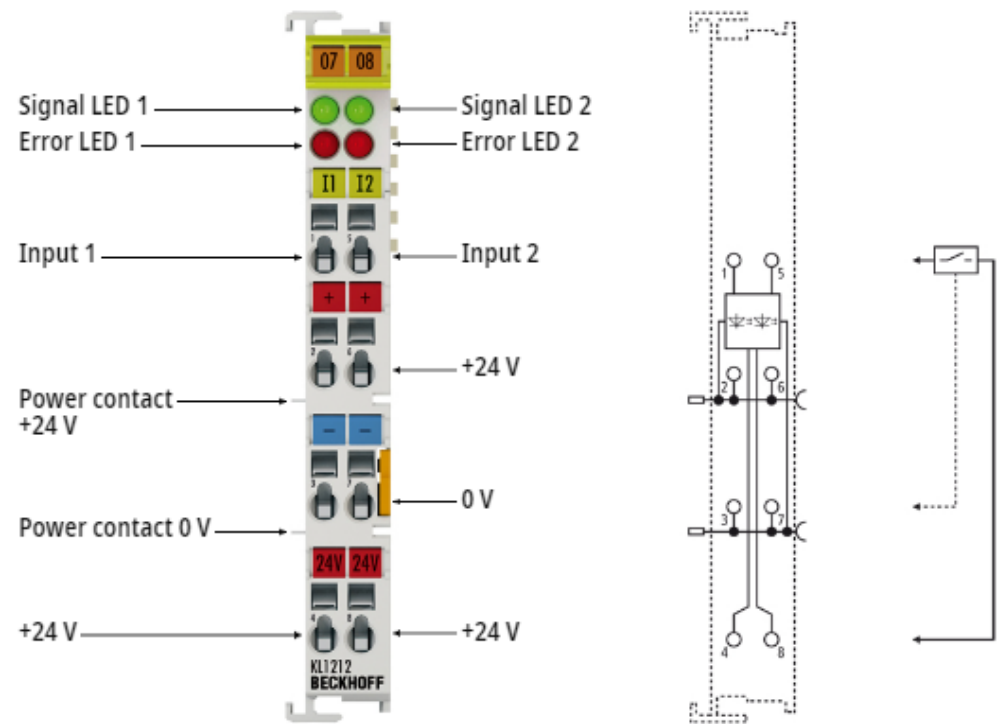


Fig. 19: KL1212 - LEDs and connection

KL1212 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (15 V ... 30 V)

KL1212 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	+24 V (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
+24 V	4	short-circuit proof sensor power supply for input 1
Input 2	5	Input 2
+24 V	6	+24 V (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
+24 V	8	short-circuit proof sensor power supply for input 2

2.9 KL1302 - Introduction

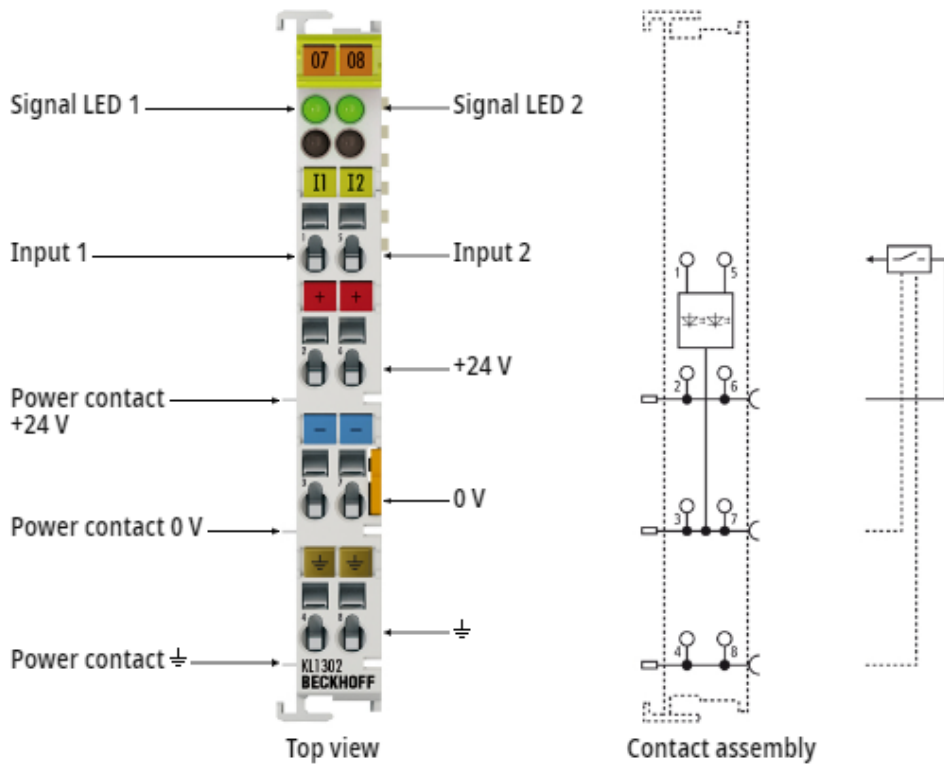


Fig. 20: KL1302

Bus terminal, 2-channel digital input, 24 V_{DC}, 3 ms, type 2

The KL1302 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal has two channels, whose signal state is displayed by light emitting diodes.

2.9.1 KL1302 - Technical data

Technical data	KL1302, KS1302
Connection technology	4-wire
Specification	EN 61131-2, type 2
Number of counters	2
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3...+5 V (EN 61131-2, type 2)
Signal voltage '1'	11...30 V (EN 61131-2, type 2)
Input filter	typ. 3 ms
Input current	typ. 6 mA (EN 61131-2, type 2)
Current consumption from K-bus	typ. 3 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	2 Inputs
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.9.2 KL1302 - LEDs and connection

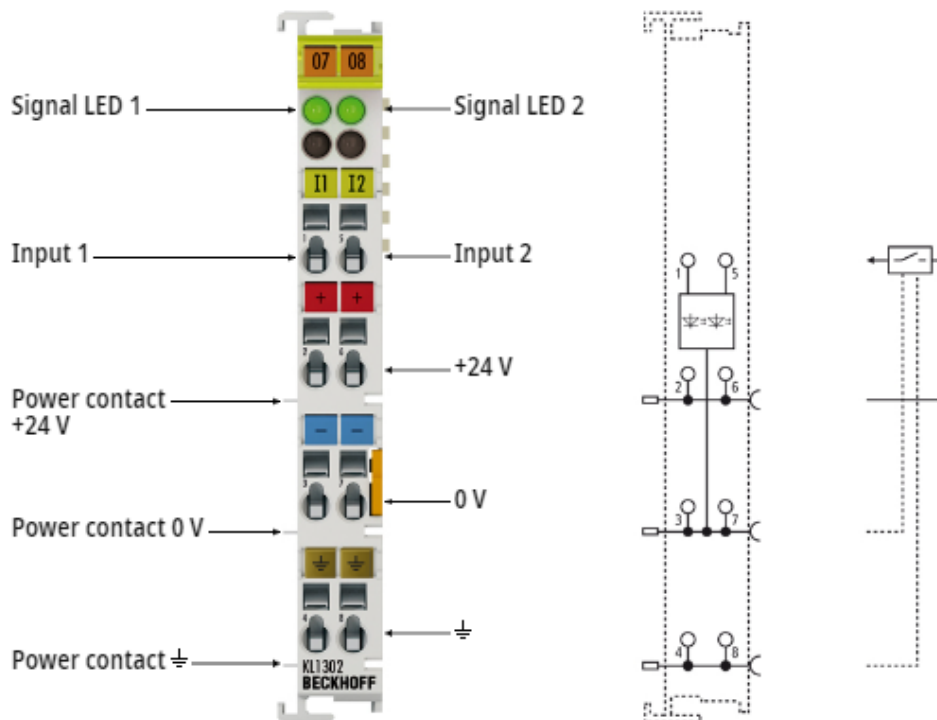


Fig. 21: KL1302 - LEDs and connection

KL1302 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1302 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
⏏	4	⏏ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
⏏	8	⏏ (internally connected to terminal point 4)

2.10 KL1304 - Introduction

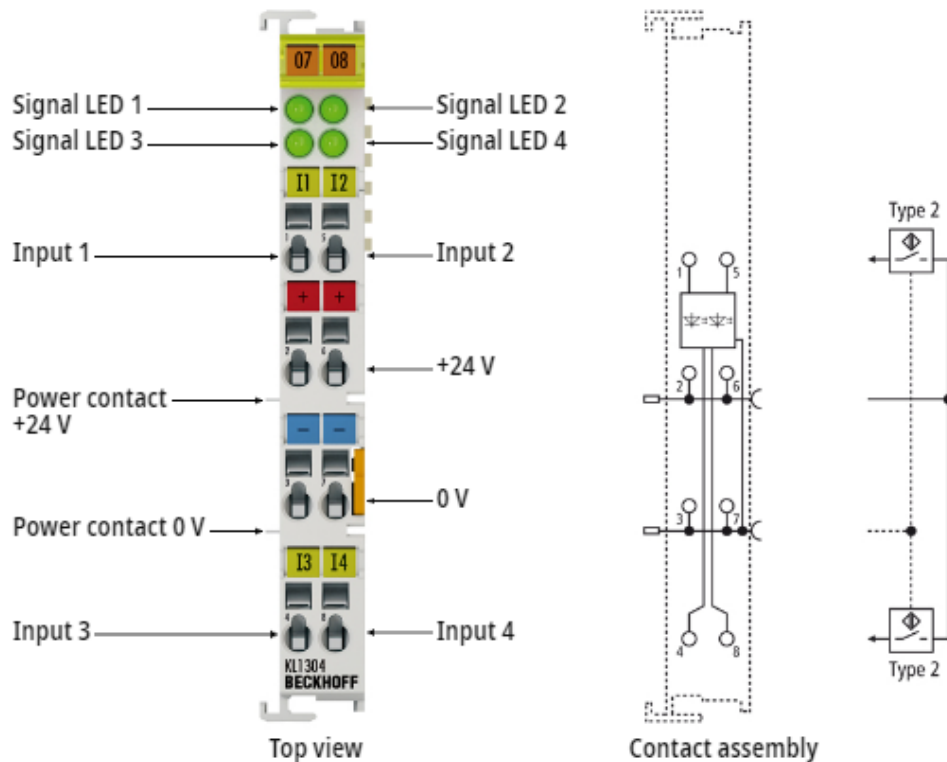


Fig. 22: KL1304

Bus terminal, 4-channel digital input, 24 V_{DC}, 3 ms, type 2

The KL1304 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal has four channels, whose signal state is displayed by light emitting diodes.

2.10.1 KL1304 - Technical data

Technical data	KL1304, KS1304
Connection technology	2-/3-wire
Specification	EN 61131-2, type 2
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3...+5 V (EN 61131-2, type 2)
Signal voltage '1'	11...30 V (EN 61131-2, type 2)
Input filter	typ. 3 ms
Input current	typ. 6 mA (EN 61131-2, type 2)
Current consumption from K-bus	typ. 3 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 Inputs
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 50 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.10.2 KL1304 - LEDs and connection

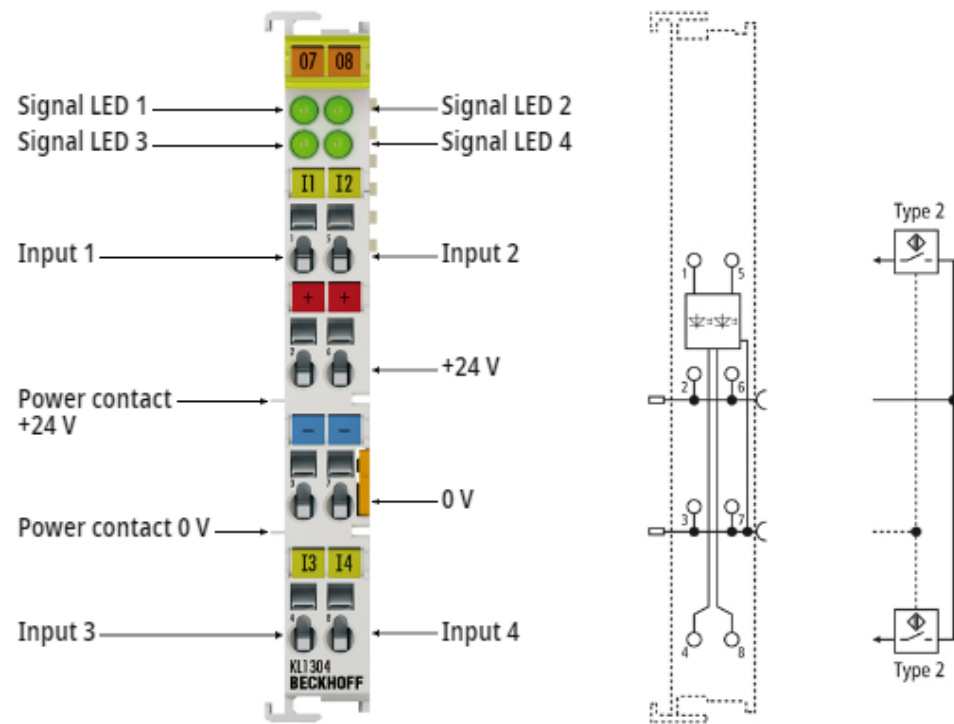


Fig. 23: KL1304 - LEDs and connection

KL1304 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 4	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1304 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.11 KL1312 - Introduction

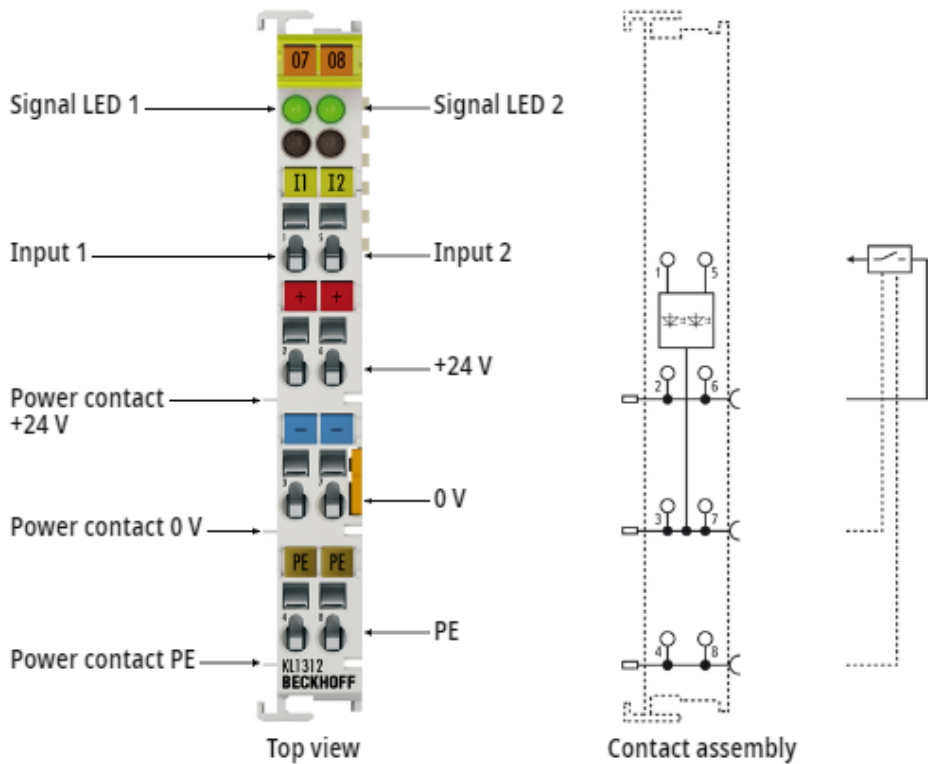


Fig. 24: KL1312

Bus terminal, 2-channel digital input, 24 V_{DC}, 0.2 ms, type 2

The KL1312 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal has two channels, whose signal state is displayed by light emitting diodes.

2.11.1 KL1312 - Technical data

Technical data	KL1312, KS1312
Connection technology	4-wire
Specification	EN 61131-2, type 2
Number of counters	2
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3...+5 V (EN 61131-2, type 2)
Signal voltage '1'	11...30 V (EN 61131-2, type 2)
Input filter	typ. 0.2 ms
Input current	typ. 6 mA (EN 61131-2, type 2)
Current consumption from K-bus	typ. 3 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	2 Inputs
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 50 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.11.2 KL1312 - LEDs and connection

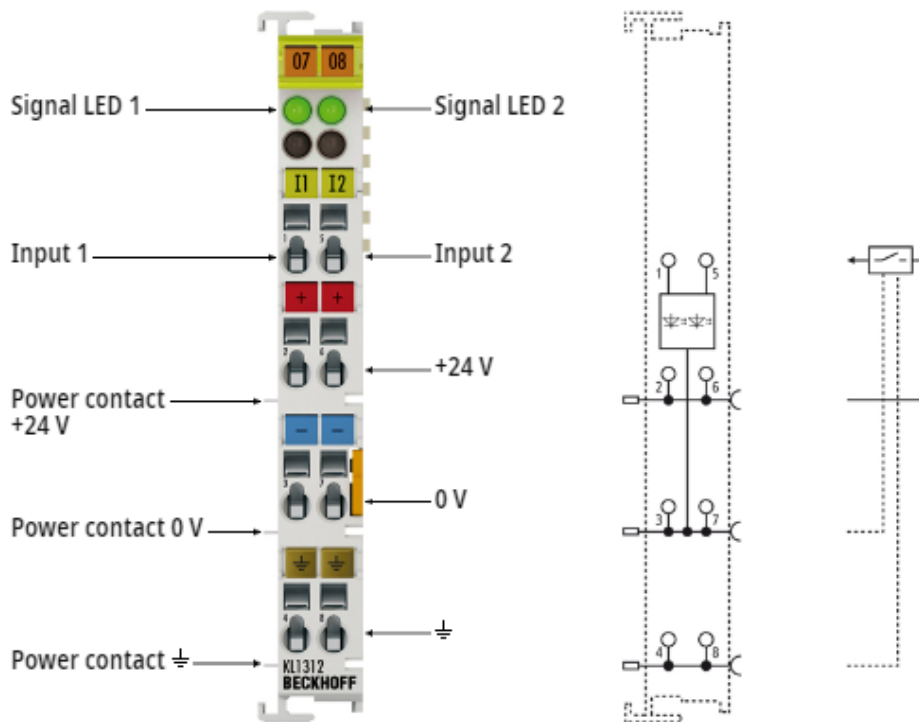


Fig. 25: KL1312 - LEDs and connection

KL1312 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1312 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
⏏	4	⏏ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
⏏	8	⏏ (internally connected to terminal point 4)

2.12 KL1314 - Introduction

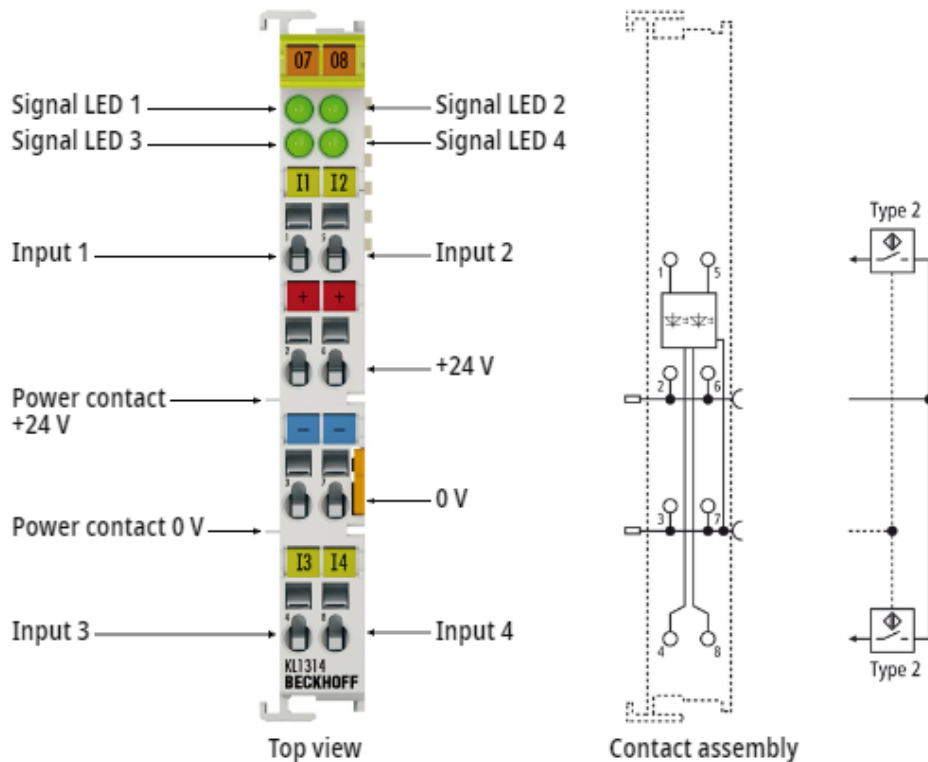


Fig. 26: KL1314

Bus terminal, 4-channel digital input, 24 V_{DC}, 0.2 ms, type 2

The KL1314 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal has four channels, whose signal state is displayed by light emitting diodes.

2.12.1 KL1314 - Technical data

Technical data	KL1314, KS1314
Connection technology	2-/3-wire
Specification	EN 61131-2, type 2
Number of counters	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3...+5 V (EN 61131-2, type 2)
Signal voltage '1'	11...30 V (EN 61131-2, type 2)
Input filter	typ. 0.2 ms
Input current	typ. 6 mA (EN 61131-2, type 2)
Current consumption from K-bus	typ. 3 mA
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 Inputs
Configuration	no address or configuration settings required
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 50 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	Variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.12.2 KL1314 - LEDs and connection

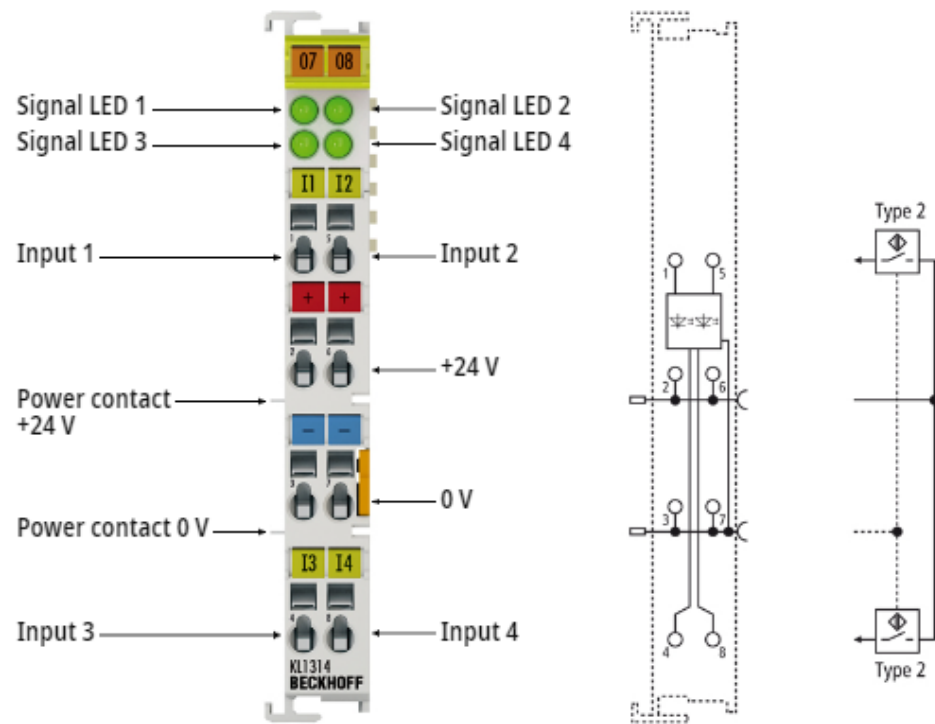


Fig. 27: KL1314 - LEDs and connection

KL1314 - LEDs

LED	Color	Meaning	
Signal LEDs 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1314 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.13 KL1402, KL1412 - Introduction

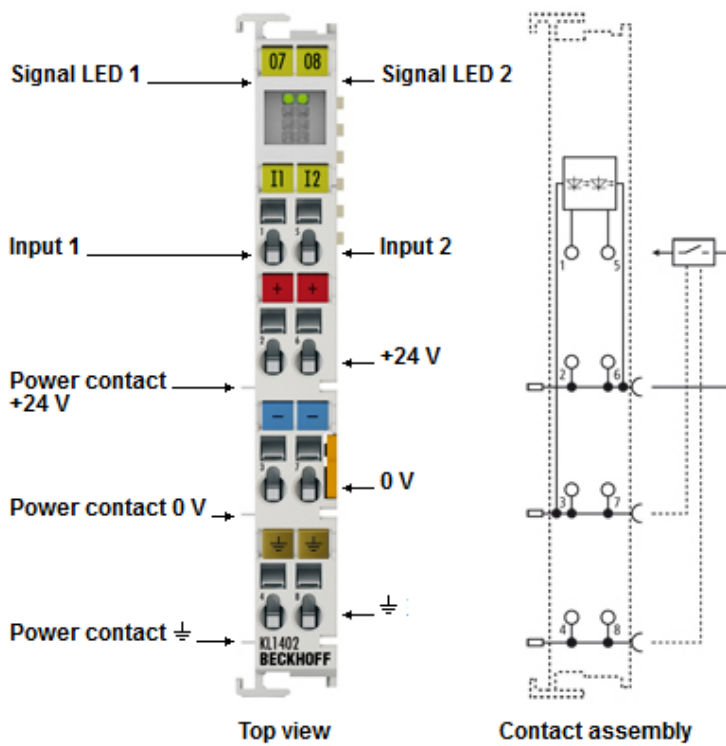


Fig. 28: KL1402

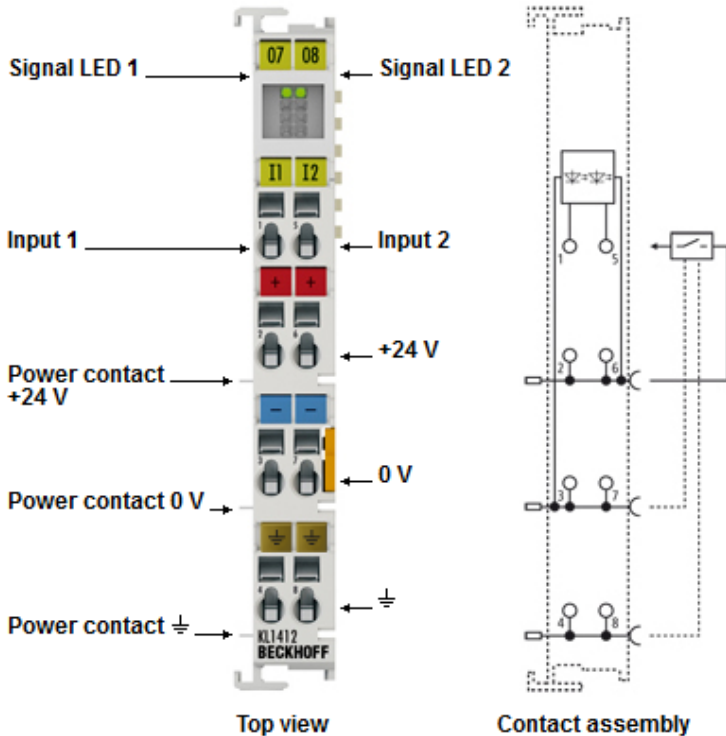


Fig. 29: KL1412

Bus terminal, 2-channel digital input 24 V_{DC}, 2-wire connection

The KL1402 and KL1412 digital input terminals acquire the binary control signals (24 V_{DC}) from the process level and transmit them, in an electrically isolated form, to the higher-level automation device. The bus terminals contain two channels that indicate their signal state by means of light emitting diodes.

2.13.1 KL1402, KL1412 – Technical data

Technical data	KL1402, KS1402	KL1412, KS1412
Connection technology	4-wire	
Specification	EN61131-2, type 1/3	
Number of inputs	2	
Nominal voltage	24 V _{DC} (-15 %/+20 %)	
Signal voltage '0'	-3 V ... +5 V (EN 61131-2, type 1/3)	
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)	
Input current	3 mA typ. (EN61131-2, type 3)	
Input filter	typ. 3.0 ms	typ. 0.2 ms
Current consumption from K-bus	typ. 3 mA	
Current consumption of power contacts	typ. 1 mA + load	
Electrical isolation	500 V (K-bus / field voltage)	
Bit width in process image	2 Inputs	
Configuration	no address or configuration settings required	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Weight	approx. 50 g	
Permissible ambient temperature during operation	0 °C ... +55 °C	
Permissible ambient temperature during storage	-25 °C ... +85 °C	
Permissible relative humidity	95%, no condensation	
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity	
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27	
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4	
Installation position	variable	
Protection rating	IP20	
Pluggable wiring	for all KSxxxx terminals	
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 93], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.13.2 KL1402, KL1412 - LEDs and connection

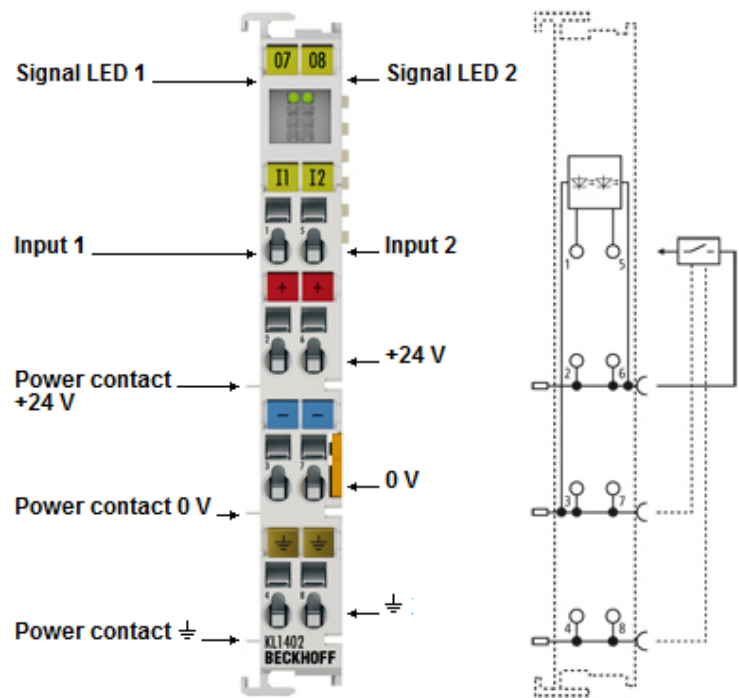


Fig. 30: KL1402 - LEDs and connection

KL1402, KL1412 - LEDs

LED	Color	Meaning	
Signal LED 1 - 2	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1402, KL1412 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor power supply for input 1 (internally connected to terminal point 6 and positive power contact)
0 V	3	Ground for input 1 (internally connected to terminal point 7 and negative power contact)
$\perp$	4	$\perp$ (internally connected to terminal point 8)
Input 2	5	Input 2
+24 V	6	Sensor power supply for input 2 (internally connected to terminal point 2 and positive power contact)
0 V	7	Ground for input 2 (internally connected to terminal point 3 and negative power contact)
$\perp$	8	$\perp$ (internally connected to terminal point 4)

2.14 KL1404, KL1414 - Introduction

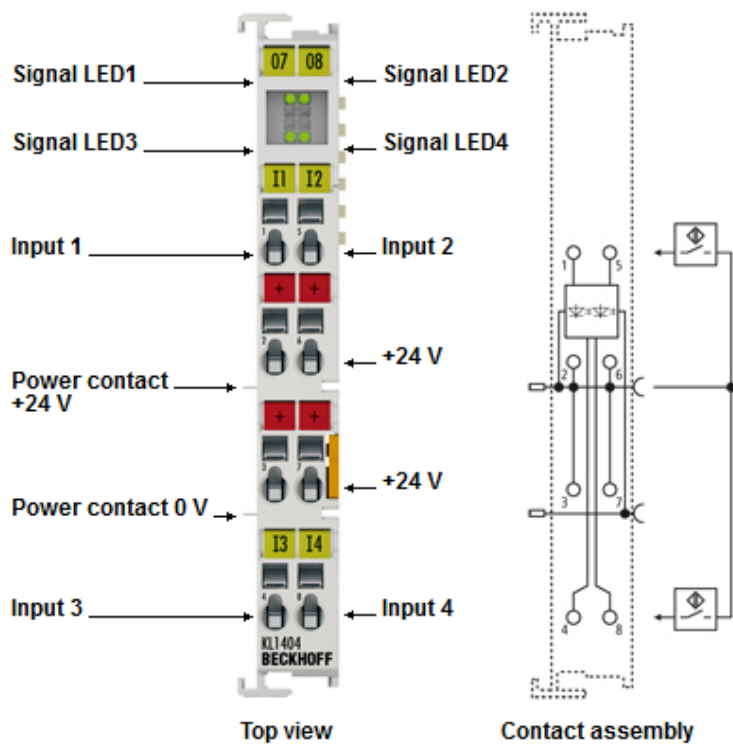


Fig. 31: KL1404

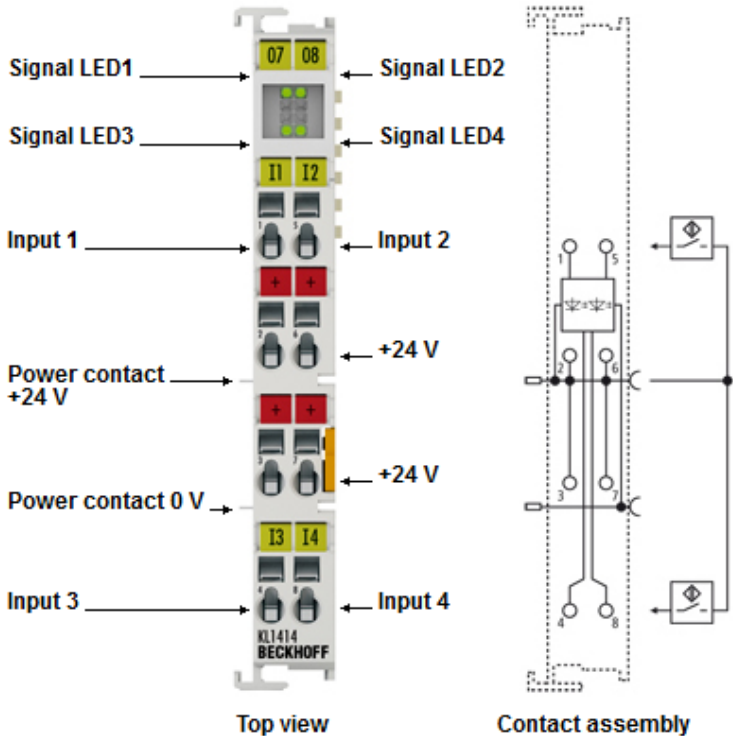


Fig. 32: KL1414

Bus terminal, 4-channel digital input, 24 V_{DC}, 2-wire connection

The KL1404 and KL1414 digital input terminals acquire the binary control signals (24 V_{DC}) and transmit them, in an electrically isolated form, to the higher-level automation system. The bus terminals contain four channels that indicate their signal state by means of light emitting diodes. The KL1404 and KL1414 versions have different input filters. The input signal of KL1404 and KL1414 corresponds to IEC 61131-2, type 1/3. In addition, these bus terminals enable the direct connection of four 2-wire sensors. Four connection points for +24 V are provided.

2.14.1 KL1404, KL1414 - Technical data

Technical data	KL1404, KS1404	KL1414, KS1414
Connection technology	2-wire	
Specification	EN 61131-2, type 1/3	
Number of inputs	4	
Nominal voltage	24 V _{DC} (-15 %/+20 %)	
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)	
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)	
Input filter	typ. 3 ms	typ. 0.2 ms
Input current	typ. 3 mA (EN 61131-2, type 3)	
Current consumption from K-bus	typ. 3 mA	
Current consumption of power contacts	1 mA typ. + load	
Electrical isolation	500 V (K-bus / field voltage)	
Bit width in process image	4 input bits	
Configuration	no address or configuration settings required	
Dimensions (W x H x D)	15 mm x 100 mm x 70 mm (width aligned 12 mm)	
Weight	approx. 50 g	
Permissible ambient temperature during operation	0 °C ... +55 °C	
Permissible ambient temperature during storage	-25 °C ... +85 °C	
Permissible relative humidity	95%, no condensation	
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity	
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27	
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4	
Installation position	variable	
Protection rating	IP20	
Pluggable wiring	for all KSxxxx terminals	
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 93], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.14.2 KL1404, KL1414 - LEDs and connection

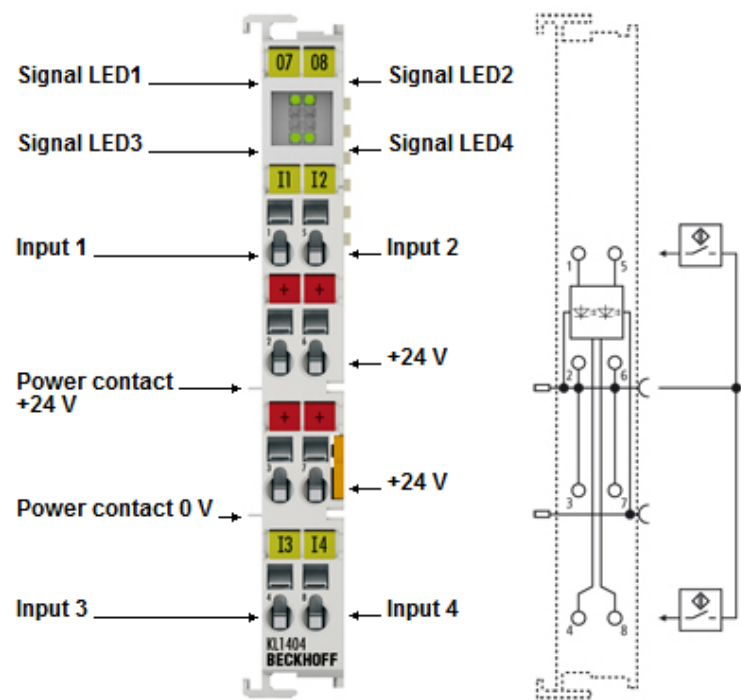


Fig. 33: KL1404 - LEDs and connection

KL1404, KL1414 - LEDs

LED	Color	Meaning	
Signal LED 1 - 4	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1404, KL1414 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	Sensor supply +24 V (internally connected to terminal point 6 and positive power contact)
+24 V	3	Sensor supply +24 V (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor supply +24 V (internally connected to terminal point 2 and positive power contact)
+24 V	7	Sensor supply +24 V (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.15 KL1434 - Introduction

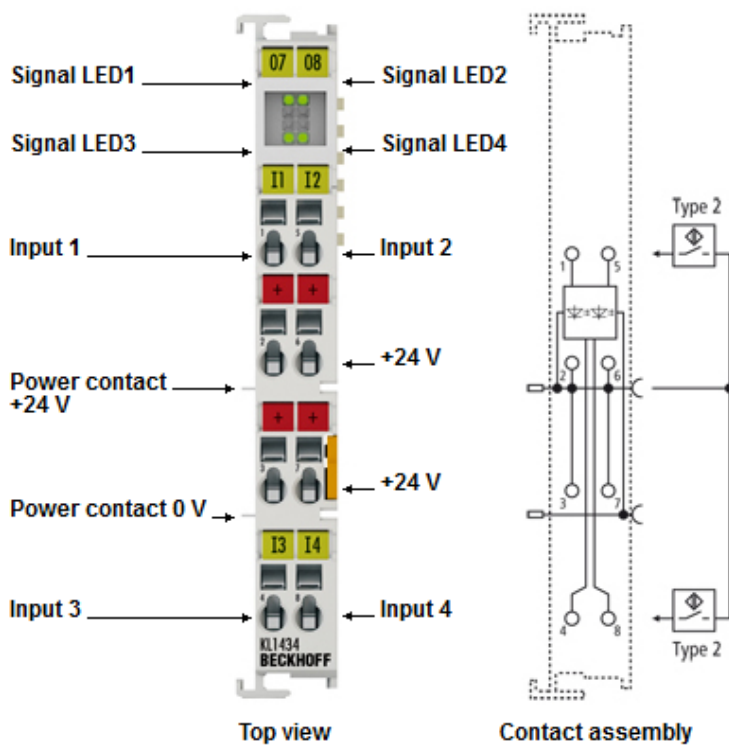


Fig. 34: KL1434

Bus terminal, 4-channel digital input, 24 V_{DC}, 0.2 ms, type 2, 2-wire connection

The KL1434 digital input terminal acquires binary 24 V_{DC} control signals from the process level and transmits them, in an electrically isolated form, to the higher-level automation system. The bus terminal has four channels, whose signal state is displayed by light emitting diodes.

2.15.1 KL1434 - Technical data

Technical data	KL1434, KS1434
Connection technology	2-wire
Specification	EN 61131-2, type 2
Number of inputs	4
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 2)
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 2)
Input filter	typ. 0.2 ms
Input current	typ. 6 mA (EN 61131-2, type 2)
Current consumption from K-bus	typ. 3 mA
Current consumption of power contacts	1 mA typ. + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	4 input bits
Configuration	no address or configuration settings required
Dimensions (W x H x D)	15 mm x 100 mm x 70 mm (width aligned 12 mm)
Weight	approx. 50 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Pluggable wiring	for all KSxxxx terminals
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex marking

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc

2.15.2 KL1434 - LEDs and connection

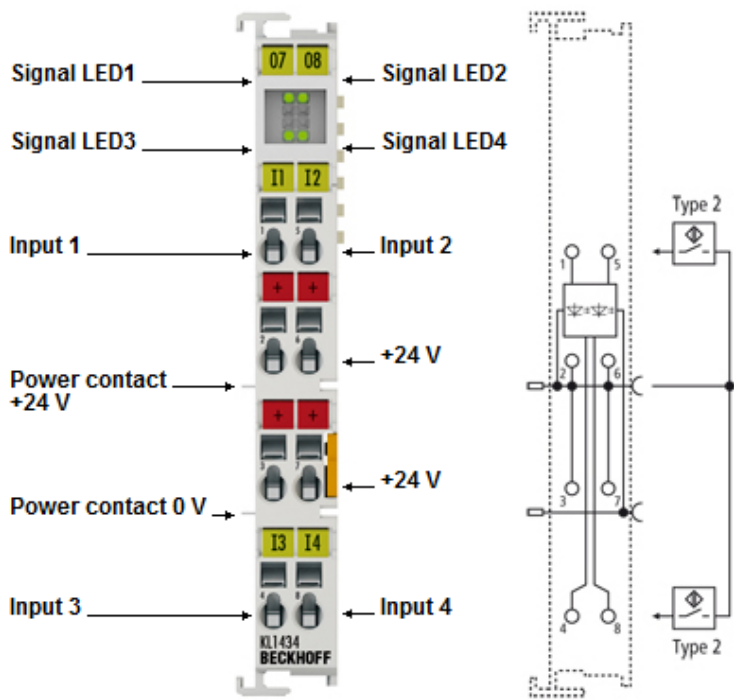


Fig. 35: KL1434 - LEDs and connection

KL1434 - LEDs

LED	Color	Meaning	
Signal LED 1 - 4	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1434 - Connection

Terminal point		Description
Name	No	
Input 1	1	Input 1
+24 V	2	Sensor supply +24 V (internally connected to terminal point 6 and positive power contact)
+24 V	3	Sensor supply +24 V (internally connected to terminal point 7 and negative power contact)
Input 3	4	Input 3
Input 2	5	Input 2
+24 V	6	Sensor supply +24 V (internally connected to terminal point 2 and positive power contact)
+24 V	7	Sensor supply +24 V (internally connected to terminal point 3 and negative power contact)
Input 4	8	Input 4

2.16 KL1408, KL1418, KL1488, KL1498 - introduction

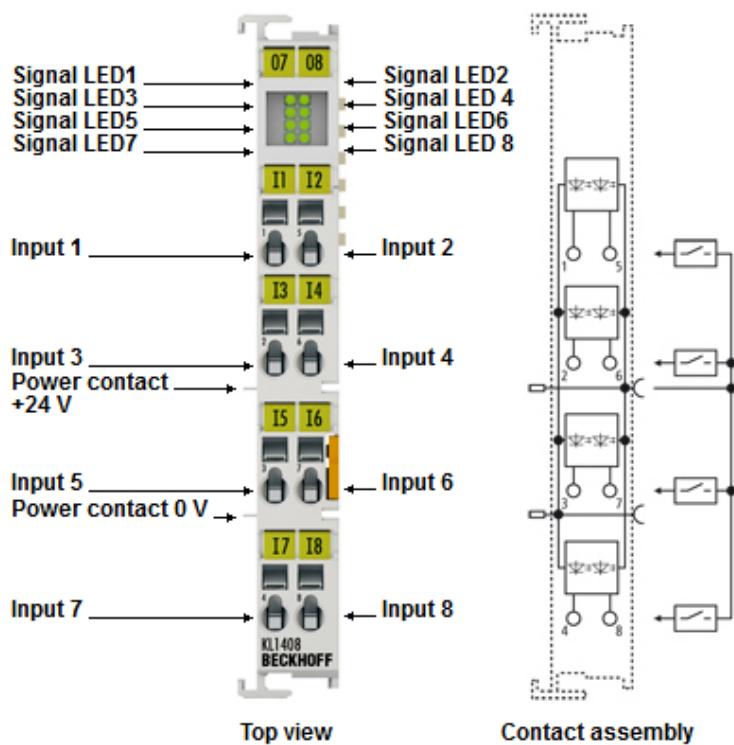


Fig. 36: KL1408

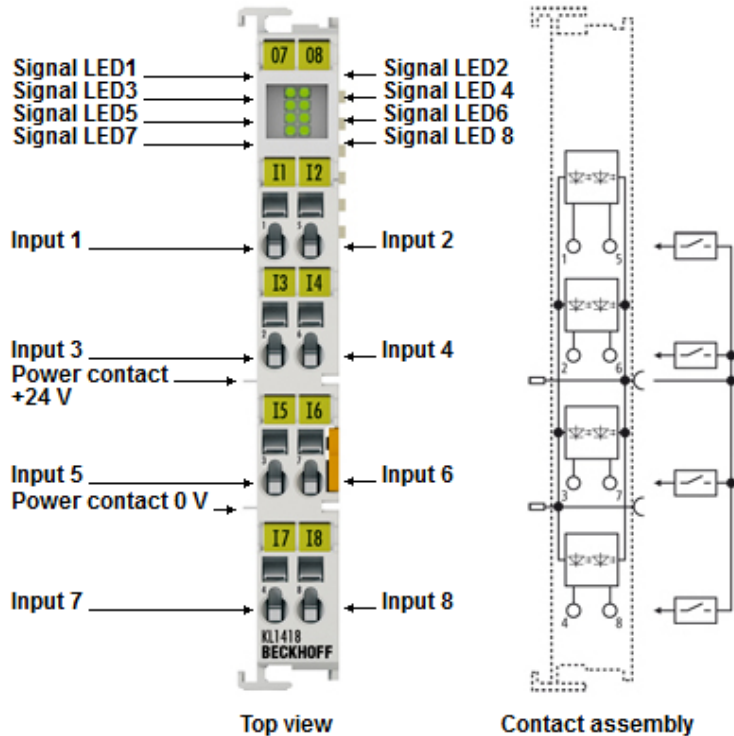


Fig. 37: KL1418

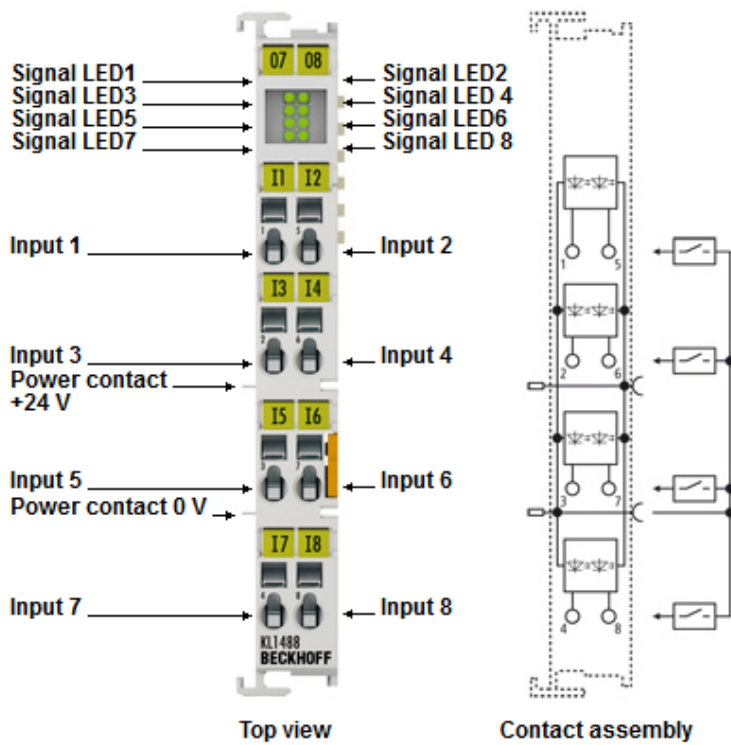


Fig. 38: KL1488

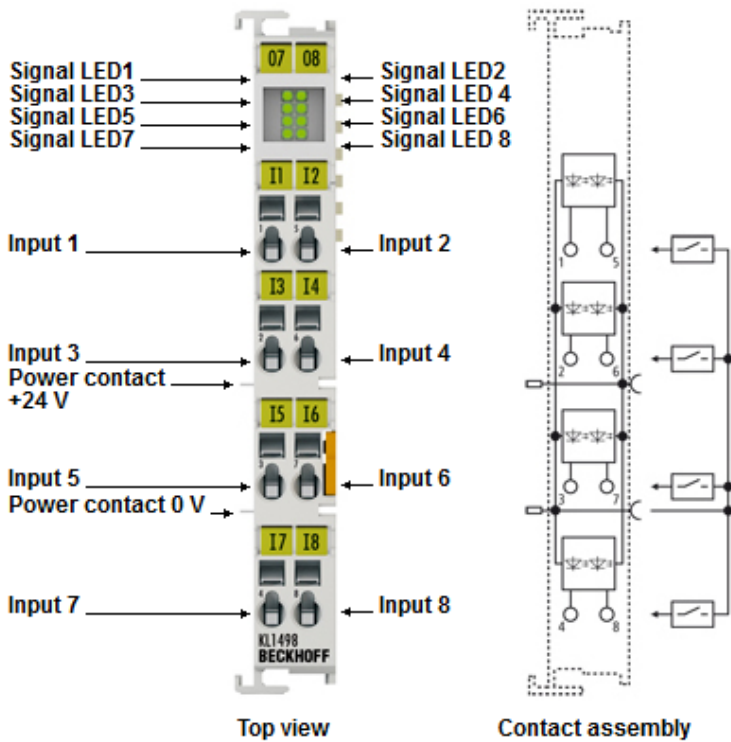


Fig. 39: KL1498

Bus terminal, 8-channel digital input, 24 V_{DC}, 1-wire connection**Bus terminal, 8-channel digital input, 24 V_{DC}, ground switching**

The digital input terminals KL1408 and KL1418 (positive switching) and KL1488 and KL1498 (ground switching) acquire the binary control signals from the process level and transmit them, in an electrically isolated form, to the higher-level automation device. The bus terminals each contain eight channels, whose signal states are displayed by LEDs. By using the single-ended connection technique, a multi-channel sensor can be connected in the smallest space with a minimum amount of wiring. The power contacts are looped through. For the KL1408 and KL1418 Bus Terminals, the reference ground for all inputs is the 0 V power contact. For the KL1488 and KL1498 Bus Terminals, the reference point for all inputs is the 24 V power contact. These versions have input filters with different speeds.

2.16.1 KL1408, KL1418, KL1488, KL1498 - Technical data

Technical data	KL1408, KS1408	KL1418, KS1418	KL1488, KS1488	KL1498, KS1498
Connection technology	1-wire			
Specification	EN61131-2, type 1/3		ground switching	
Number of inputs	8			
Nominal voltage	24 V _{DC} (-15 %/+20 %)			
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)		18 V ... 30 V	
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 1)		0 V ... 7 V	
Input current	typ. 3 mA (EN61131-2, type 3)		typ. 3 mA	
Input filter	typ. 3 ms	typ. 0.2 ms	typ. 3 ms	typ. 0.2 ms
Current consumption from K-bus	typically 5 mA			
Current consumption of power contacts	2 mA typ. + load			
Electrical isolation	500 V (K-bus / field voltage)			
Bit width in process image	8 input bits			
Configuration	no address or configuration settings required			
Dimensions (W x H x D)	15 mm x 100 mm x 70 mm (width aligned 12 mm)			
Weight	approx. 55 g			
Permissible ambient temperature during operation	-25 °C ... +60 °C		0 °C ... +55 °C	
Permissible ambient temperature during storage	-40 °C ... +85 °C		-25 °C ... +85 °C	
Permissible relative humidity	95%, no condensation			
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity			
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27			
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4			
Installation position	variable			
Protection rating	IP20			
Pluggable wiring	for all KSxxxx terminals			
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]		CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.16.2 KL1408, KL1418 - LEDs and connection

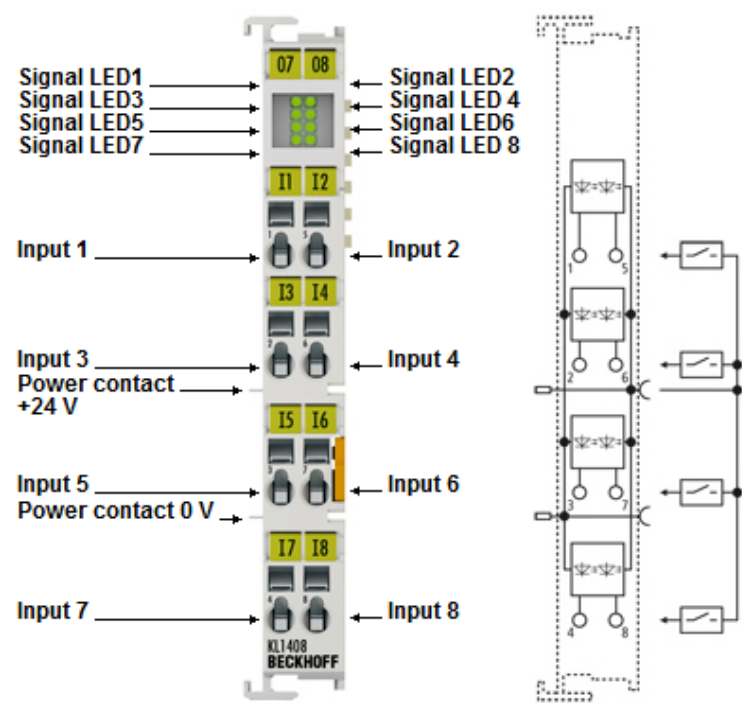


Fig. 40: KL1408 - LEDs and connection

KL1408, KL1418 - LEDs

LED	Color	Meaning	
Signal LED 1 - 8	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1408, KL1418 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 3	2	Input 3
Input 5	3	Input 5
Input 7	4	Input 7
Input 2	5	Input 2
Input 4	6	Input 4
Input 6	7	Input 6
Input 8	8	Input 8

2.16.3 KL1488, KL1498 - LEDs and connection

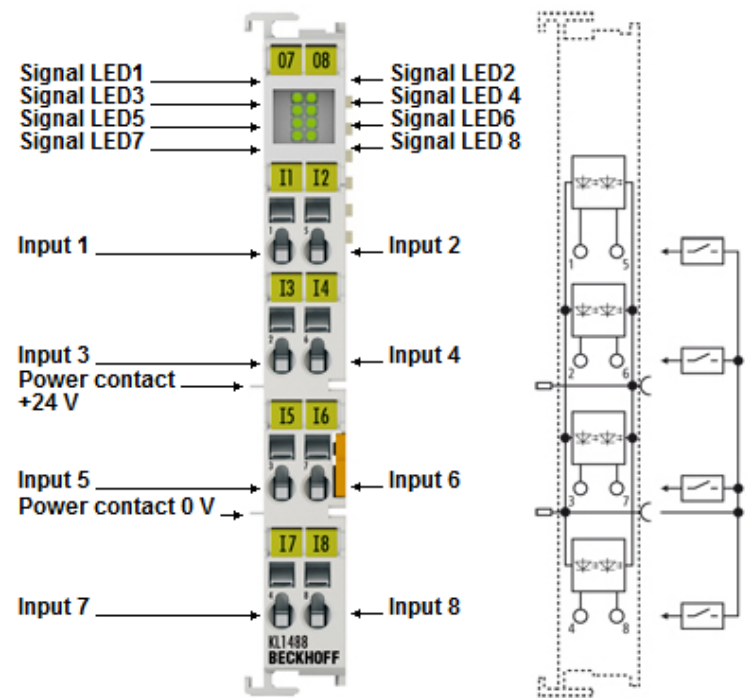


Fig. 41: KL1488 - LEDs and connection

KL1488, KL1498 - LEDs

LED	Color	Meaning	
Signal LED 1 - 8	green	off	Signal voltage "0" (18 V ... 30 V)
		on	Signal voltage "1" (0 V ... 7 V)

KL1488, KL1498 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 3	2	Input 3
Input 5	3	Input 5
Input 7	4	Input 7
Input 2	5	Input 2
Input 4	6	Input 4
Input 6	7	Input 6
Input 8	8	Input 8

2.17 KL1804, KL1814 - Introduction

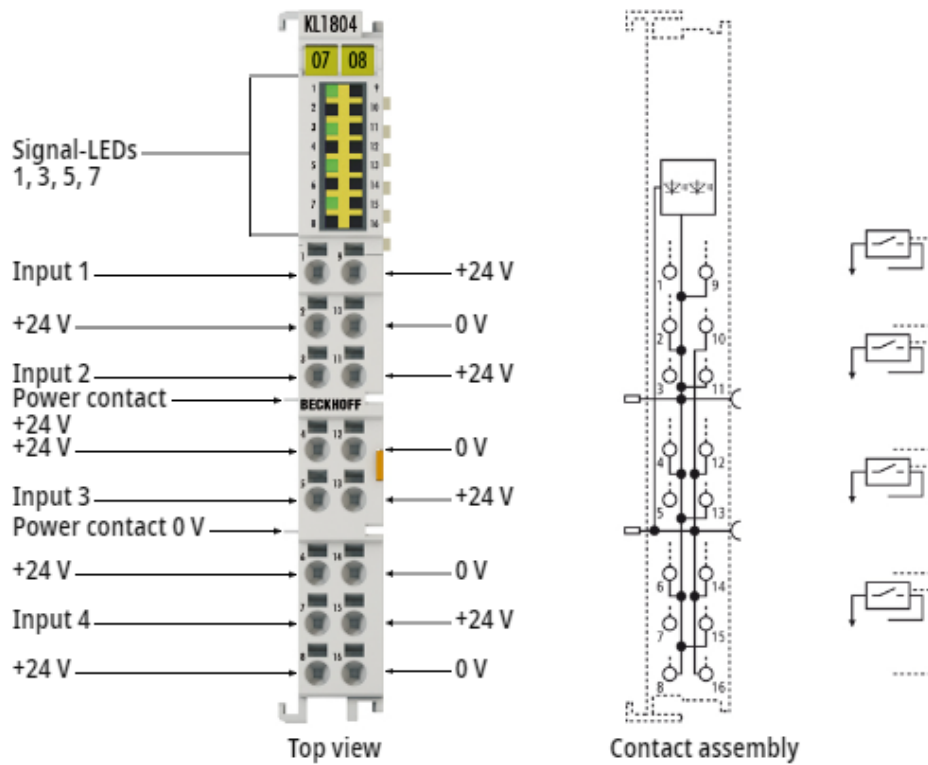


Fig. 42: KL1804

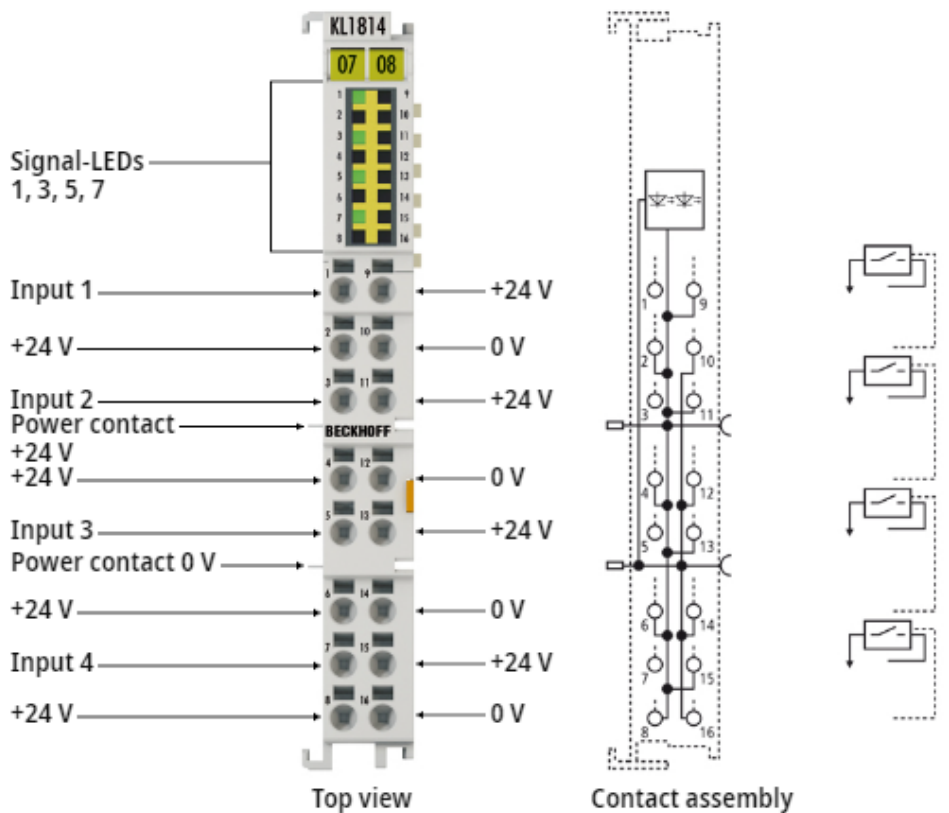


Fig. 43: KL1814

Bus terminal, 4-channel digital input, 24 V_{DC}

The KL1804 and KL1814 digital input terminals acquire the binary 24 V_{DC} control signals from the process level and transmit them, in an electrically isolated form, to the higher-level automation device. The bus terminals each contain four channels, whose signal states are displayed by LEDs. The power contacts are looped through. For the KL1804 and KL1814 Bus Terminals, the reference ground for all inputs is the 0 V power contact.

2.17.1 KL1804, KL1814 – Technical data

Technical data	KL1804	KL1814
Connection technology	3-wire	
Specification	EN 61131-2, type 1/3	
Number of inputs	4	
Nominal voltage	24 V _{DC} (-15 %/+20 %)	
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)	
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)	
Input filter	typ. 3 ms	typ. 0.2 ms
Input current	typ. 3 mA (EN61131-2, type 3)	
Current consumption from K-bus	typ. 10 mA	
Current consumption of power contacts	typ. 1 mA + load	
Electrical isolation	500 V (K-bus / field voltage)	
Bit width in process image	4 input bits	
Configuration	no address or configuration settings required	
Conductor types	solid wire, stranded wire and ferrule	
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver	
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; with ferrule: 0.14...0.75 mm ²	
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm	
Weight	approx. 60 g	
Permissible ambient temperature during operation	0 °C ... +55 °C	
Permissible ambient temperature during storage	-25 °C ... +85 °C	
Permissible relative humidity	95%, no condensation	
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity	
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27	
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4	
Installation position	variable	
Protection rating	IP20	
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 93], IECEx [► 95]	

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.17.2 KL1804, KL1814 - LEDs and connection

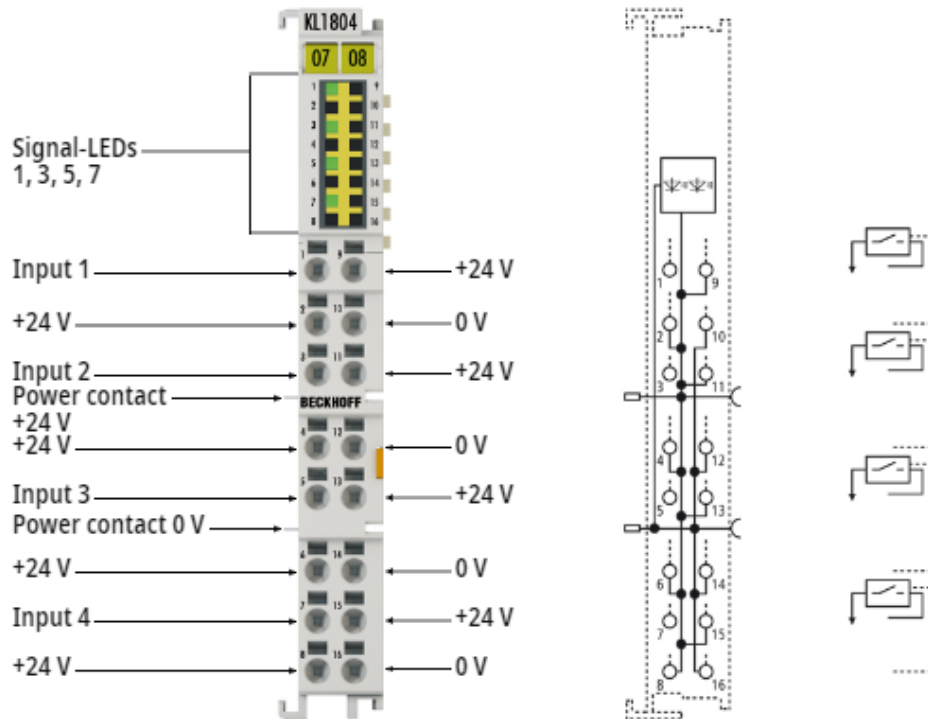


Fig. 44: KL1804 - LEDs and connection

KL1804, KL1814 - LEDs

LED	Color	Meaning
Signal LEDs 1, 3, 5, 7	green	off Signal voltage "0" (-3 V ... 5 V)
		on Signal voltage "1" (11 V ... 30 V)

KL1804, KL1814 - Contact assignment

Terminal point		Description
Name	No.	
Input 1	1	Input 1
+24 V	2	+ 24 V (internally connected to terminal point 4, 6, 8, 9, 11, 13, 15 and positive power contact)
Input 2	3	Input 2
+24 V	4	+ 24 V (internally connected to terminal point 2, 6, 8, 9, 11, 13, 15 and positive power contact)
Input 3	5	Input 3
+24 V	6	+ 24 V (internally connected to terminal point 2, 4, 8, 9, 11, 13, 15 and positive power contact)
Input 4	7	Input 4
+24 V	8	+ 24 V (internally connected to terminal point 2, 4, 6, 9, 11, 13, 15 and positive power contact)
+24 V	9	+ 24 V (internally connected to terminal point 2, 4, 6, 8, 11, 13, 15 and positive power contact)
0 V	10	0 V (internally connected to terminal point 12, 14, 16 and negative power contact)
+24 V	11	+ 24 V (internally connected to terminal point 2, 4, 6, 8, 9, 13, 15 and positive power contact)
0 V	12	0 V (internally connected to terminal point 10, 14, 16 and negative power contact)
+24 V	13	+ 24 V (internally connected to terminal point 2, 4, 6, 8, 9, 11, 15 and positive power contact)
0 V	14	0 V (internally connected to terminal point 10, 12, 16 and negative power contact)
+24 V	15	+ 24 V (internally connected to terminal point 2, 4, 6, 8, 9, 11, 13 and positive power contact)
0 V	16	0 V (internally connected to terminal point 10, 12, 14 and negative power contact)

2.18 KL1808 - Introduction

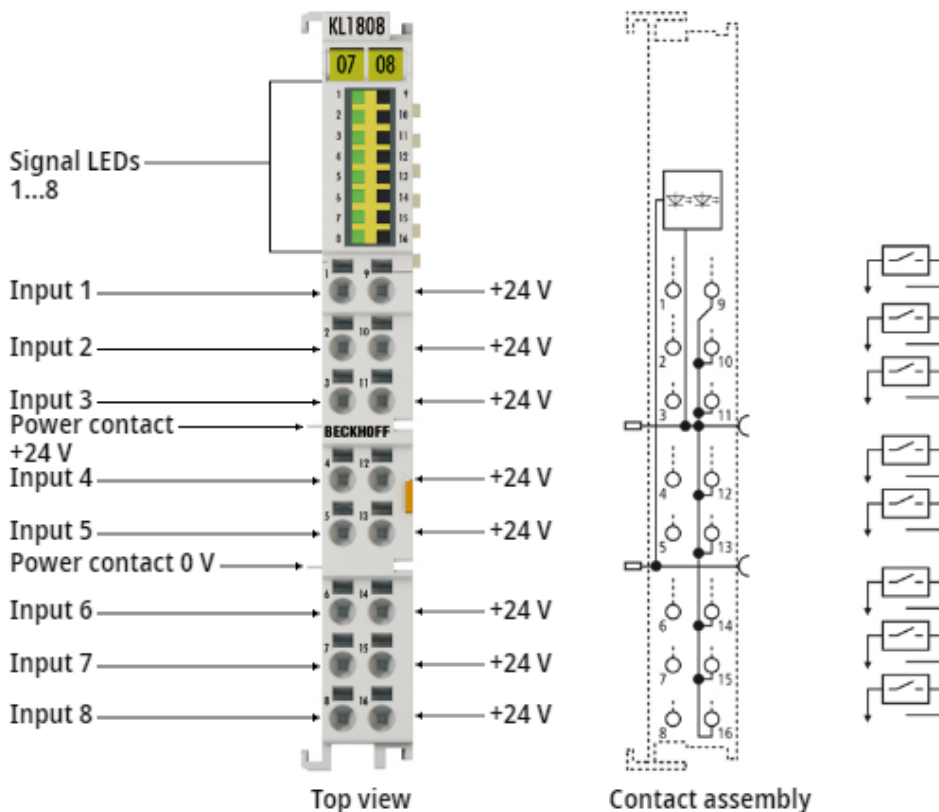


Fig. 45: KL1808

Bus terminal, 8-channel digital input, 24 V_{DC}, 3 ms

The KL1808 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains eight channels, consisting of a signal input and 24 V_{DC}, whose signal states are displayed by light emitting diodes. The power contacts are looped through. With the KL1808, the reference ground for all inputs is the 0 V_{DC} power contact.

2.18.1 KL1808 - Technical data

Technical data	KL1808
Connection technology	2-wire
Specification	EN 61131-2, type 1/3
Number of inputs	8
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)
Input filter	typ. 3 ms
Input current	typ. 3 mA (EN61131-2, type 3)
Current consumption from K-bus	typ. 15 mA
Current consumption of power contacts	typ. 2 mA + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	8 input bits
Configuration	no address or configuration settings required
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; with ferrule: 0.14...0.75 mm ²
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 60 g
Permissible ambient temperature during operation	-25 °C ... +60 °C
Permissible ambient temperature during storage	-40 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.18.2 KL1808 - LEDs and connection

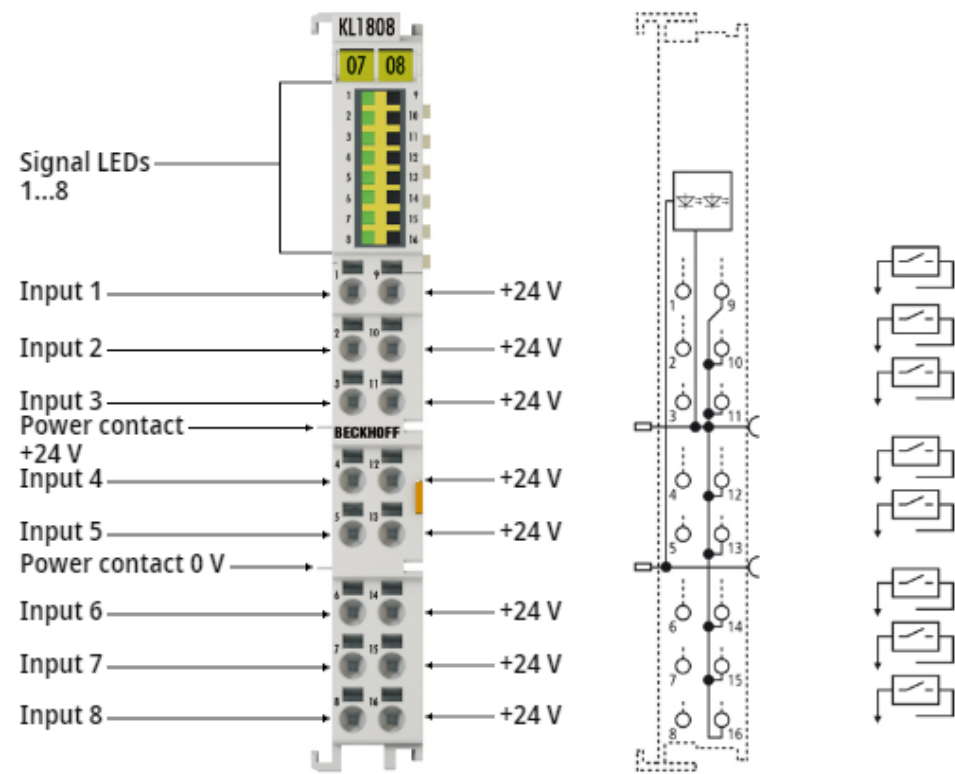


Fig. 46: KL1808 - LEDs and connection

KL1808 - LEDs

LED	Color	Meaning	
INPUT 1- 8	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1808 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 2	2	Input 2
Input 3	3	Input 3
Input 4	4	Input 4
Input 5	5	Input 5
Input 6	6	Input 6
Input 7	7	Input 7
Input 8	8	Input 8
+24 V	9	+24 V (internally connected to terminal point 10, 11, 12, 13, 14, 15, 16 and positive power contact)
+24 V	10	+24 V (internally connected to terminal point 9, 11, 12, 13, 14, 15, 16 and positive power contact)
+24 V	11	+24 V (internally connected to terminal point 9, 10, 12, 13, 14, 15, 16 and positive power contact)
+24 V	12	+24 V (internally connected to terminal point 9, 10, 11, 13, 14, 15, 16 and positive power contact)
+24 V	13	+24 V (internally connected to terminal point 9, 10, 11, 12, 14, 15, 16 and positive power contact)
+24 V	14	+24 V (internally connected to terminal point 9, 10, 11, 12, 13, 15, 16 and positive power contact)
+24 V	15	+24 V (internally connected to terminal point 9, 10, 11, 12, 13, 14, 16 and positive power contact)
+24 V	16	+24 V (internally connected to terminal point 9, 10, 11, 12, 13, 14, 15 and positive power contact)

2.19 KL1809 - Introduction

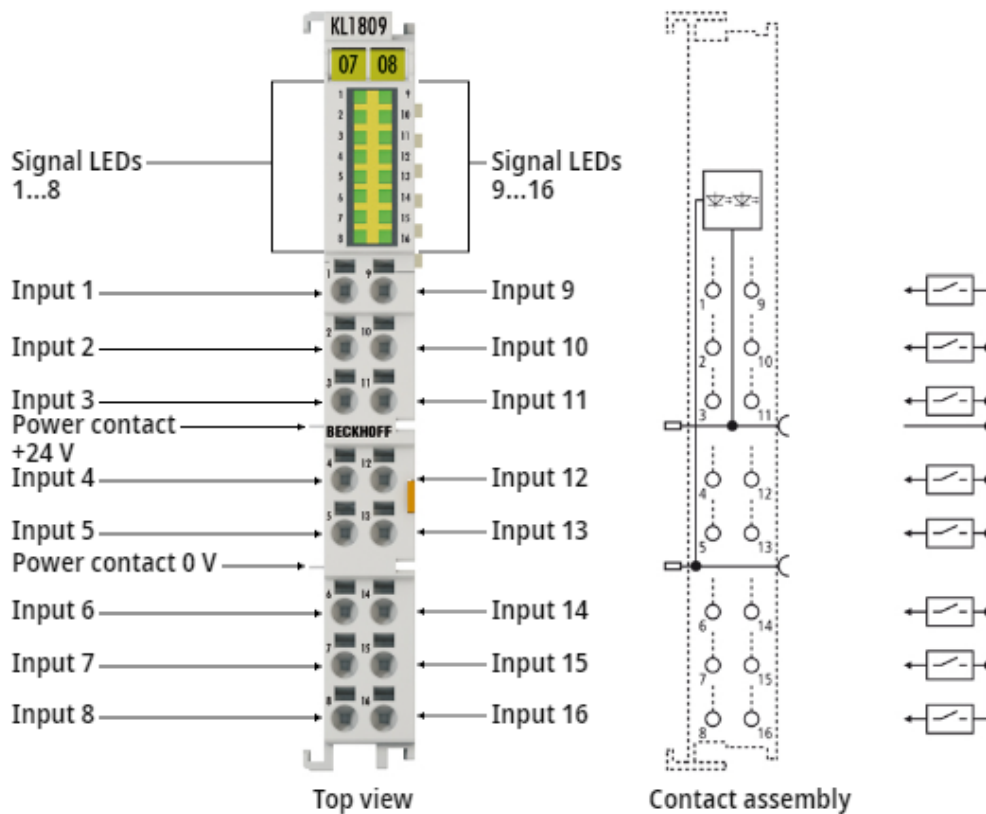


Fig. 47: KL1809

Bus terminal, 16-channel digital input, 24 V_{DC}, 3 ms

The KL1809 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains sixteen channels whose signal states are indicated by light emitting diodes. The power contacts are looped through. With the KL1809, the reference ground for all inputs is the 0 V_{DC} power contact.

2.19.1 KL1809 - Technical data

Technical data	KL1809
Connection technology	1-wire
Specification	EN 61131-2, type 1/3
Number of inputs	16
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)
Input filter	typ. 3 ms
Input current	typ. 3 mA (EN61131-2, type 3)
Current consumption from K-bus	typ. 20 mA
Current consumption of power contacts	typ. 4 mA + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	16 input bits
Configuration	no address or configuration settings required
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; with ferrule: 0.14...0.75 mm ²
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 60 g
Permissible ambient temperature during operation	-25 °C ... +60 °C
Permissible ambient temperature during storage	-40 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.19.2 KL1809 - LEDs and connection

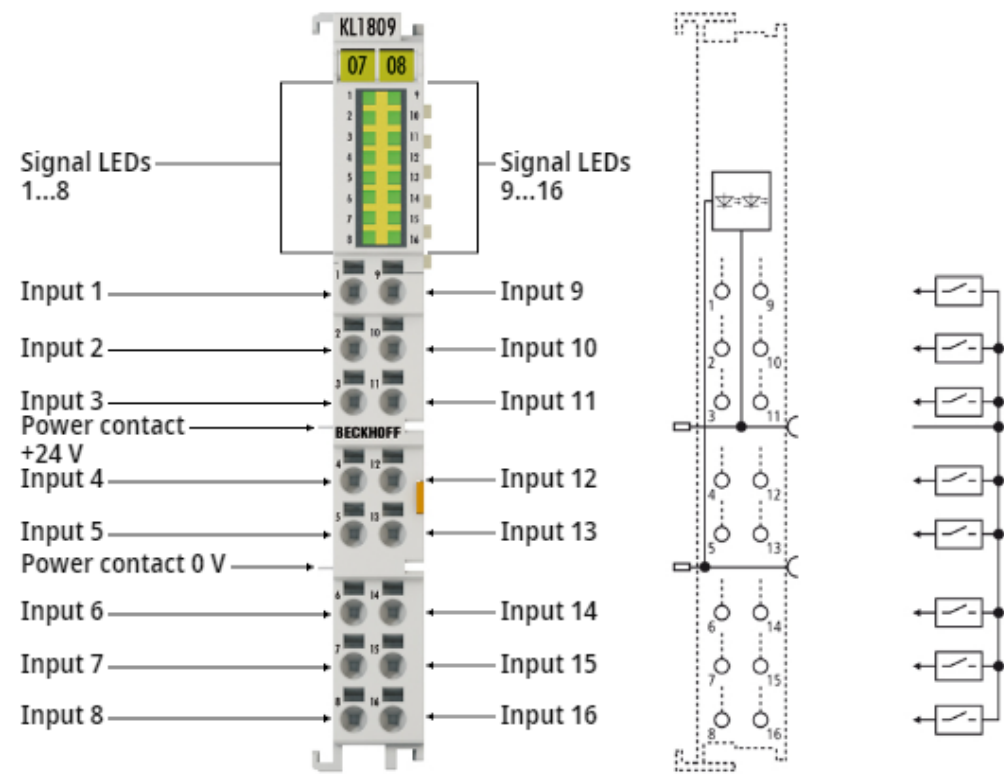


Fig. 48: KL1809 - LEDs and connection

KL1809 - LEDs

LED	Color	Meaning	
INPUT 1 - 16	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1809 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 2	2	Input 2
Input 3	3	Input 3
Input 4	4	Input 4
Input 5	5	Input 5
Input 6	6	Input 6
Input 7	7	Input 7
Input 8	8	Input 8
Input 9	9	Input 9
Input 10	10	Input 10
Input 11	11	Input 11
Input 12	12	Input 12
Input 13	13	Input 13
Input 14	14	Input 14
Input 15	15	Input 15
Input 16	16	Input 16

2.20 KL1819 - Introduction

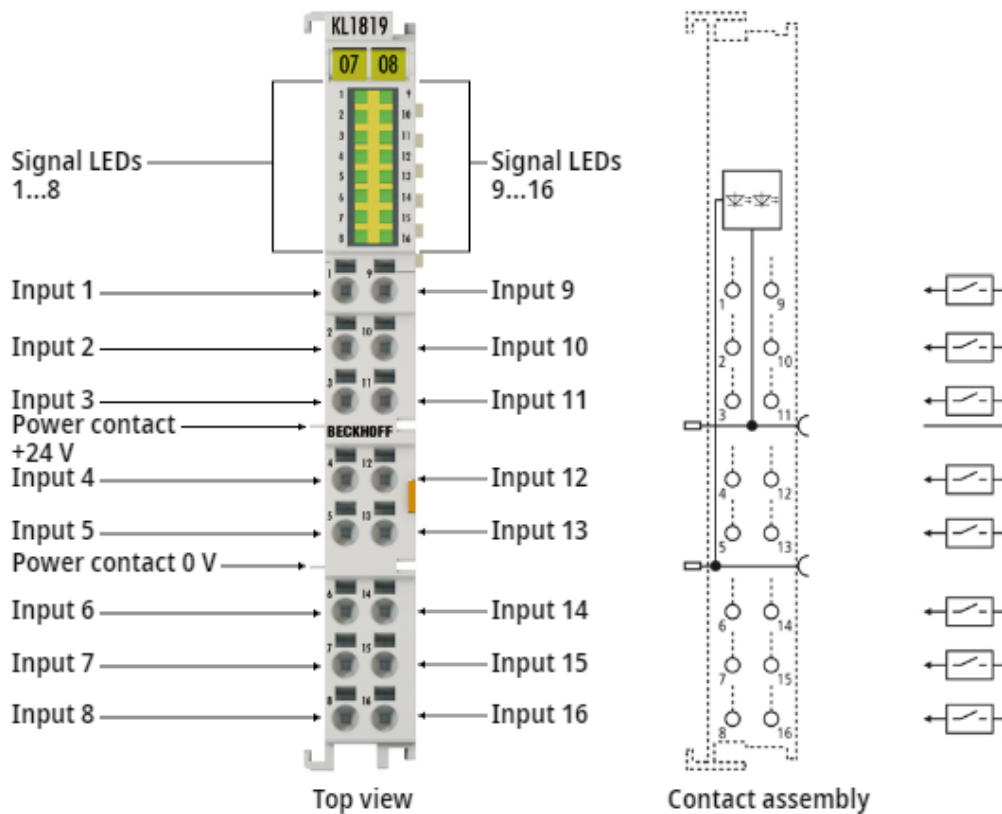


Fig. 49: KL1819

Bus terminal, 16-channel digital input, 24 V_{DC}, 0.2 ms

The KL1819 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains sixteen channels whose signal states are indicated by light emitting diodes. The power contacts are looped through. With the KL1819, the reference ground for all inputs is the 0 V_{DC} power contact.

2.20.1 KL1819 - Technical data

Technical data	KL1819
Connection technology	1-wire
Specification	EN 61131-2, type 1/3
Number of inputs	16
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 V...5 V (EN 61131-2, type 1/3)
Signal voltage '1'	11 V...30 V (EN 61131-2, type 3)
Input filter	typ. 0.2 ms
Input current	typ. 3 mA (EN61131-2, type 3)
Current consumption from K-bus	typ. 20 mA
Current consumption of power contacts	typ. 4 mA + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	16 input bits
Configuration	no address or configuration settings required
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; with ferrule: 0.14...0.75 mm ²
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 60 g
Permissible ambient temperature during operation	-25 °C ... +60 °C
Permissible ambient temperature during storage	-40 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 94], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.20.2 KL1819 - LEDs and connection

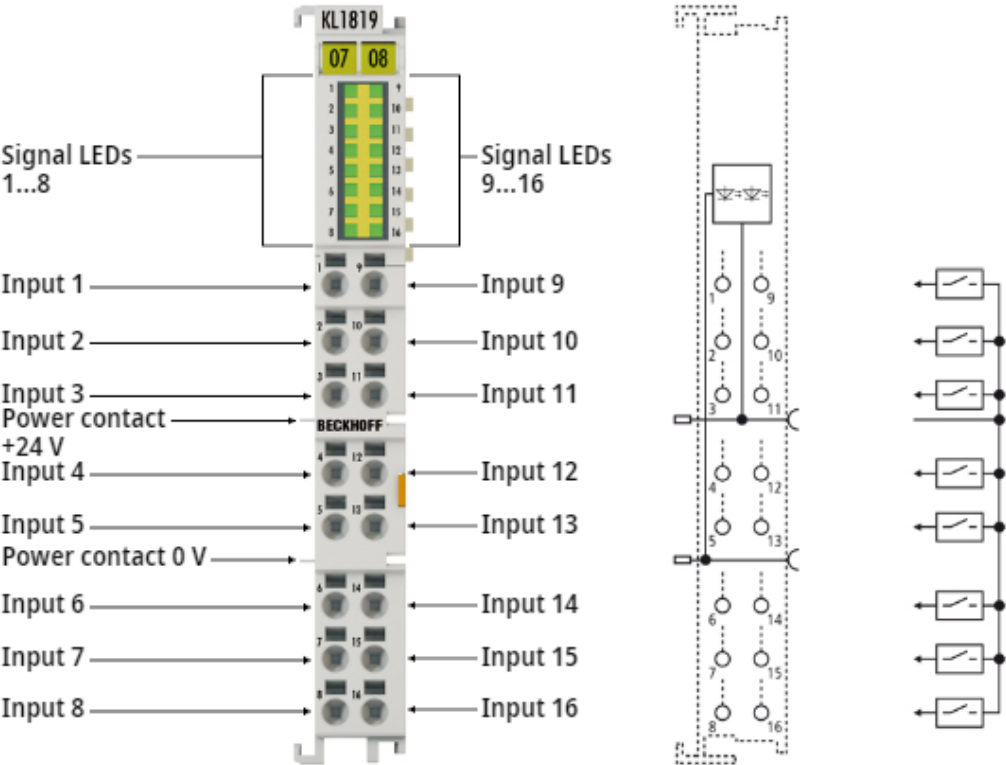


Fig. 50: KL1819 - LEDs and connection

KL1819 - LEDs

LED	Color	Meaning	
INPUT 1 - 16	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1819 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 2	2	Input 2
Input 3	3	Input 3
Input 4	4	Input 4
Input 5	5	Input 5
Input 6	6	Input 6
Input 7	7	Input 7
Input 8	8	Input 8
Input 9	9	Input 9
Input 10	10	Input 10
Input 11	11	Input 11
Input 12	12	Input 12
Input 13	13	Input 13
Input 14	14	Input 14
Input 15	15	Input 15
Input 16	16	Input 16

2.21 KL1859 - Introduction

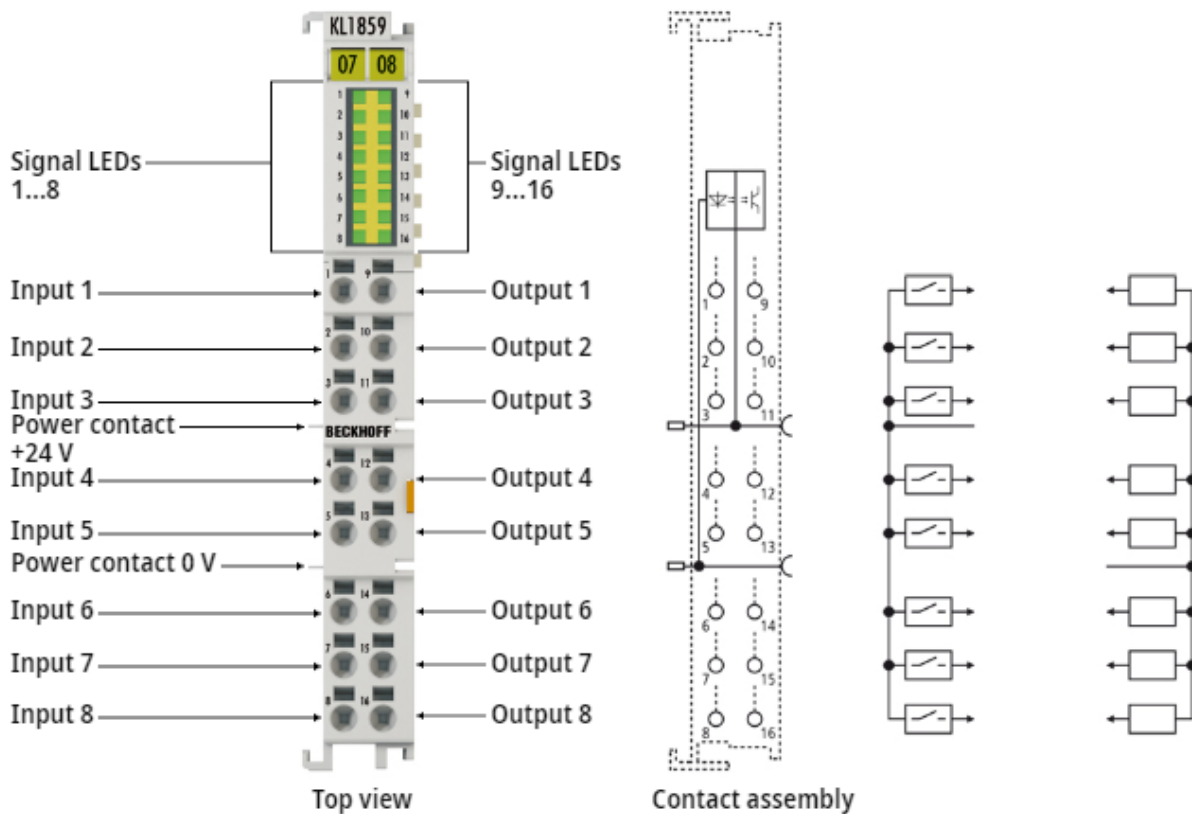


Fig. 51: KL1859

Bus terminal, 8-channel digital input + 8-channel digital output 24 V_{DC}, 3 ms, 0.5 A

The KL1859 digital input terminal combines eight digital inputs and eight digital outputs in one device. The signal state of the channels is indicated by LEDs. The reference ground for all inputs is the 0 V_{DC} power contact; the outputs are fed via the 24 V power contact.

2.21.1 KL1859 - Technical data

Technical data	KL1859
Connection technology	1-wire
Specification	EN 61131-2, type 1/3
Number of inputs	8 inputs + 8 outputs
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	-3 V ... 5 V (EN 61131-2, type 1/3)
Signal voltage '1'	11 V ... 30 V (EN 61131-2, type 3)
Input filter	typ. 3 ms
Input current	typ. 3 mA (EN61131-2, type 3)
Load type	ohmic, inductive, lamp load
Max. output current	0.5 A (per channel)
Reverse polarity protection	yes
Current consumption from K-bus	typ. 25 mA
Current consumption of power contacts	typ. 15 mA + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	8 input bits + 8 output bits
Configuration	no address or configuration settings required
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² ; stranded wire: 0.25...1.5 mm ² ; with ferrule: 0.14...0.75 mm ²
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 60 g
Permissible ambient temperature during operation	0 °C ... +55 °C
Permissible ambient temperature during storage	-25 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, DNV, ATEX [► 93], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.21.2 KL1859 - LEDs and connection

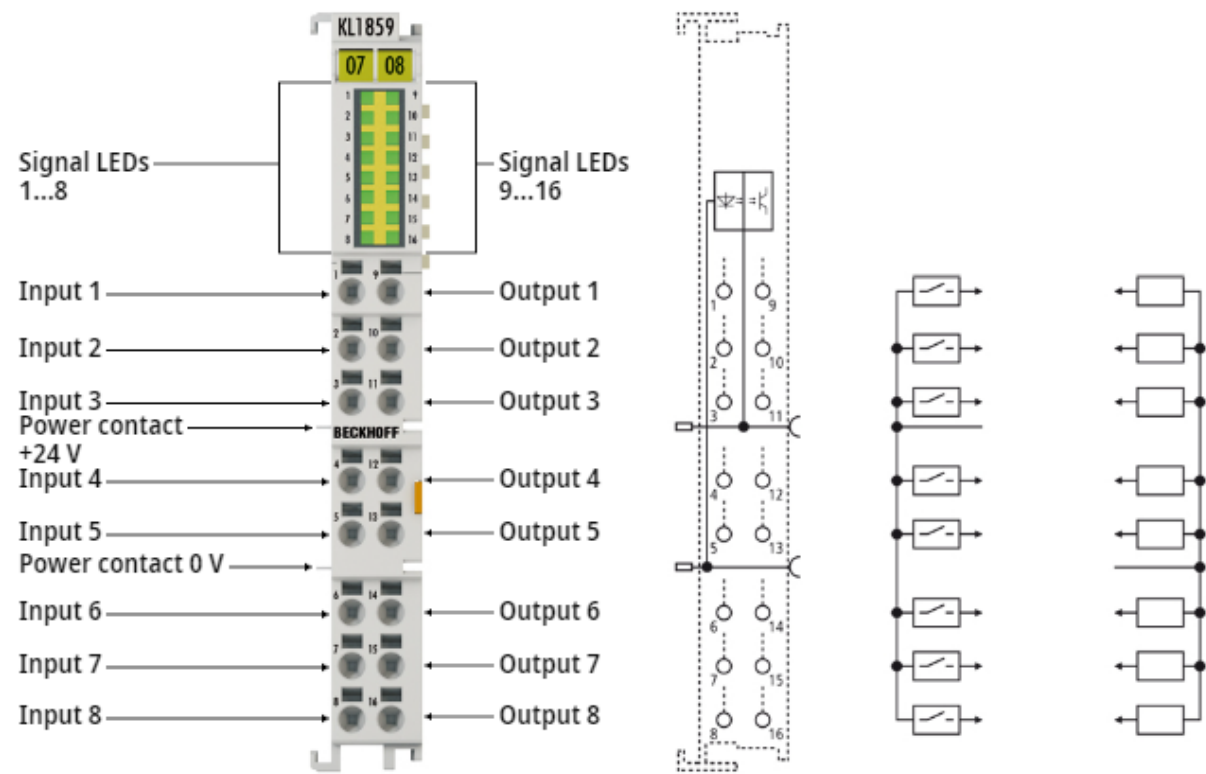


Fig. 52: KL1859 - LEDs and connection

KL1859 - LEDs

LED	Color	Meaning	
INPUT 1- 8	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)
OUTPUT 1- 8	green	off	no output voltage
		on	Output voltage +24 V _{DC}

KL1859 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 2	2	Input 2
Input 3	3	Input 3
Input 4	4	Input 4
Input 5	5	Input 5
Input 6	6	Input 6
Input 7	7	Input 7
Input 8	8	Input 8
Output 1	9	Output 1
Output 2	10	Output 2
Output 3	11	Output 3
Output 4	12	Output 4
Output 5	13	Output 5
Output 6	14	Output 6
Output 7	15	Output 7
Output 8	16	Output 8

2.22 KL1862, KL1862-0010, KL1872 - Introduction

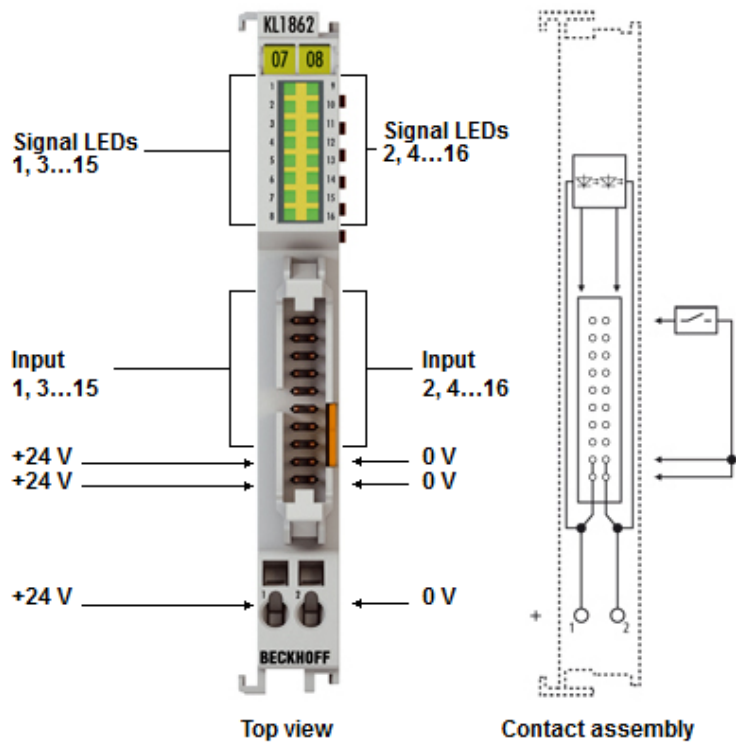


Fig. 53: KL1862 and KL1862-0010

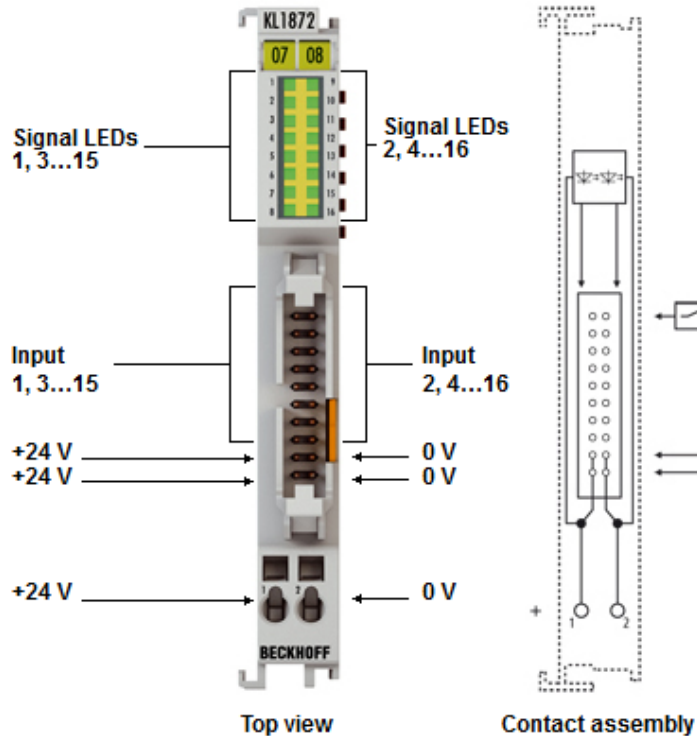


Fig. 54: KL1872

Bus terminal, 16-channel digital input, 24 V_{DC}, flat-ribbon cable connection

The KL1862 and KL1872 digital input terminals offer a very compact design with their 16 channels. A 20-pin contact strip enables the secure connection of connectors using piercing connection, as is usual for flat-ribbon cables and special round cables. This significantly simplifies the wiring of many channels. 16 LEDs display the logical signal states of the inputs.

2.22.1 KL1862, KL1862-0010, KL1872 - Technical data

Technical data	KL1862	KL1862-0010	KL1872
Connection technology	Flat-ribbon cable		
Specification	EN 61131-2, type 1/3	ground switching	EN 61131-2, type 1/3
Number of inputs	16		
Nominal voltage	24 V _{DC} (-15 %/+20 %)		
Signal voltage '0'	-3 V ... 5 V	18 V ... 30 V	-3 V ... 5 V
Signal voltage '1'	11 V ... 30 V	0 V ... 7 V	11 V ... 30 V
Input current	typ. 3 mA		
Input filter	typ. 3 ms		typ. 0.2 ms
Current consumption from K-bus	typ. 3 mA		
Current consumption from flat-ribbon cable connection (24 V _{DC})	typ. 4 mA		
Electrical isolation	500 V (K-bus / field voltage)		
Bit width in process image	16 input bits		
Configuration	no address or configuration settings required		
Dimensions (W x H x D)	12 mm x 100 mm x 73 mm		
Weight	approx. 50 g		
Permissible ambient temperature during operation	0 °C ... +55 °C		
Permissible ambient temperature during storage	-25 °C ... +85 °C		
Permissible relative humidity	95%, no condensation		
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity		
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27		
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4		
Installation position	variable		
Protection rating	IP20		
Markings/approvals*	CE, UKCA, cULus, EAC, CCC, ATEX [► 93], IECEx [► 95]		

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.22.2 KL1862, KL1862-0010, KL1872 - LEDs and connection

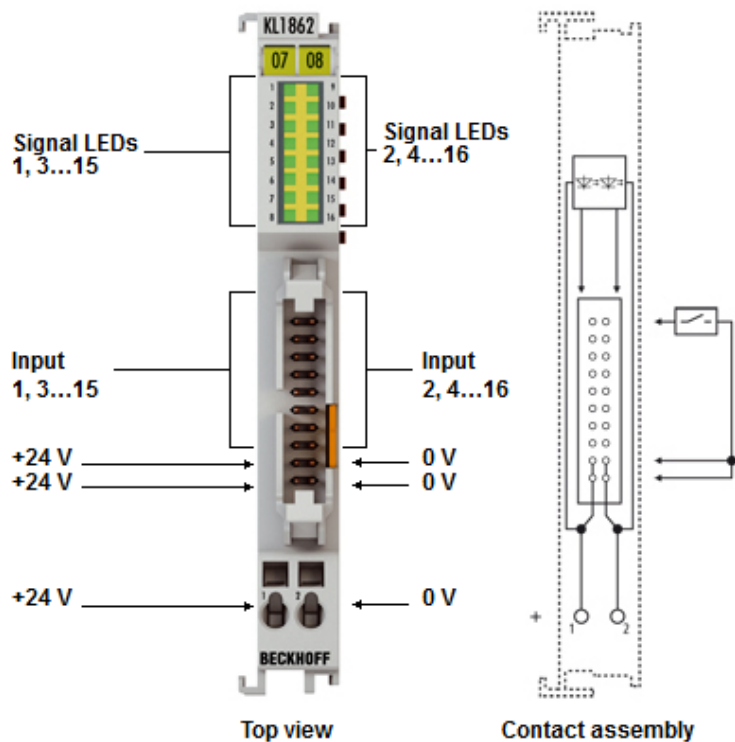


Fig. 55: KL1862 - LEDs and connection

KL1862, KL1862-0010, KL1872 - LEDs

LED	Color	Meaning	
Signal LED 1 - 16	green	off	Signal voltage "0" (-3 V ... 5 V)
		on	Signal voltage "1" (11 V ... 30 V)

KL1862, KL1862-0010, KL1872 - Connection

2 x 10-pin connector RM 2.54 mm with locking mechanism for connecting a 2 x 10-pin connector (socket with piercing connection for flat-ribbon cable); standard flat-ribbon cable connector (standardized according to IEC 60603-13).

2.23 KL1889 - Introduction

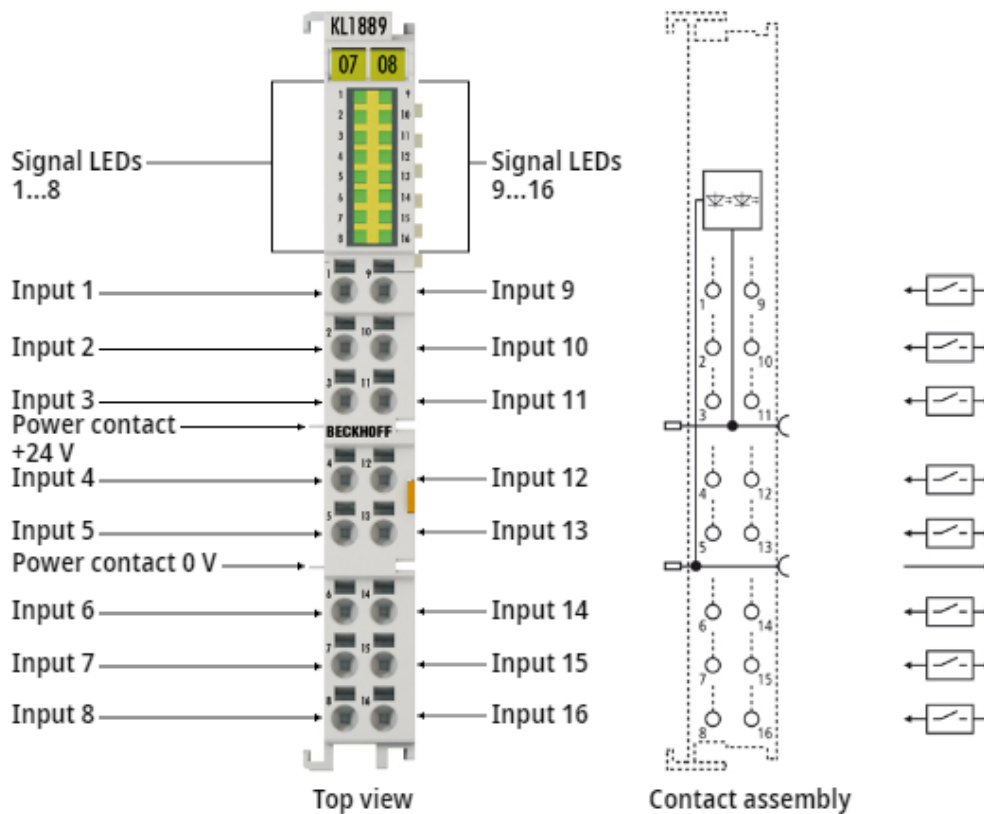


Fig. 56: KL1889

Bus terminal, 16-channel digital input, 24 V_{DC}, 3 ms, ground switching

The KL1889 digital input terminal acquires the binary 24 V_{DC} control signals from the process level and transmits them, in electrically isolated form, to the higher-level automation device. The bus terminal contains sixteen channels whose signal states are indicated by light emitting diodes. The power contacts are looped through. With the KL1889, the reference ground for all inputs is the 24 V_{DC} power contact.

2.23.1 KL1889 - Technical data

Technical data	KL1889
Connection technology	1-wire
Specification	ground switching
Number of inputs	16
Nominal voltage	24 V _{DC} (-15 %/+20 %)
Signal voltage '0'	18 V ... 30 V
Signal voltage '1'	0 V ... 7 V
Input filter	typ. 3 ms
Input current	typ. 3 mA (EN61131-2, type 3)
Current consumption from K-bus	typ. 20 mA
Current consumption of power contacts	typ. 4 mA + load
Electrical isolation	500 V (K-bus / field voltage)
Bit width in process image	16 input bits
Configuration	no address or configuration settings required
Conductor types	solid wire, stranded wire and ferrule
Conductor connection	solid wire conductors: direct plug-in technique; stranded wire conductors and ferrules: spring actuation by screwdriver
Rated cross-section	solid wire: 0.08...1.5 mm ² stranded wire: 0.25...1.5 mm ² with ferrule: 0.14...0.75 mm ²
Dimensions (W x H x D)	12 mm x 100 mm x 68 mm
Weight	approx. 55 g
Permissible ambient temperature during operation	-25 °C ... +60 °C
Permissible ambient temperature during storage	-40 °C ... +85 °C
Permissible relative humidity	95%, no condensation
Enhanced mechanical load capacity	yes, see Installation instructions [► 88] for enhanced mechanical load capacity
Vibration / shock resistance	conforms to EN 60068-2-6 / EN 60068-2-27
EMC immunity / emission	conforms to EN 61000-6-2 / EN 61000-6-4
Installation position	variable
Protection rating	IP20
Markings/approvals*	CE, UKCA, cULus, EAC, DNV, ATEX [► 94], IECEx [► 95]

*) Real applicable approvals/markings see type plate on the side (product marking).

Ex markings

Standard	Marking
ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc

2.23.2 KL1889 - LEDs and connection

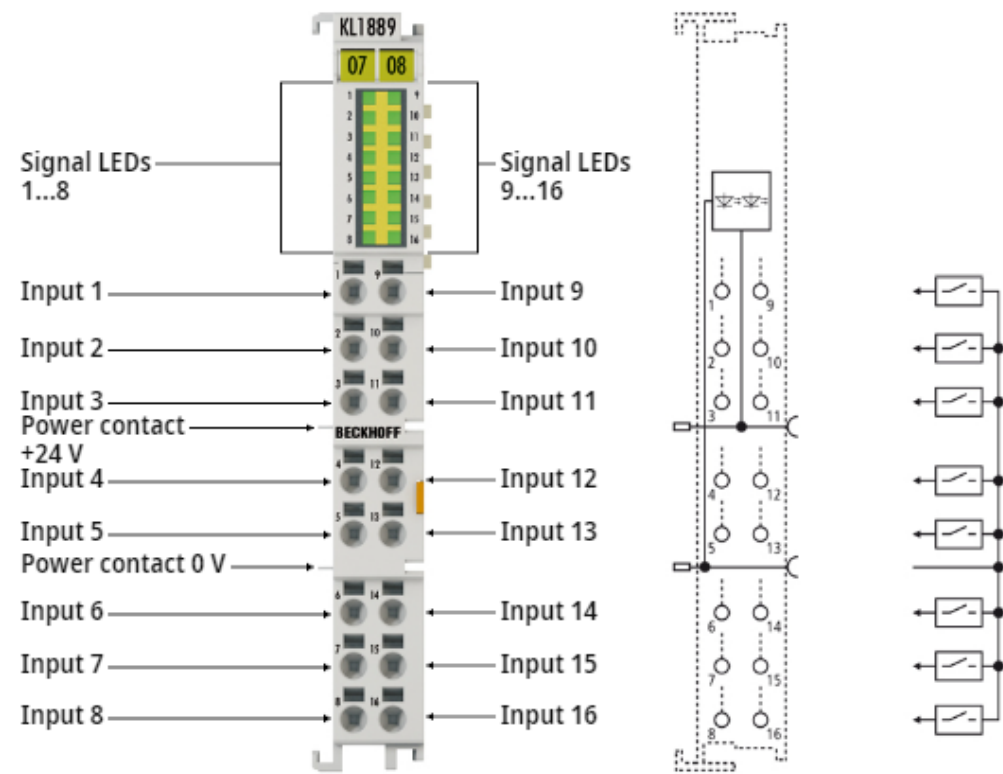


Fig. 57: KL1889 - LEDs and connection

KL1889 - LEDs

LED	Color	Meaning	
INPUT 1- 16	green	off	Signal voltage "0" (18 ... 30 V)
		on	Signal voltage "1" (0 ... 7 V)

KL1889 - Connection

Terminal point		Description
Name	No.	
Input 1	1	Input 1
Input 2	2	Input 2
Input 3	3	Input 3
Input 4	4	Input 4
Input 5	5	Input 5
Input 6	6	Input 6
Input 7	7	Input 7
Input 8	8	Input 8
Input 9	9	Input 9
Input 10	10	Input 10
Input 11	11	Input 11
Input 12	12	Input 12
Input 13	13	Input 13
Input 14	14	Input 14
Input 15	15	Input 15
Input 16	16	Input 16

3 Mounting and wiring

3.1 Instructions for ESD protection

NOTICE

Destruction of the devices by electrostatic discharge possible!

The devices contain components at risk from electrostatic discharge caused by improper handling.

- Please ensure you are electrostatically discharged and avoid touching the spring contacts (see fig.) of the device directly.
- Avoid contact with highly insulating materials (synthetic fibers, plastic film etc.).
- Surroundings (working place, packaging and personnel) should be grounded probably, when handling with the devices.
- Each assembly must be terminated at the right hand end with a KL9010 bus end terminal, to ensure the protection class and ESD protection.

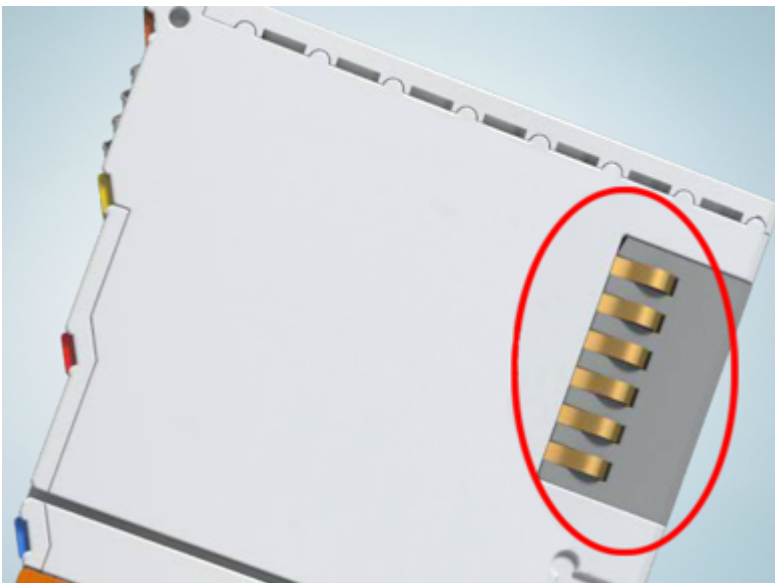


Fig. 58: Spring contacts of the Beckhoff I/O components

3.2 Installation on mounting rails

⚠ WARNING

Risk of electric shock and damage of device!

Bring the bus terminal system into a safe, powered down state before starting installation, disassembly or wiring of the bus terminals!

The Bus Terminal system and is designed for mounting in a control cabinet or terminal box.

Assembly

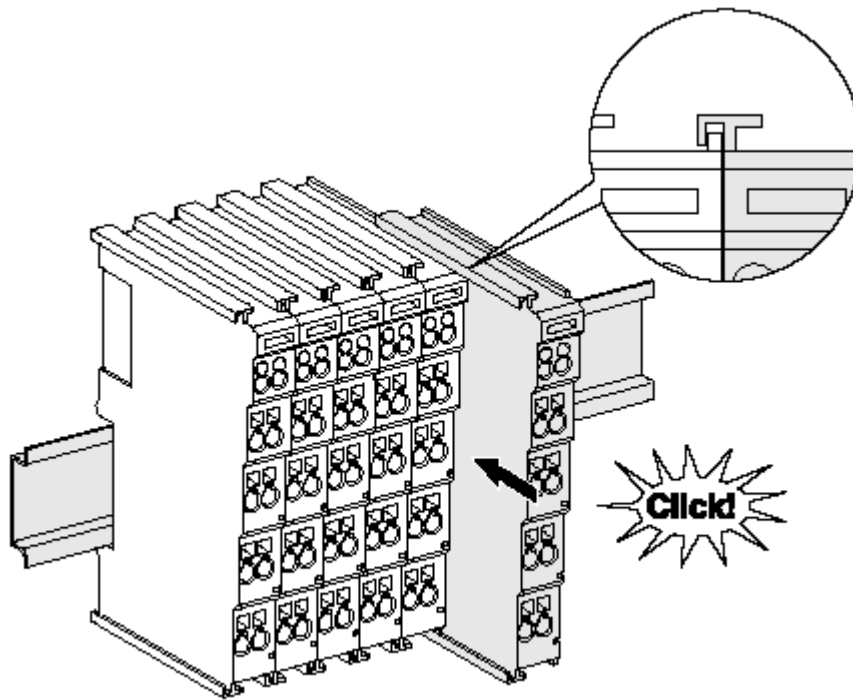


Fig. 59: Attaching on mounting rail

The bus coupler and bus terminals are attached to commercially available 35 mm mounting rails (DIN rails according to EN 60715) by applying slight pressure:

1. First attach the fieldbus coupler to the mounting rail.
2. The bus terminals are now attached on the right-hand side of the fieldbus coupler. Join the components with tongue and groove and push the terminals against the mounting rail, until the lock clicks onto the mounting rail.

If the terminals are clipped onto the mounting rail first and then pushed together without tongue and groove, the connection will not be operational! When correctly assembled, no significant gap should be visible between the housings.

● Fixing of mounting rails

i The locking mechanism of the terminals and couplers extends to the profile of the mounting rail. At the installation, the locking mechanism of the components must not come into conflict with the fixing bolts of the mounting rail. To mount the mounting rails with a height of 7.5 mm under the terminals and couplers, you should use flat mounting connections (e.g. countersunk screws or blind rivets).

NOTICE

Ground the mounting rail!

Ensure that the mounting rail is sufficiently grounded.

Connections within a bus terminal block

The electric connections between the Bus Coupler and the Bus Terminals are automatically realized by joining the components:

- The six spring contacts of the E-Bus/K-Bus deal with the transfer of the data and the supply of the Bus Terminal electronics.
- The power contacts deal with the supply for the field electronics and thus represent a supply rail within the bus terminal block. The power contacts are supplied via terminals points on the Bus Coupler (up to 24 V) or for higher voltages via power feed terminals.



Power Contacts

During the design of a bus terminal block, the pin assignment of the individual Bus Terminals must be taken account of, since some types (e.g. analog Bus Terminals or digital 4-channel Bus Terminals) do not or not fully loop through the power contacts. Power Feed Terminals (EL91xx, EL92xx or KL91xx, KL92xx) interrupt the power contacts and thus represent the start of a new supply rail.

Power contact $\perp$

The power contact labeled $\perp$ (earthing connection according to IEC 60417-5017, British English: earth, American English: ground) can be used as grounding. For safety reasons this contact mates first when plugging together, and can ground short-circuit currents of up to 125 A.

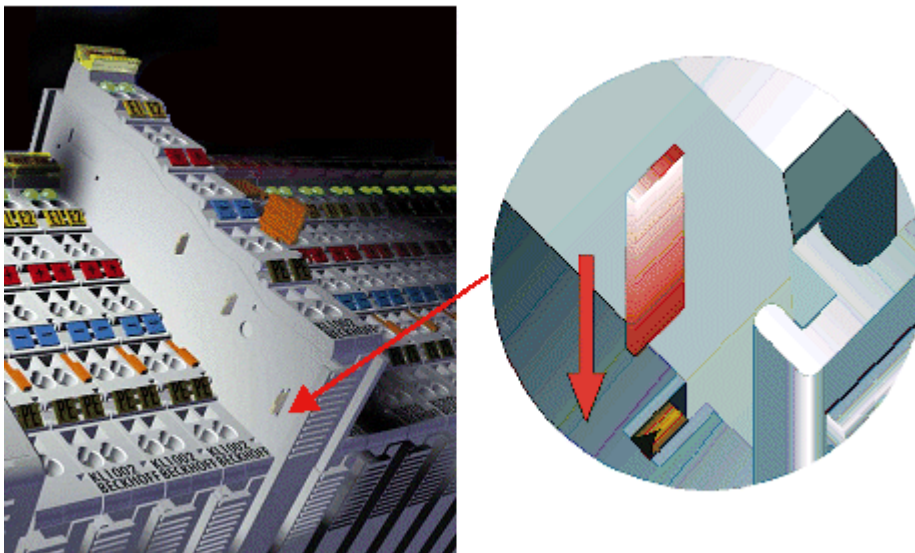


Fig. 60: Power contact on left side

WARNING

Risk of electric shock!

The power contact labeled $\perp$ must not be used for other potentials!

NOTICE

Possible damage of the device

Note that, for reasons of electromagnetic compatibility, the earthing contacts are capacitatively coupled to the mounting rail. This may lead to incorrect results during insulation testing or to damage on the terminal (e.g. disruptive discharge to the earthing line during insulation testing of a consumer with a nominal voltage of 230 V). For insulation testing, disconnect the earthing supply line at the Bus Coupler or the Power Feed Terminal! In order to decouple further feed points for testing, these Power Feed Terminals can be released and pulled at least 10 mm from the group of terminals.

Disassembly

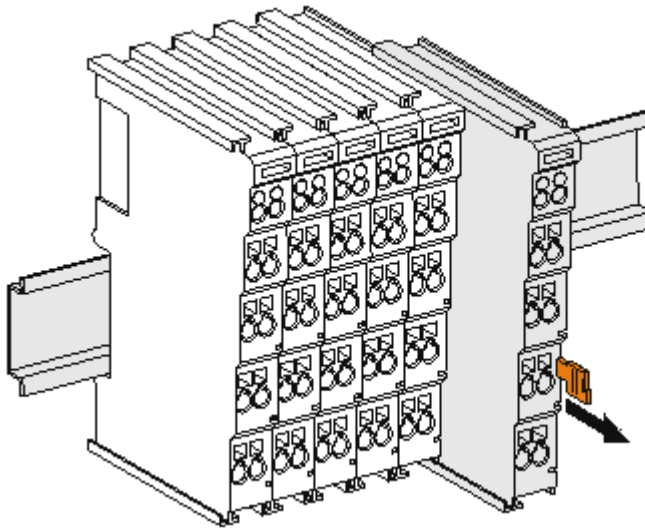


Fig. 61: Disassembling of terminal

Each terminal is secured by a lock on the mounting rail, which must be released for disassembly:

1. Pull the terminal by its orange-colored lugs approximately 1 cm away from the mounting rail. In doing so for this terminal the mounting rail lock is released automatically and you can pull the terminal out of the bus terminal block easily without excessive force.
2. Grasp the released terminal with thumb and index finger simultaneous at the upper and lower grooved housing surfaces and pull the terminal out of the bus terminal block.

3.3 Disposal



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

3.4 Installation instructions for enhanced mechanical load capacity

WARNING

Risk of injury through electric shock and damage to the device!

Bring the Bus Terminal system into a safe, de-energized state before starting mounting, disassembly or wiring of the Bus Terminals!

Additional checks

The terminals have undergone the following additional tests:

Verification	Explanation
Vibration	10 frequency runs in 3 axes
	6 Hz < f < 60 Hz displacement 0.35 mm, constant amplitude
	60.1 Hz < f < 500 Hz acceleration 5 g, constant amplitude
Shocks	1000 shocks in each direction, in 3 axes
	25 g, 6 ms

Additional installation instructions and notes

For terminals with enhanced mechanical load capacity, the following additional installation instructions and notes apply:

- The enhanced mechanical load capacity is valid for all permissible installation positions.
- Use a mounting rail according to EN 60715 TH35-15.
- Fix the terminal segment on both sides of the mounting rail with a mechanical fixture, e.g. an earth terminal or reinforced end clamp.
- The maximum total extension of the terminal segment (without coupler) is:
64 terminals (12 mm mounting width) or 32 terminals (24 mm mounting width)
- Avoid deformation, twisting, crushing and bending of the mounting rail during edging and installation of the rail.
- The mounting points of the mounting rail must be set at 5 cm intervals.
- Use countersunk head screws to fasten the mounting rail.
- The free length between the strain relief and the wire connection should be kept as short as possible. A distance of approx. 10 cm should be maintained to the cable duct.

3.5 Connection

3.5.1 Connection system

⚠ WARNING

Risk of electric shock and damage of device!

Bring the bus terminal system into a safe, powered down state before starting installation, disassembly or wiring of the bus terminals!

Overview

The bus terminal system offers different connection options for optimum adaptation to the respective application:

- The terminals of ELxxxx and KLxxxx series with standard wiring include electronics and connection level in a single enclosure.
- The terminals of ESxxxx and KSxxxx series feature a pluggable connection level and enable steady wiring while replacing.
- The High Density Terminals (HD Terminals) include electronics and connection level in a single enclosure and have advanced packaging density.

Standard wiring (ELxxxx / KLxxxx)



Fig. 62: Standard wiring

The terminals of the ELxxxx and KLxxxx series integrate screwless spring-cage technology for quick and easy wiring.

Pluggable wiring (ESxxxx / KSxxxx)



Fig. 63: Pluggable wiring

The terminals of ESxxxx and KSxxxx series feature a pluggable connection level. The assembly and wiring procedure is the same as for the ELxxxx and KLxxxx series. The pluggable connection level enables the complete wiring to be removed as a plug connector from the top of the housing for servicing. The lower section can be removed from the terminal block by pulling the unlocking tab. Insert the new component and plug in the connector with the wiring. This reduces the installation time and eliminates the risk of wires being mixed up.

The familiar dimensions of the terminal only had to be changed slightly. The new connector adds about 3 mm. The maximum height of the terminal remains unchanged.

A tab for strain relief of the cable simplifies assembly in many applications and prevents tangling of individual connection wires when the connector is removed.

Conductor cross sections between 0.08 mm² and 2.5 mm² can continue to be used with the proven spring force technology.

The overview and nomenclature of the product names for ESxxxx and KSxxxx series has been retained as known from ELxxxx and KLxxxx series.

High Density Terminals (HD Terminals)



Fig. 64: High Density Terminals

The terminals from these series with 16/32 terminal points are distinguished by a particularly compact design, as the packaging density is twice as large as that of the standard 12 mm bus terminals. Massive conductors and conductors with a wire end sleeve can be inserted directly into the spring loaded terminal point without tools.



Wiring HD Terminals

The High Density Terminals of the ELx8xx and KLx8xx series doesn't support pluggable wiring.

Ultrasonically compacted (ultrasonically welded) strands



Ultrasonically compacted (ultrasonically welded) strands

Ultrasonically compacted (ultrasonically welded) strands can also be connected to the standard and high-density terminals. In this case, please note the tables concerning the wire-size width [► 92]!

3.5.2 Wiring

⚠ WARNING

Risk of electric shock and damage of device!

Bring the bus terminal system into a safe, powered down state before starting installation, disassembly or wiring of the bus terminals!

Terminals for standard wiring ELxxxx/KLxxxx and for pluggable wiring ESxxxx/KSxxxx

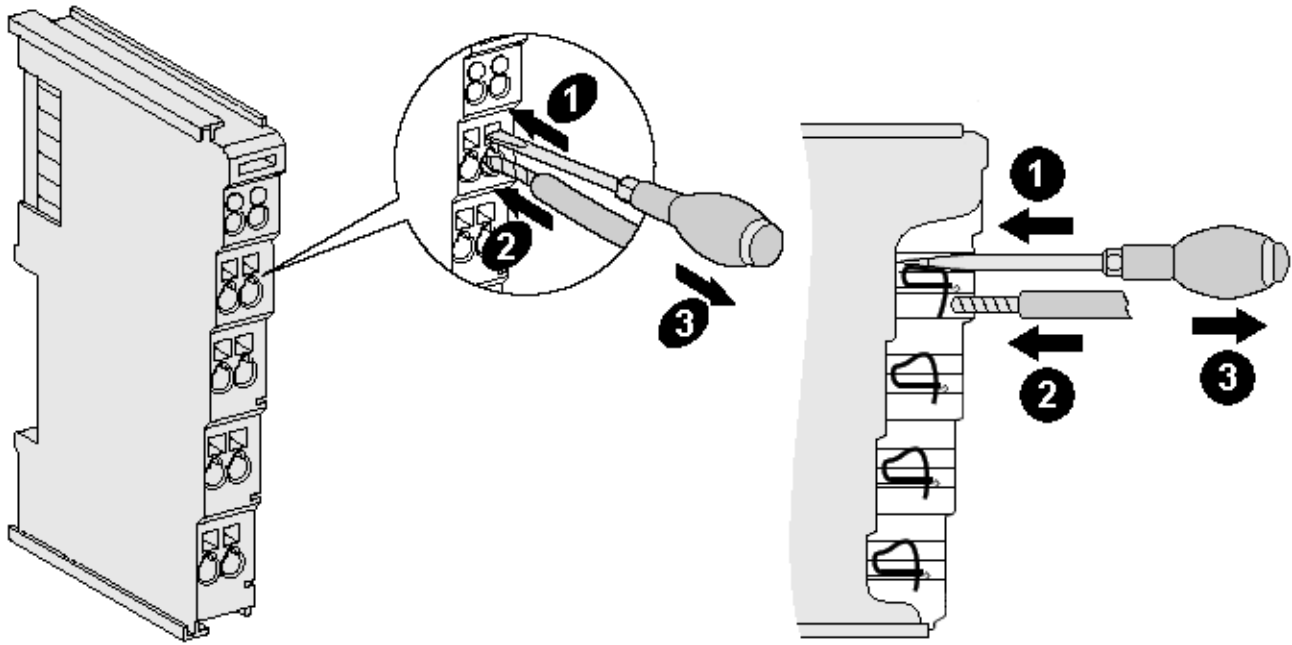


Fig. 65: Connecting a cable on a terminal point

Up to eight terminal points enable the connection of solid or finely stranded cables to the bus terminal. The terminal points are implemented in spring force technology. Connect the cables as follows (see fig. "Connecting a cable on a terminal point"):

1. Open a terminal point by pushing a screwdriver straight against the stop into the square opening above the terminal point. Do not turn the screwdriver or move it alternately (don't toggle).
2. The wire can now be inserted into the round terminal opening without any force.
3. When the screwdriver is removed, the terminal point closes automatically and holds the wire securely and permanently in place

See the following table for the suitable wire size width:

Terminal housing	ELxxxx, KLxxxx	ESxxxx, KSxxxx
Wire size width (single core wires)	0.08 ... 2.5 mm ²	0.08 ... 2.5 mm ²
Wire size width (fine-wire conductors)	0.08 ... 2.5 mm ²	0.08 ... 2.5 mm ²
Wire size width (conductors with a wire end sleeve)	0.14 ... 1.5 mm ²	0.14 ... 1.5 mm ²
Wire stripping length	8 ... 9 mm	9 ... 10 mm

High Density Terminals ([HD Terminals](#) [[► 90](#)]) with 16/32 terminal points

The conductors of the HD Terminals are connected without tools for single-wire conductors using the direct plug-in technique, i.e. after stripping the wire is simply plugged into the terminal point. The cables are released, as usual, using the contact release with the aid of a screwdriver. See the following table for the suitable wire size width.

Terminal housing	High Density Housing
Wire size width (single core wires)	0.08 ... 1.5 mm ²
Wire size width (fine-wire conductors)	0.25 ... 1.5 mm ²
Wire size width (conductors with a wire end sleeve)	0.14 ... 0.75 mm ²
Wire size width (ultrasonically compacted [ultrasonically welded] strands)	only 1.5 mm ² (see notice [► 90])
Wire stripping length	8 ... 9 mm

3.5.3 Shielding**Shielding**

Encoder, analog sensors and actuators should always be connected with shielded, twisted paired wires.

3.6 ATEX - Special conditions (standard temperature range)

WARNING

Observe the special conditions for the intended use of Beckhoff fieldbus components with standard temperature range in potentially explosive areas!

- The certified components are to be installed in a suitable housing that guarantees a protection class of at least IP54 in accordance with EN 60079-7! The environmental conditions during use are thereby to be taken into account!
- If the temperatures during rated operation are higher than 70°C at the feed-in points of cables, lines or pipes, or higher than 80°C at the wire branching points, then cables must be selected whose temperature data correspond to the actual measured temperature values!
- Observe the permissible ambient temperature range of 0 to 55°C for the use of Beckhoff fieldbus components standard temperature range in potentially explosive areas!
- Measures must be taken to protect against the rated operating voltage being exceeded by more than 40% due to short-term interference voltages!
- The individual terminals may only be unplugged or removed from the Bus Terminal system if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The connections of the certified components may only be connected or disconnected if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The fuses of the KL92xx/EL92xx power feed terminals may only be exchanged if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- Address selectors and ID switches may only be adjusted if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!

Standards

The fundamental health and safety requirements are fulfilled by compliance with the following standards:

- EN IEC 60079-0:2018
- EN 60079-7:2015+A1:2018

Marking

The Beckhoff fieldbus components with standard temperature range certified according to regulations for potentially explosive areas bear the following marking:



II 3 G Ex ec IIC T4 Gc
 KEMA 10 ATEX0075 X
 DEKRA 22UKEX6024X
 Ta: 0 ... + 55°C

3.7 ATEX - Special conditions (extended temperature range)

⚠ WARNING

Observe the special conditions for the intended use of Beckhoff fieldbus components with extended temperature range (ET) in potentially explosive areas!

- The certified components are to be installed in a suitable housing that guarantees a protection class of at least IP54 in accordance with EN 60079-7! The environmental conditions during use are thereby to be taken into account!
- If the temperatures during rated operation are higher than 70°C at the feed-in points of cables, lines or pipes, or higher than 80°C at the wire branching points, then cables must be selected whose temperature data correspond to the actual measured temperature values!
- Observe the permissible ambient temperature range of -25 to 60°C for the use of Beckhoff fieldbus components with extended temperature range (ET) in potentially explosive areas!
- Measures must be taken to protect against the rated operating voltage being exceeded by more than 40% due to short-term interference voltages!
- The individual terminals may only be unplugged or removed from the Bus Terminal system if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The connections of the certified components may only be connected or disconnected if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The fuses of the KL92xx/EL92xx power feed terminals may only be exchanged if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- Address selectors and ID switches may only be adjusted if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!

Standards

The fundamental health and safety requirements are fulfilled by compliance with the following standards:

- EN IEC 60079-0:2018
- EN 60079-7:2015+A1:2018

Marking

The Beckhoff fieldbus components with extended temperature range (ET) certified according to regulations for potentially explosive areas bear the following marking:



II 3 G Ex ec IIC T4 Gc
 KEMA 10 ATEX0075 X
 DEKRA 22UKEX6024X
 Ta: -25 ... + 60°C

3.8 IECEx - Special conditions

⚠ WARNING

Observe the special conditions for the intended use of Beckhoff fieldbus components in potentially explosive areas!

- For gas: The equipment shall be installed in a suitable enclosure providing a degree of protection of IP54 according to IEC 60079-7, taking into account the environmental conditions under which the equipment is used!
- The equipment shall only be used in an area of at least pollution degree 2, as defined in IEC 60664-1!
- Provisions shall be made to prevent the rated voltage from being exceeded by transient disturbances of more than 119 V!
- If the temperatures during rated operation are higher than 70°C at the feed-in points of cables, lines or pipes, or higher than 80°C at the wire branching points, then cables must be selected whose temperature data correspond to the actual measured temperature values!
- Observe the permissible ambient temperature range for the use of Beckhoff fieldbus components in potentially explosive areas!
- The individual terminals may only be unplugged or removed from the Bus Terminal system if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The connections of the certified components may only be connected or disconnected if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- Address selectors and ID switches may only be adjusted if the supply voltage has been switched off or if a non-explosive atmosphere is ensured!
- The front hatch of certified units may only be opened if the supply voltage has been switched off or a non-explosive atmosphere is ensured!

Standards

The fundamental health and safety requirements are fulfilled by compliance with the following standards:

- IEC 60079-0:2017 (Edition 7.0)
- IEC 60079-7:2017 (Edition 5.1)

Marking

Beckhoff fieldbus components that are certified in accordance with IECEx for use in areas subject to an explosion hazard bear the following marking:

IECEx DEK 16.0078 X

Ex ec IIC T4 Gc

3.9 Continuable documentation for ATEX and IECEx

NOTICE



Continuable documentation about explosion protection according to ATEX and IECEx

Pay also attention to the continuable documentation

Ex. Protection for Terminal Systems

Notes on the use of the Beckhoff terminal systems in hazardous areas according to ATEX and IECEx,

that is available for [download](#) within the download area of your product on the Beckhoff homepage www.beckhoff.com!

4 KS2000 Configuration software

4.1 KS2000 - Introduction

The KS2000 configuration software permits configuration, commissioning and parameterization of bus couplers, of the affiliated bus terminals and of Fieldbus Box Modules. The connection between bus coupler / Fieldbus Box Module and the PC is established by means of the serial configuration cable or the fieldbus.



Fig. 66: KS2000 configuration software

Configuration

You can configure the Fieldbus stations with the Configuration Software KS2000 offline. That means, setting up a terminal station with all settings on the couplers and terminals resp. the Fieldbus Box Modules can be prepared before the commissioning phase. Later on, this configuration can be transferred to the terminal station in the commissioning phase by means of a download. For documentation purposes, you are provided with the breakdown of the terminal station, a parts list of modules used and a list of the parameters you have modified. After an upload, existing fieldbus stations are at your disposal for further editing.

Parameterization

KS2000 offers simple access to the parameters of a fieldbus station: specific high-level dialogs are available for all bus couplers, all intelligent bus terminals and Fieldbus Box modules with the aid of which settings can be modified easily. Alternatively, you have full access to all internal registers of the bus couplers and intelligent terminals. Refer to the register description for the meanings of the registers.

Commissioning

The KS2000 software facilitates commissioning of machine components or their fieldbus stations: Configured settings can be transferred to the fieldbus modules by means of a download. After a *login* to the terminal station, it is possible to define settings in couplers, terminals and Fieldbus Box modules directly *online*. The same high-level dialogs and register access are available for this purpose as in the configuration phase.

The KS2000 offers access to the process images of the bus couplers and Fieldbus Box modules.

- Thus, the coupler's input and output images can be observed by monitoring.
- Process values can be specified in the output image for commissioning of the output modules.

All possibilities in the *online mode* can be used in parallel with the actual fieldbus mode of the terminal station. The fieldbus protocol always has the higher priority in this case.

5 Access from the user program

5.1 Examples of Register Communication

The numbering of the bytes in the examples corresponds to the display without word alignment.

5.1.1 Example 1: Reading the firmware version from register 9

Output Data

Byte 0: Control byte	Byte 1: DataOUT1, high byte	Byte 2: DataOUT1, low byte
0x89 (1000 1001 _{bin})	0xXX	0xXX

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 not set means: reading the register.
- Bits 0.5 to 0.0 specify the register number 9 with 00 1001_{bin}.
- The output data word (byte 1 and byte 2) has no meaning during read access. To change a register, write the required value into the output word.

Input Data (answer of the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0x89	0x33	0x41

Explanation:

- The terminal returns the value of the control byte as a receipt in the status byte.
- The terminal returns the firmware version 0x3341 in the input data word (byte 1 and byte 2). This is to be interpreted as an ASCII code:
 - ASCII code 0x33 represents the digit 3
 - ASCII code 0x41 represents the letter A
 The firmware version is thus 3A.

5.1.2 Example 2: Writing to an user register



Code word

In normal mode all user registers are read-only with the exception of Register 31. In order to deactivate this write protection you must write the code word (0x1235) into Register 31. If a value other than 0x1235 is written into Register 31, write protection is reactivated. Please note that changes to a register only become effective after restarting the terminal (power-off/power-on).

I. Write the code word (0x1235) into register 31.

Output Data

Byte 0: Control byte	Byte 1: DataOUT1, high byte	Byte 2: DataOUT1, low byte
0xDF (1101 1111 _{bin})	0x12	0x35

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 set means: writing to the register.
- Bits 0.5 to 0.0 specify the register number 31 with 01 1111_{bin}.

- The output data word (byte 1 and byte 2) contains the code word (0x1235) for deactivating write protection.

Input Data (answer of the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0x9F (1001 1111 _{bin})	0xXX	0xXX

Explanation:

- The terminal returns a value as a receipt in the status byte that differs only in bit 0.6 from the value of the control byte.
- The input data word (byte 1 and byte 2) is of no importance after the write access. Any values still displayed are invalid!

II. Read Register 31 (check the set code word)

Output Data

Byte 0: Control byte	Byte 1: DataOUT1, high byte	Byte 2: DataOUT1, low byte
0x9F (1001 1111 _{bin})	0xXX	0xXX

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 not set means: reading the register.
- Bits 0.5 to 0.0 specify the register number 31 with 01 1111_{bin}.
- The output data word (byte 1 and byte 2) has no meaning during read access.

Input Data (answer of the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0x9F (1001 1111 _{bin})	0x12	0x35

Explanation:

- The terminal returns the value of the control byte as a receipt in the status byte.
- The terminal returns the current value of the code word register in the input data word (byte 1 and byte 2).

III. Write to Register 32 (change contents of the feature register)

Output data

Byte 0: Control byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0xE0 (1110 0000 _{bin})	0x00	0x02

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 set means: writing to the register.
- Bits 0.5 to 0.0 indicate register number 32 with 10 0000_{bin}.
- The output data word (byte 1 and byte 2) contains the new value for the feature register.

⚠ CAUTION**Observe the register description!**

The value of 0x0002 given here is just an example!

The bits of the feature register change the properties of the terminal and have a different meaning, depending on the type of terminal. Refer to the description of the feature register of your terminal (chapter *Register description*) regarding the meaning of the individual bits before changing the values.

Input data (response from the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0xA0 (1010 0000 _{bin})	0xXX	0xXX

Explanation:

- The terminal returns a value as a receipt in the status byte that differs only in bit 0.6 from the value of the control byte.
- The input data word (byte 1 and byte 2) is of no importance after the write access. Any values still displayed are invalid!

IV. Read register 32 (check changed feature register)**Output Data**

Byte 0: Control byte	Byte 1: DataOUT1, high byte	Byte 2: DataOUT1, low byte
0xA0 (1010 0000 _{bin})	0xXX	0xXX

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 not set means: reading the register.
- Bits 0.5 to 0.0 indicate register number 32 with 10 0000_{bin}.
- The output data word (byte 1 and byte 2) has no meaning during read access.

Input Data (answer of the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0xA0 (1010 0000 _{bin})	0x00	0x02

Explanation:

- The terminal returns the value of the control byte as a receipt in the status byte.
- The terminal returns the current value of the feature register in the input data word (byte 1 and byte 2).

V. Write register 31 (reset code word)**Output Data**

Byte 0: Control byte	Byte 1: DataOUT1, high byte	Byte 2: DataOUT1, low byte
0xDF (1101 1111 _{bin})	0x00	0x00

Explanation:

- Bit 0.7 set means: Register communication switched on.
- Bit 0.6 set means: writing to the register.
- Bits 0.5 to 0.0 specify the register number 31 with 01 1111_{bin}.
- The output data word (byte 1 and byte 2) contains 0x0000 for reactivating write protection.


Input Data (answer of the Bus Terminal)

Byte 0: Status byte	Byte 1: DataIN1, high byte	Byte 2: DataIN1, low byte
0x9F (1001 1111 _{bin})	0xXX	0xXX

Explanation:

- The terminal returns a value as a receipt in the status byte that differs only in bit 0.6 from the value of the control byte.
- The input data word (byte 1 and byte 2) is of no importance after the write access. Any values still displayed are invalid!

6 TwinCAT

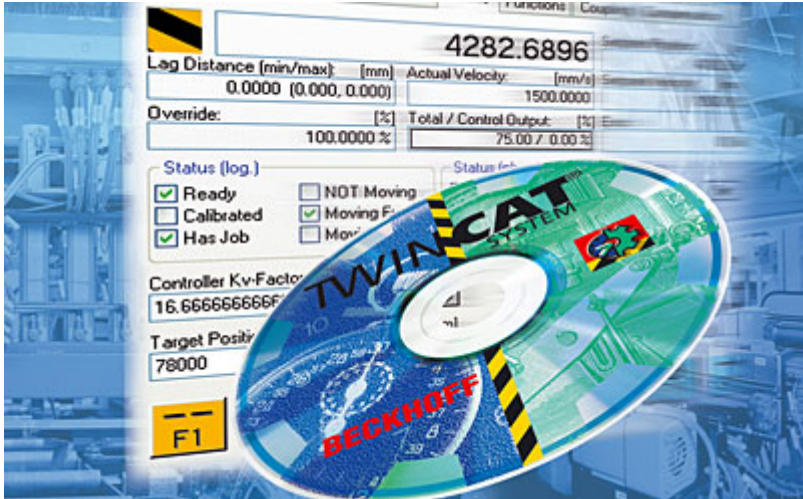

PLC and Motion Control on the PC

TwinCAT - The Windows Control and Automation Technology

The TwinCAT automation software converts any compatible PC into a real-time controller with multi-PLC, NC axis control, programming environment and operating station. TwinCAT replaces conventional PLC and NC controllers as well as operating devices:

- open, compatible PC hardware
- Embedding of IEC 61131-3 software PLC, software NC and software CNC in Windows
- Programming and runtime systems optionally together on one PC or separated
- Connection to all common fieldbus systems
- PC interfaces are supported
- Data communication with user interfaces and other programs by means of open Microsoft standards (OPC, OCX, DLL, etc.)

TwinCAT architecture

TwinCAT consists of runtime systems for real-time execution of control programs and development environments for programming, diagnosis and configuration. Any Windows programs, for instance visualization programs or Office programs, can access TwinCAT data via Microsoft interfaces, or can execute commands.

A practically oriented software solution

TwinCAT offers a precise time-base in which programs are executed with the highest deterministic features, independently of other processor tasks. The real-time load on a PC is set with TwinCAT: This achieves a defined operating behavior. TwinCAT displays the system load for running programs. A loading threshold can be set, in order to assure a defined computing capacity for the operating programs and for Windows. If this threshold is exceeded, a system message is generated.

TwinCAT supports system diagnosis

The general use of hardware and software from the open PC world requires some checking: Unsuitable components can upset the PC system. Beckhoff integrates a handy display of the real-time jitter in order to provide administrators with a simple means of evaluating hardware and software. A system message during operation can draw attention to error states.

Start/stop behavior

Depending on the setting, TwinCAT is started and stopped manually or automatically. Since TwinCAT is integrated into Windows as a service, an operator is not needed to start the system: switching on is enough.

Restarting and data backup

When a program is started or restarted, TwinCAT loads programs and remanent data. To backup data, and to shut down Windows correctly, a UPS (uninterruptible power supply) is of great value.

TwinCAT and "Blue Screen"

The TwinCAT system can be configured such that real-time capability is maintained in the event of a BSOD (Blue-Screen-of-Death) operating system crash. Real-time tasks such as PLC and NC can thus continue to run and place the controlled process in a safe state. Ultimately, it is the decision of the programmer whether or not to utilize this feature, bearing in mind that data or programs may already have been destroyed by the BSOD.

World-wide connection through message routing - "remote" connection is inherent to the system

According to the requirement for operating resources, the TwinCAT software devices can be distributed: TwinCAT PLC programs can be executed on PCs and on Beckhoff Bus Terminal controllers. A "message router" manages and distributes all the messages, both in the system and via TCP/IP connections. PC systems can be connected to one another by TCP/IP; Bus Terminal controllers are connected via serial interfaces and fieldbus systems (EtherCAT, Lightbus, PROFIBUS DP, PROFINET, Interbus, CANopen, DeviceNet, RS232, RS485, Ethernet TCP/IP, Ethernet/IP).

World-wide access

Since standard TCP/IP services from Windows are used, this data exchange can take place worldwide. The system offers scalable communication capacity and timeout periods for the monitoring of communications. OPC provides a standardized means for accessing many different SCADA packets. The SOAP (Simple Object Access Protocol) enables a connection between two computers to be established by means of an internet connection via standard HTTP. A TwinCAT component is available for this purpose.

Beckhoff Information System

Further information on the TwinCAT automation software can be found in the Beckhoff Information System.

The setup for installing the Beckhoff Information System is available to you on the Beckhoff *Products & Solutions* DVD and on our website for [download](#).

In addition, the online version of the Beckhoff Information System can be found at <https://infosys.beckhoff.com>.

6.1 TwinCAT libraries

TwinCAT libraries

See software documentation in the Beckhoff Information System.

TwinCAT 2: TwinCAT PLC Lib: [TcIoFunctions](#)

TwinCAT 3: TwinCAT 3 PLC Lib: [Tc2_IoFunctions](#)

7 Appendix

7.1 Support and Service

Beckhoff and their partners around the world offer comprehensive support and service, making available fast and competent assistance with all questions related to Beckhoff products and system solutions.

Beckhoff's branch offices and representatives

Please contact your Beckhoff branch office or representative for local support and service on Beckhoff products!

The addresses of Beckhoff's branch offices and representatives round the world can be found on her internet pages: www.beckhoff.com

You will also find further documentation for Beckhoff components there.

Support

The Beckhoff Support offers you comprehensive technical assistance, helping you not only with the application of individual Beckhoff products, but also with other, wide-ranging services:

- support
- design, programming and commissioning of complex automation systems
- and extensive training program for Beckhoff system components

Hotline: +49 5246 963 157
e-mail: support@beckhoff.com
web: www.beckhoff.com/support

Service

The Beckhoff Service Center supports you in all matters of after-sales service:

- on-site service
- repair service
- spare parts service
- hotline service

Hotline: +49 5246 963 460
e-mail: service@beckhoff.com
web: www.beckhoff.com/service

Headquarters Germany

Beckhoff Automation GmbH & Co. KG

Hülshorstweg 20
33415 Verl
Germany

Phone: +49 5246 963 0
e-mail: info@beckhoff.com
web: www.beckhoff.com

Table of figures

Fig. 1	KL1002.....	12
Fig. 2	KL1012.....	12
Fig. 3	KL1002 - LEDs and connection	14
Fig. 4	KL1012 - LEDs and connection	15
Fig. 5	KL1052.....	16
Fig. 6	KL1052 - LEDs and connection	18
Fig. 7	KL1104.....	19
Fig. 8	KL1114.....	19
Fig. 9	KL1104 - LEDs and connection	21
Fig. 10	KL1154.....	22
Fig. 11	KL1154 - LEDs and connection	24
Fig. 12	KL1164.....	25
Fig. 13	KL1164 - LEDs and connection	27
Fig. 14	KL1184.....	28
Fig. 15	KL1184 - LEDs and connection	30
Fig. 16	KL1194.....	31
Fig. 17	KL1194 - LEDs and connection	33
Fig. 18	KL1212.....	34
Fig. 19	KL1212 - LEDs and connection	36
Fig. 20	KL1302.....	37
Fig. 21	KL1302 - LEDs and connection	39
Fig. 22	KL1304.....	40
Fig. 23	KL1304 - LEDs and connection	42
Fig. 24	KL1312.....	43
Fig. 25	KL1312 - LEDs and connection	45
Fig. 26	KL1314.....	46
Fig. 27	KL1314 - LEDs and connection	48
Fig. 28	KL1402.....	49
Fig. 29	KL1412.....	49
Fig. 30	KL1402 - LEDs and connection	51
Fig. 31	KL1404.....	52
Fig. 32	KL1414.....	52
Fig. 33	KL1404 - LEDs and connection	54
Fig. 34	KL1434.....	55
Fig. 35	KL1434 - LEDs and connection	57
Fig. 36	KL1408.....	58
Fig. 37	KL1418.....	58
Fig. 38	KL1488.....	59
Fig. 39	KL1498.....	59
Fig. 40	KL1408 - LEDs and connection	61
Fig. 41	KL1488 - LEDs and connection	62
Fig. 42	KL1804.....	63
Fig. 43	KL1814.....	63
Fig. 44	KL1804 - LEDs and connection	65

Fig. 45	KL1808.....	66
Fig. 46	KL1808 - LEDs and connection	68
Fig. 47	KL1809.....	69
Fig. 48	KL1809 - LEDs and connection	71
Fig. 49	KL1819.....	72
Fig. 50	KL1819 - LEDs and connection	74
Fig. 51	KL1859.....	75
Fig. 52	KL1859 - LEDs and connection	77
Fig. 53	KL1862 and KL1862-0010	78
Fig. 54	KL1872.....	78
Fig. 55	KL1862 - LEDs and connection	80
Fig. 56	KL1889.....	81
Fig. 57	KL1889 - LEDs and connection	83
Fig. 58	Spring contacts of the Beckhoff I/O components	84
Fig. 59	Attaching on mounting rail.....	85
Fig. 60	Power contact on left side	86
Fig. 61	Disassembling of terminal	87
Fig. 62	Standard wiring	89
Fig. 63	Pluggable wiring	89
Fig. 64	High Density Terminals	90
Fig. 65	Connecting a cable on a terminal point.....	91
Fig. 66	KS2000 configuration software	96

Trademark statements

Beckhoff®, ATRO®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, MX-System®, Safety over EtherCAT®, TC/BSD®, TwinCAT®, TwinCAT/BSD®, TwinSAFE®, XFC®, XPlanar® and XTS® are registered and licensed trademarks of Beckhoff Automation GmbH.

Third-party trademark statements

DeviceNet and EtherNet/IP are trademarks of ODVA, Inc.

Microsoft, Microsoft Azure, Microsoft Edge, PowerShell, Visual Studio, Windows and Xbox are trademarks of the Microsoft group of companies.

More Information:
www.beckhoff.com/KL1xxx

Beckhoff Automation GmbH & Co. KG
Hülshorstweg 20
33415 Verl
Germany
Phone: +49 5246 9630
info@beckhoff.com
www.beckhoff.com

